

Anex

Cooler Master MWE Gold 1250 V2 (GX Gold 1250)

Lab ID#: CM12501854
 Receipt Date: May 28, 2021
 Test Date: Jun 4, 2021

Report: 21PS1854A
 Report Date: Jun 10, 2021

DUT INFORMATION

Brand	Cooler Master
Manufacturer (OEM)	Xin Hui Yuan Tech (Fusion Power)
Series	MWE Gold V2 / GX Gold
Model Number	MPE-C501-AFCAG
Serial Number	MPEA501AFCAG001
DUT Notes	

DUT SPECIFICATIONS

Rated Voltage (Vrms)	100-240
Rated Current (Arms)	15-7
Rated Frequency (Hz)	50-60
Rated Power (W)	1250
Type	ATX12V
Cooling	140mm Rifle Bearing Fan (EFS-14E12D)
Semi-Passive Operation	✓
Cable Design	Fully Modular

TEST EQUIPMENT

Electronic Loads	Chroma 63601-5 x4 Chroma 63600-2 x2 63640-80-80 x20 63610-80-20 x2
AC Sources	Chroma 6530, Keysight AC6804B
Power Analyzers	N4L PPA1530 x2
Sound Analyzer	Bruel & Kjaer 2270 G4
Microphone	Bruel & Kjaer Type 4955-A
Data Loggers	Picoscope TC-08 x2, Labjack U3-HV x2
Tachometer	UNI-T UT372 x2
Digital Multimeter	Keysight U1273AX, Fluke 289, Keithley 2015 - THD
UPS	CyberPower OLS3000E 3kVA x2
Transformer	3kVA x2

All data and graphs included in this test report can be used by any individual on the following conditions:

- > It should be mentioned that the test results are provided by Cybenetics
- > The link to the original test results document should be provided in any case

Anex

Cooler Master MWE Gold 1250 V2 (GX Gold 1250)

RESULTS

Temperature Range (°C /°F)	30-32 / 86-89.6
ErP Lot 3/6 Ready	✓
(EU) No 617/2013 Compliance	✓
ALPM (Alternative Low Power Mode) compatible	✓

115V

Average Efficiency	89.076%
Efficiency With 10W (≤500W) or 2% (>500W)	70.986
Average Efficiency 5VSB	81.194%
Standby Power Consumption (W)	0.0522000
Average PF	0.983
Avg Noise Output	36.19 dB(A)
Efficiency Rating (ETA)	PLATINUM
Noise Rating (LAMBDA)	Standard+

230V

Average Efficiency	91.214%
Average Efficiency 5VSB	80.750%
Standby Power Consumption (W)	0.0884000
Average PF	0.960
Avg Noise Output	37.12 dB(A)
Efficiency Rating (ETA)	PLATINUM
Noise Rating (LAMBDA)	Standard+

POWER SPECIFICATIONS

Rail		3.3V	5V	12V	5VSB	-12V
Max. Power	Amps	20	20	104	3	0.3
	Watts	120		1248	15	3.6
Total Max. Power (W)		1250				

HOLD-UP TIME & POWER OK SIGNAL (230V)

Hold-Up Time (ms)	30.6
AC Loss to PWR_OK Hold Up Time (ms)	26.6
PWR_OK Inactive to DC Loss Delay (ms)	4

All data and graphs included in this test report can be used by any individual on the following conditions:

- > It should be mentioned that the test results are provided by Cybenetics
- > The link to the original test results document should be provided in any case

Anex

Cooler Master MWE Gold 1250 V2 (GX Gold 1250)

CABLES AND CONNECTORS

Modular Cables

Description	Cable Count	Connector Count (Total)	Gauge	In Cable Capacitors
ATX connector 20+4 pin (650mm)	1	1	18AWG	No
4+4 pin EPS12V (650mm)	1	1	18AWG	No
8 pin EPS12V (650mm)	1	1	18AWG	No
6+2 pin PCIe (560mm+120mm)	4	8	16-18AWG	No
SATA (520mm+120mm+120mm+120mm)	3	12	18AWG	No
4 pin Molex (500mm+120mm+120mm+120mm)	1	4	18AWG	No
AC Power Cord (1430mm) - C13 coupler	1	1	16AWG	-

All data and graphs included in this test report can be used by any individual on the following conditions:

- > It should be mentioned that the test results are provided by Cybenetics
- > The link to the original test results document should be provided in any case

PAGE 3/17

Anex Cooler Master MWE Gold 1250 V2 (GX Gold 1250)

General Data	-
Manufacturer (OEM)	Xin Hui Yuan Tech (Fusion Power)
PCB Type	Double Sided
Primary Side	-
Transient Filter	4x Y caps, 2x X caps, 2x CM chokes, 1x MOV
Inrush Protection	NTC Thermistor MF72-5D15 (5 Ohm) & Relay
Bridge Rectifier(s)	2x GBU2506 (800V, 10A @ 100°C)
APFC MOSFETs	2x SemiHow HCA60R099 (600V, 19.4A @ 100°C, Rds(on): 0.0990hm)
APFC Boost Diode	1x Global Power Technology G3S06508A (650V, 8A @ 150°C)
Bulk Cap(s)	2x TK (450V, 680uF each or 1360uF combined, 2,000h @ 105°C, LGW)
Main Switchers	4x NCE Power NCE65T180F (650V, 13.2A @ 105°C, Rds(on): 0.180hm)
APFC Controller	Champion CM6500UN
Resonant Controller	Champion CM6901T6X
Topology	Primary side: Full-Bridge & LLC converter Secondary side: Synchronous Rectification & DC-DC converters
Secondary Side	-
+12V MOSFETs	8x Excelliance MOS Corp EMP16N04HS (40V, 100A @ 100°C, Rds(on):1.6mOhm)
5V & 3.3V	DC-DC Converters: 6x UBIQ QM3004D (30V, 40A @ 100°C, Rds(on): 8.5mOhm) PWM Controllers: uPI Semi uP3861P
Filtering Capacitors	Electrolytic: 3x Nippon Chemi-Con (105°C, W), 1x Nippon Chemi-Con (2-5,000h @ 105°C, KZE), 10x Nippon Chemi-Con (4-10,000h @ 105°C, KY) Polymer: 22x FPCAP, 9x United Chemi-Con
Supervisor IC	IN1S424I-SDG
Fan Model	DWPH EFS-14E12D (140mm, 12V, 0.80A, Rifle Bearing Fan)
5VSB Circuit	-
Rectifier	1x 60R10S
Standby PWM Controller	Excelliance MOS Corp EM8569C

All data and graphs included in this test report can be used by any individual on the following conditions:


- > It should be mentioned that the test results are provided by Cybenetics
- > The link to the original test results document should be provided in any case

Anex

Cooler Master MWE Gold 1250 V2 (GX Gold 1250)

EFFICIENCY UNDER HIGH AMBIENT TEMPERATURE

Efficiency: Cooler Master MWE Gold 1250 V2
Ambient: 37°C - 47°C (98.6°F - 116.6°F)

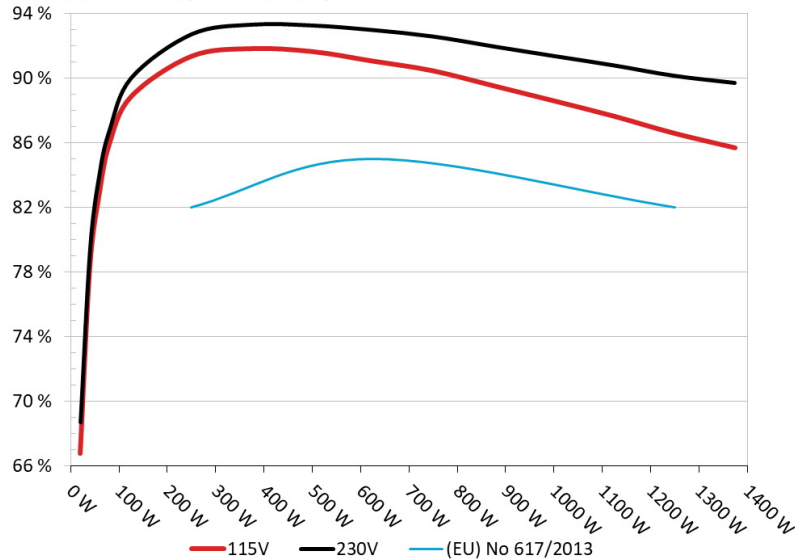


INFO

The PSU's efficiency under high ambient temperatures with 115V and 230V input. For this graph the results of the 10-110% load regulation table are used

5VSB EFFICIENCY

5VSB Efficiency: Cooler Master MWE Gold 1250 V2
Ambient: 34°C - 36°C (93.2°F - 96.8°F)

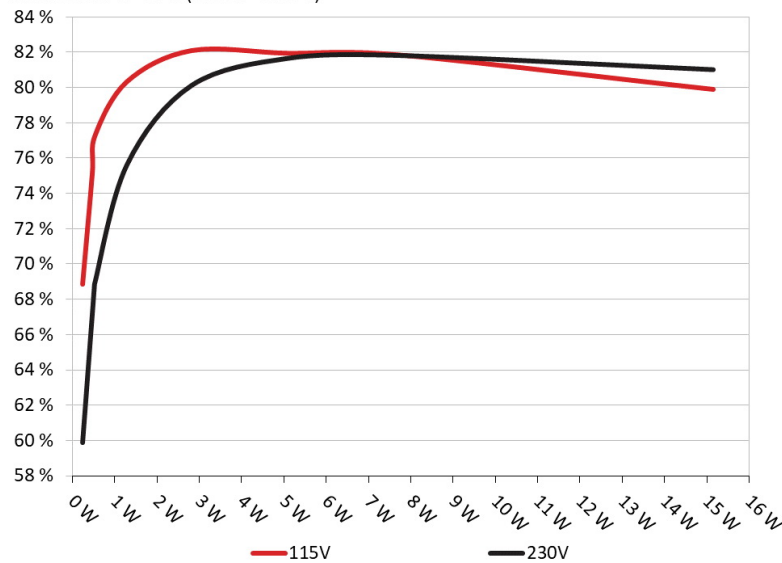

INFO

This graph depicts the efficiency levels of the 5VSB rail with 115V and 230V input

All data and graphs included in this test report can be used by any individual on the following conditions:

- > It should be mentioned that the test results are provided by Cybenetics
- > The link to the original test results document should be provided in any case

Anex

Cooler Master MWE Gold 1250 V2 (GX Gold 1250)

5VSB EFFICIENCY (ERP LOT 3/6 & CEC)

Test #	5VSB	DC/AC (Watts)	Efficiency	PF/AC Volts
1	0.045A	0.230	68.862%	0.052
	5.115V	0.334		115.16V
2	0.090A	0.460	75.163%	0.092
	5.114V	0.612		115.16V
3	0.550A	2.807	82.076%	0.321
	5.104V	3.420		115.16V
4	1.000A	5.094	81.923%	0.397
	5.095V	6.218		115.16V
5	1.500A	7.625	81.848%	0.436
	5.084V	9.316		115.16V
6	2.999A	15.148	79.882%	0.490
	5.051V	18.963		115.16V

5VSB EFFICIENCY -230V (ERP LOT 3/6 & CEC)

Test #	5VSB	DC/AC (Watts)	Efficiency	PF/AC Volts
1	0.045A	0.230	59.896%	0.019
	5.114V	0.384		230.31V
2	0.090A	0.460	68.862%	0.032
	5.113V	0.668		230.31V
3	0.550A	2.807	80.108%	0.150
	5.104V	3.504		230.31V
4	1.000A	5.094	81.648%	0.229
	5.094V	6.239		230.31V
5	1.500A	7.625	81.813%	0.286
	5.084V	9.320		230.31V
6	3.000A	15.151	81.004%	0.370
	5.051V	18.704		230.31V

All data and graphs included in this test report can be used by any individual on the following conditions:

- > It should be mentioned that the test results are provided by Cybenetics
- > The link to the original test results document should be provided in any case

Anex

Cooler Master MWE Gold 1250 V2 (GX Gold 1250)

115V

All data and graphs included in this test report can be used by any individual on the following conditions:


- > It should be mentioned that the test results are provided by Cybenetics
- > The link to the original test results document should be provided in any case

PAGE 7/17

Anex

Cooler Master MWE Gold 1250 V2 (GX Gold 1250)


EFFICIENCY GRAPH 115V

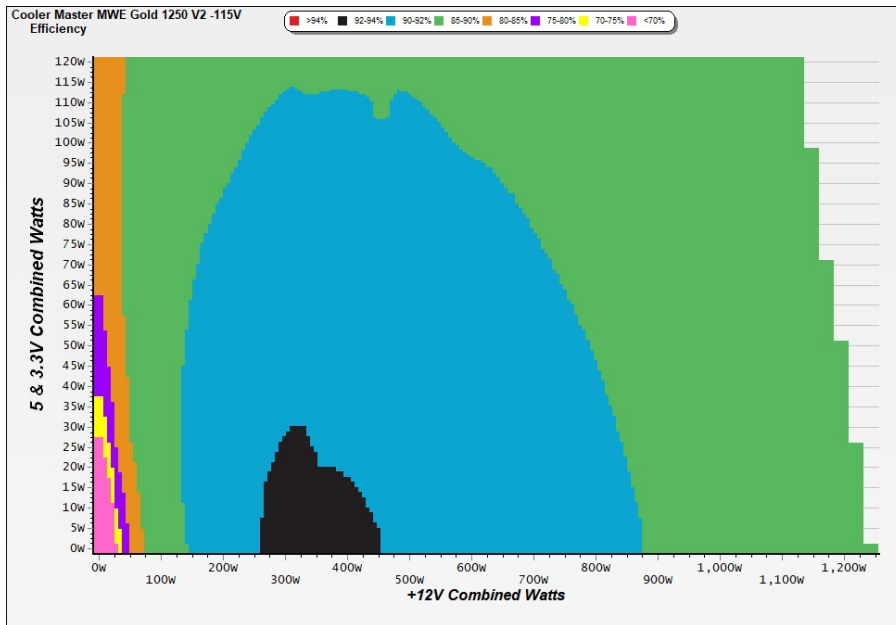

INFO

This graph depicts the PSU's efficiency throughout its entire operational range. For the generation of the efficiency and noise graphs we set our loaders to auto mode through our custom-made software before trying thousands of possible load combinations

NOISE GRAPH 115V

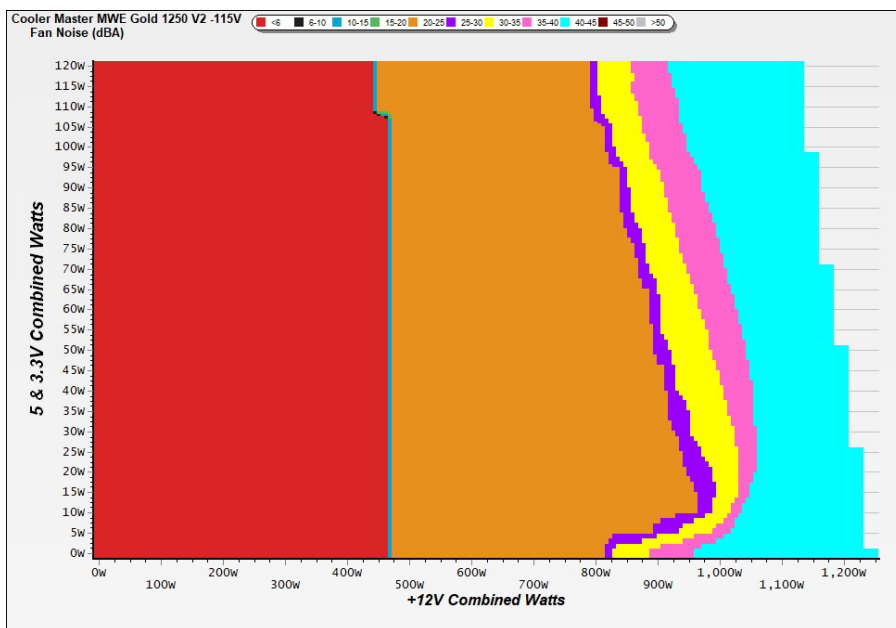

INFO


The PSU's noise in its entire operational range and under 30-32 °C ambient is depicted in this graph. The X axis represents the load on the +12V rail(s) while the Y axis is the load on the minor rails

All data and graphs included in this test report can be used by any individual on the following conditions:

- > It should be mentioned that the test results are provided by Cybenetics
- > The link to the original test results document should be provided in any case

VAMPIRE POWER -115V

Power - MPEA501AFCAG001 - 01/06/2021 - 08:40

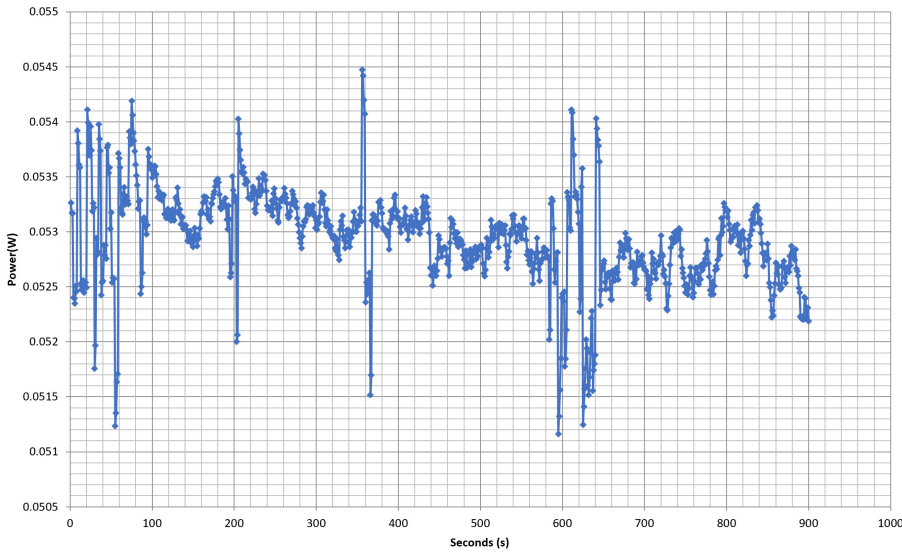

INFO

This graph is generated by the PPA Standby Power Analysis software which takes full control of the power analyzer during the whole procedure. This application features all of the EN50564 & IEC62301 test limits for standby power software testing

All data and graphs included in this test report can be used by any individual on the following conditions:

- > It should be mentioned that the test results are provided by Cybenetics
- > The link to the original test results document should be provided in any case

Anex

Cooler Master MWE Gold 1250 V2 (GX Gold 1250)

TYPICAL LOAD TESTS 115V

Test #	12V	5V	3.3V	5VSB	DC/AC (Watts)	Efficiency	Fan Speed (RPM)	PSU Noise (dB[A])	Temps (In/Out)	PF/AC Volts
1	8.495A	1.992A	1.972A	0.982A	125.004	88.831%	0	<6.0	45.15°C	0.978
	12.173V	5.020V	3.345V	5.090V	140.721				40.51°C	115.14V
2	18.004A	2.989A	2.962A	1.182A	249.987	91.337%	0	<6.0	46.29°C	0.973
	12.169V	5.017V	3.342V	5.077V	273.697				40.93°C	115.13V
3	27.798A	3.491A	3.462A	1.382A	374.246	91.808%	0	<6.0	47.16°C	0.976
	12.166V	5.013V	3.338V	5.064V	407.642				41.24°C	115.13V
4	37.668A	3.995A	3.959A	1.584A	499.409	91.630%	0	<6.0	48.19°C	0.982
	12.164V	5.010V	3.334V	5.051V	545.029				41.51°C	115.13V
5	47.231A	4.991A	4.952A	1.787A	624.795	91.038%	903	22.6	42.75°C	0.985
	12.159V	5.010V	3.334V	5.036V	686.299				50.09°C	115.12V
6	56.723A	5.994A	5.948A	1.991A	749.329	90.439%	920	23.2	43.07°C	0.987
	12.156V	5.006V	3.329V	5.022V	828.549				50.84°C	115.11V
7	66.285A	6.996A	6.946A	2.195A	874.591	89.509%	1868	44.2	43.23°C	0.989
	12.152V	5.003V	3.326V	5.008V	977.101				51.38°C	115.10V
8	75.865A	8.003A	7.945A	2.402A	999.934	88.574%	1883	44.4	44.26°C	0.990
	12.147V	5.000V	3.322V	4.993V	1128.923				52.84°C	115.09V
9	85.820A	8.506A	8.437A	2.407A	1124.845	87.617%	1890	44.5	44.43°C	0.992
	12.146V	4.995V	3.318V	4.983V	1283.814				53.59°C	115.08V
10	95.536A	9.013A	8.959A	3.023A	1249.591	86.561%	1901	44.9	45.17°C	0.993
	12.141V	4.992V	3.315V	4.961V	1443.592				54.89°C	115.07V
11	105.835A	9.019A	8.963A	3.028A	1374.410	85.666%	1907	44.9	46.61°C	0.993
	12.139V	4.989V	3.312V	4.953V	1604.391				57.27°C	115.06V
CL1	0.115A	14.000A	13.997A	0.000A	118.249	82.181%	907	22.6	42.45°C	0.979
	12.180V	5.015V	3.332V	5.099V	143.888				50.05°C	115.16V
CL2	103.988A	1.000A	0.999A	1.000A	1275.938	86.918%	1900	44.6	45.18°C	0.992
	12.139V	4.996V	3.323V	5.013V	1467.974				54.43°C	115.07V

All data and graphs included in this test report can be used by any individual on the following conditions:

- > It should be mentioned that the test results are provided by Cybenetics
- > The link to the original test results document should be provided in any case

PAGE 10/17

Anex Cooler Master MWE Gold 1250 V2 (GX Gold 1250)

LIGHT LOAD TESTS 115V

Test #	12V	5V	3.3V	5VSB	DC/AC (Watts)	Efficiency	Fan Speed (RPM)	PSU Noise (dB[A])	PF/AC Volts
1	1.218A	0.498A	0.493A	0.196A	19.977	66.741%	0	<6.0	0.921
	12.169V	5.022V	3.348V	5.115V	29.932				115.15V
2	2.437A	0.995A	0.985A	0.391A	39.966	78.334%	0	<6.0	0.951
	12.175V	5.024V	3.350V	5.109V	51.020				115.14V
3	3.660A	1.493A	1.476A	0.588A	59.998	82.939%	0	<6.0	0.969
	12.174V	5.023V	3.348V	5.103V	72.340				115.15V
4	4.876A	1.990A	1.972A	0.784A	79.951	85.875%	0	<6.0	0.970
	12.174V	5.022V	3.347V	5.097V	93.102				115.14V

RIPPLE MEASUREMENTS 115V

Test	12V	5V	3.3V	5VSB	Pass/Fail
10% Load	12.70mV	3.00mV	7.50mV	8.10mV	Pass
20% Load	14.50mV	3.60mV	7.70mV	8.30mV	Pass
30% Load	9.90mV	3.80mV	8.10mV	9.10mV	Pass
40% Load	9.30mV	3.70mV	7.80mV	10.30mV	Pass
50% Load	9.40mV	4.50mV	9.20mV	10.30mV	Pass
60% Load	9.50mV	5.10mV	9.40mV	10.80mV	Pass
70% Load	11.10mV	5.60mV	8.90mV	11.10mV	Pass
80% Load	11.90mV	6.60mV	12.20mV	12.10mV	Pass
90% Load	12.70mV	9.10mV	14.90mV	12.00mV	Pass
100% Load	19.80mV	10.20mV	15.70mV	14.50mV	Pass
110% Load	22.00mV	11.50mV	16.30mV	15.80mV	Pass
Crossload1	15.70mV	6.10mV	14.80mV	11.20mV	Pass
Crossload2	20.50mV	9.60mV	12.30mV	13.90mV	Pass

All data and graphs included in this test report can be used by any individual on the following conditions:

- > It should be mentioned that the test results are provided by Cybenetics
- > The link to the original test results document should be provided in any case

Anex

Cooler Master MWE Gold 1250 V2 (GX Gold 1250)

230V

All data and graphs included in this test report can be used by any individual on the following conditions:


- > It should be mentioned that the test results are provided by Cybenetics
- > The link to the original test results document should be provided in any case

PAGE 12/17

Anex

Cooler Master MWE Gold 1250 V2 (GX Gold 1250)


EFFICIENCY GRAPH 230V

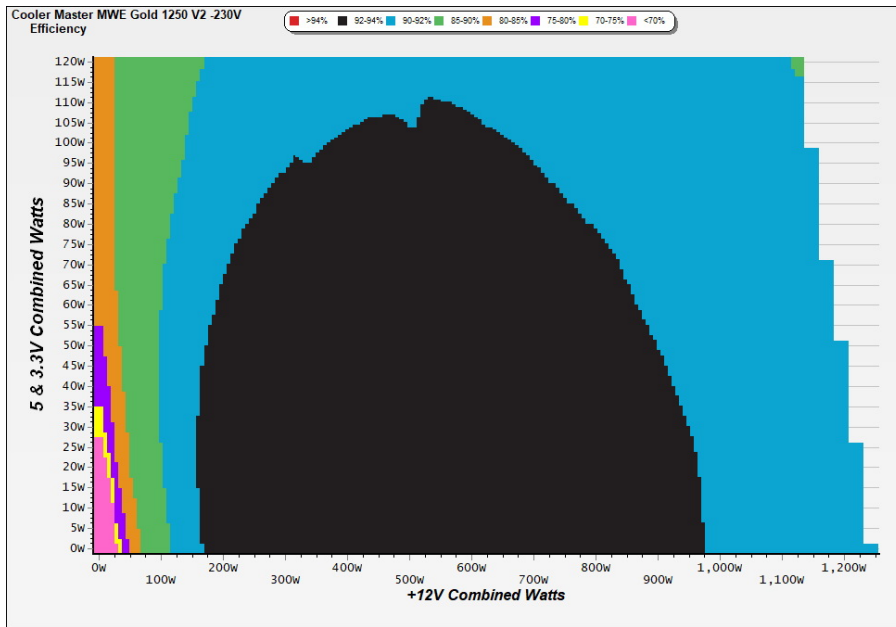

INFO

This graph depicts the PSU's efficiency throughout its entire operational range. For the generation of the efficiency and noise graphs we set our loaders to auto mode through our custom-made software before trying thousands of possible load combinations

NOISE GRAPH 230V

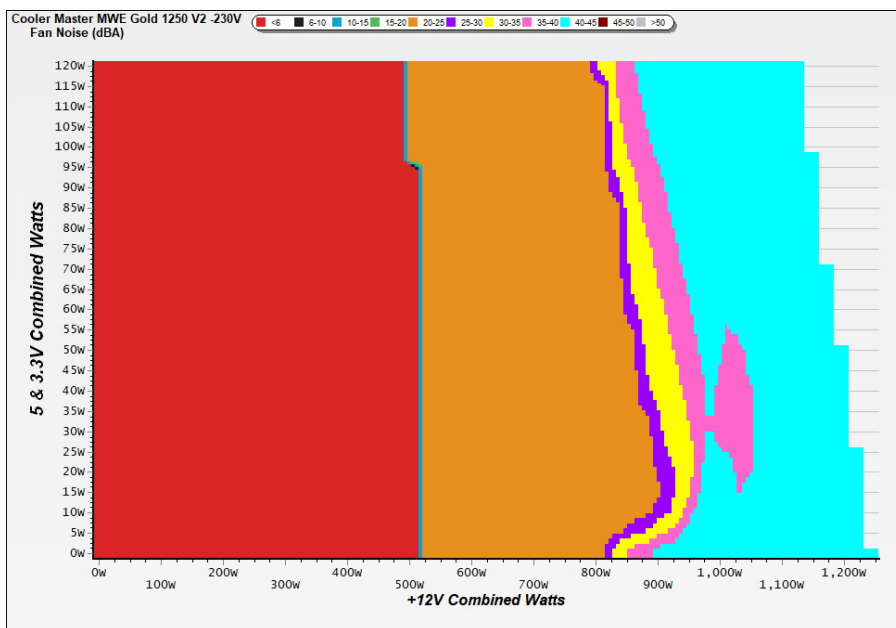

INFO


The PSU's noise in its entire operational range and under 30-32 °C ambient is depicted in this graph. The X axis represents the load on the +12V rail(s) while the Y axis is the load on the minor rails

All data and graphs included in this test report can be used by any individual on the following conditions:

- > It should be mentioned that the test results are provided by Cybenetics
- > The link to the original test results document should be provided in any case

VAMPIRE POWER -230V

Power - MPEA501AFCAG001 - 01/06/2021 - 08:40

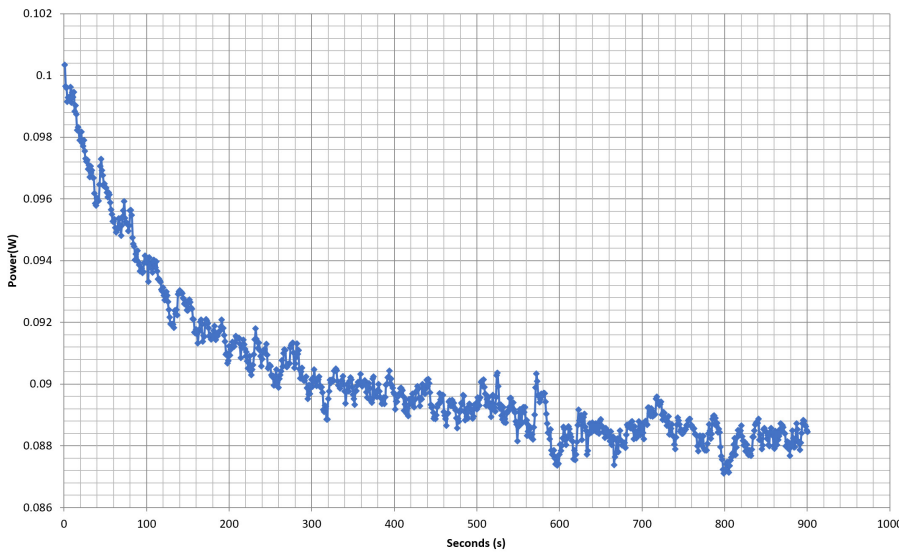

INFO

This graph is generated by the PPA Standby Power Analysis software which takes full control of the power analyzer during the whole procedure. This application features all of the EN50564 & IEC62301 test limits for standby power software testing

All data and graphs included in this test report can be used by any individual on the following conditions:

- > It should be mentioned that the test results are provided by Cybenetics
- > The link to the original test results document should be provided in any case

Anex

Cooler Master MWE Gold 1250 V2 (GX Gold 1250)

TYPICAL LOAD TESTS 230V

Test #	12V	5V	3.3V	5VSB	DC/AC (Watts)	Efficiency	Fan Speed (RPM)	PSU Noise (dB[A])	Temps (In/Out)	PF/AC Volts
1	8.495A	1.991A	1.974A	0.982A	125.015	90.019%	0	<6.0	44.79°C	0.909
	12.175V	5.019V	3.342V	5.090V	138.876				40.67°C	230.32V
2	18.002A	2.991A	2.965A	1.182A	250.003	92.720%	0	<6.0	46.29°C	0.948
	12.171V	5.015V	3.339V	5.076V	269.631				41.36°C	230.32V
3	27.797A	3.492A	3.463A	1.383A	374.264	93.310%	0	<6.0	47.40°C	0.961
	12.167V	5.012V	3.336V	5.063V	401.098				41.71°C	230.32V
4	37.672A	3.993A	3.960A	1.584A	499.443	93.261%	0	<6.0	48.37°C	0.967
	12.164V	5.010V	3.333V	5.049V	535.531				41.96°C	230.32V
5	47.229A	4.992A	4.951A	1.788A	624.802	92.981%	907	22.6	42.39°C	0.971
	12.160V	5.009V	3.331V	5.034V	671.969				49.53°C	230.33V
6	56.724A	5.994A	5.950A	1.992A	749.343	92.581%	965	24.6	43.07°C	0.974
	12.156V	5.006V	3.328V	5.020V	809.395				50.99°C	230.32V
7	66.298A	6.996A	6.947A	2.197A	874.617	91.965%	1698	41.6	43.38°C	0.977
	12.150V	5.003V	3.325V	5.005V	951.034				51.55°C	230.32V
8	75.879A	8.002A	7.943A	2.404A	999.943	91.372%	1877	44.2	44.32°C	0.979
	12.145V	5.000V	3.322V	4.990V	1094.362				53.16°C	230.32V
9	85.839A	8.506A	8.439A	2.408A	1124.826	90.788%	1888	44.5	45.30°C	0.981
	12.143V	4.996V	3.317V	4.981V	1238.965				54.58°C	230.32V
10	95.557A	9.012A	8.957A	3.025A	1249.654	90.146%	1892	44.5	45.10°C	0.982
	12.139V	4.993V	3.315V	4.958V	1386.261				55.20°C	230.31V
11	105.888A	9.015A	8.964A	3.030A	1374.324	89.710%	1895	44.6	46.56°C	0.984
	12.132V	4.991V	3.313V	4.950V	1531.970				57.35°C	230.31V
CL1	0.115A	14.001A	13.997A	0.000A	118.295	83.380%	900	22.4	42.28°C	0.911
	12.178V	5.017V	3.333V	5.098V	141.875				49.78°C	230.33V
CL2	103.996A	1.000A	1.000A	1.000A	1276.148	90.478%	1895	44.6	45.08°C	0.983
	12.143V	4.994V	3.321V	5.010V	1410.444				55.71°C	230.31V

All data and graphs included in this test report can be used by any individual on the following conditions:

- > It should be mentioned that the test results are provided by Cybenetics
- > The link to the original test results document should be provided in any case

Anex

Cooler Master MWE Gold 1250 V2 (GX Gold 1250)

LIGHT LOAD TESTS 230V

Test #	12V	5V	3.3V	5VSB	DC/AC (Watts)	Efficiency	Fan Speed (RPM)	PSU Noise (dB[A])	PF/AC Volts
1	1.219A	0.496A	0.493A	0.196A	19.978	68.714%	0	<6.0	0.631
	12.171V	5.020V	3.344V	5.115V	29.074				230.32V
2	2.436A	0.995A	0.987A	0.391A	39.966	79.517%	0	<6.0	0.770
	12.179V	5.022V	3.347V	5.109V	50.261				230.32V
3	3.658A	1.494A	1.480A	0.588A	59.999	84.202%	0	<6.0	0.831
	12.178V	5.021V	3.345V	5.103V	71.256				230.32V
4	4.874A	1.991A	1.975A	0.785A	79.951	86.773%	0	<6.0	0.870
	12.177V	5.020V	3.344V	5.097V	92.138				230.32V

RIPPLE MEASUREMENTS 230V

Test	12V	5V	3.3V	5VSB	Pass/Fail
10% Load	14.90mV	3.20mV	6.80mV	8.10mV	Pass
20% Load	15.20mV	3.70mV	7.30mV	7.70mV	Pass
30% Load	10.60mV	3.70mV	8.90mV	8.50mV	Pass
40% Load	9.80mV	3.80mV	8.00mV	9.60mV	Pass
50% Load	9.80mV	5.00mV	8.90mV	10.20mV	Pass
60% Load	9.90mV	5.40mV	9.50mV	10.90mV	Pass
70% Load	10.40mV	5.30mV	9.00mV	10.70mV	Pass
80% Load	11.00mV	6.30mV	11.80mV	11.10mV	Pass
90% Load	12.00mV	8.90mV	13.60mV	11.30mV	Pass
100% Load	19.40mV	10.80mV	16.30mV	12.70mV	Pass
110% Load	23.70mV	11.40mV	15.70mV	13.10mV	Pass
Crossload1	16.10mV	6.00mV	14.60mV	11.20mV	Pass
Crossload2	19.70mV	9.70mV	12.40mV	11.80mV	Pass

All data and graphs included in this test report can be used by any individual on the following conditions:


- > It should be mentioned that the test results are provided by Cybenetics
- > The link to the original test results document should be provided in any case

Anex

Cooler Master MWE Gold 1250 V2 (GX Gold 1250)




Top side

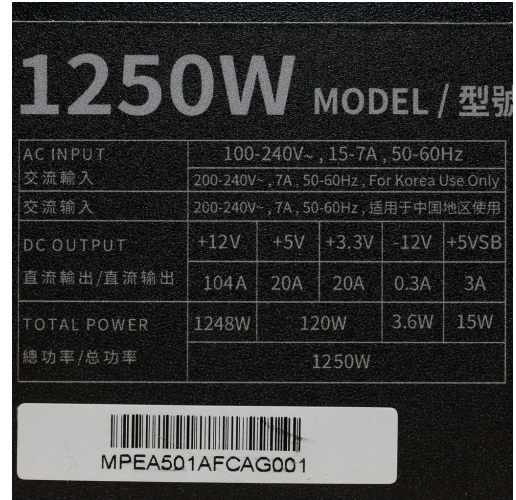

Power specifications label

CERTIFICATIONS 115V

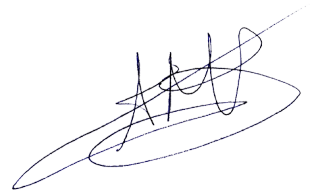Aristeidis Bitziopoulos
Lab Director

CERTIFICATIONS 230V



All data and graphs included in this test report can be used by any individual on the following conditions:

- > It should be mentioned that the test results are provided by Cybenetics
- > The link to the original test results document should be provided in any case