

Anex

Corsair RM850x

Lab ID#: 79
Receipt Date: -
Test Date: -

Report:

Report Date: Jan 4, 2018

| DUT INFORMATION | |
|--------------------|-------------------------------------|
| Brand | Corsair |
| Manufacturer (OEM) | Channel Well Technology |
| Series | RMx |
| Model Number | RM850x |
| Serial Number | 16447135000017590888 |
| DUT Notes | CP-9020093 - Retested on 11/10/2017 |

| DUT SPECIFICATIONS | |
|------------------------|----------------------------------|
| Rated Voltage (Vrms) | 100-240 |
| Rated Current (Arms) | 12-6 |
| Rated Frequency (Hz) | 47-63 |
| Rated Power (W) | 850 |
| Type | ATX12V |
| Cooling | 135mm Rifle Bearing Fan (NR135L) |
| Semi-Passive Operation | ✓ |
| Cable Design | Fully Modular |

| POWER SPECIFICATIONS | | | | | | |
|----------------------|-------|------|----|------|------|------|
| Rail | | 3.3V | 5V | 12V | 5VSB | -12V |
| Max. Power | Amps | 25 | 25 | 70.8 | 3 | 0.8 |
| | Watts | 150 | | 850 | 15 | 9.6 |
| Total Max. Power (W) | | 850 | | | | |

| CABLES AND CONNECTORS | | | | |
|---------------------------------------|-------------|-------------------------|----------|---------------------|
| Modular Cables | | | | |
| Description | Cable Count | Connector Count (Total) | Gauge | In Cable Capacitors |
| ATX connector 20+4 pin (600mm) | 1 | 1 | 18-20AWG | Yes |
| 4+4 pin EPS12V (650mm) | 2 | 2 | 18AWG | Yes |
| 6+2 pin PCIe (600mm+150mm) | 3 | 6 | 18AWG | Yes |
| SATA (520mm+115mm+115mm) | 2 | 6 | 18AWG | No |
| SATA (505mm+115mm+115mm+115mm) | 1 | 4 | 18AWG | No |
| 4 pin Molex (450mm+100mm+100mm+100mm) | 2 | 8 | 18AWG | No |
| FDD Adapter (+100mm) | 1 | 1 | 20AWG | No |
| AC Power Cord (1430mm) - C13 coupler | 1 | 1 | 16AWG | - |

All data and graphs included in this test report can be used by any individual on the following conditions:

- > It should be mentioned that the test results are provided by Cybenetics
- > The link to the original test results document should be provided in any case

PAGE 1/9

Anex

Corsair RM850x

| General Data | |
|------------------------|---|
| Manufacturer (OEM) | CWT |
| Primary Side | |
| Transient Filter | 6x Y caps, 2x X caps, 2x CM chokes, 1x MOV |
| Inrush Protection | NTC Thermistor |
| Bridge Rectifier(s) | 2x GBJ1510 (700V, 15A @ 100°C) |
| APFC MOSFETS | 2x Vishay SiHF22N60E (650V, 13A @ 100°C, 0.18 Ohm) |
| APFC Boost Diode | 1x Power Intergrations QH08TZ600 (600V, 8A @ 150°C) |
| Hold-up Cap(s) | 2x Nichicon (400V, 470uF eachor 940uF combined, 2000h @ 105°C, GG) |
| Main Switchers | 2x Vishay SiHG20N50C (560V, 11A @ 100°C, 0.27Ohm) |
| APFC Controller | Infineon ICE3PCS01G - CM03X |
| Switching Controller | Infineon ICE2HS01G |
| Topology | Primary side: Half-Bridge & LLC Resonant Controller Secondary side: Synchronous Rectification & DC-DC converters |
| Secondary Side | |
| +12V MOSFETS | 6x Inte ational Rectifier IRFH7004TRPBF (40V, 164A @ 100°C, 1.4 mOhm) |
| 5V & 3.3V | DC-DC Converters: 4x QM3004D (30V, 40A @ 100°C, 8.5 mOhm) 2x QM3006D (30V, 57A @ 100°C, 5.5 mOhm) PWM Controller: Anpec APW7159 |
| Filtering Capacitors | Electrolytics: Nippon Chemi-Con (1-5,000 @ 105°C, KZE), Nippon Chemi-Con (4-10,000 @ 105°C, KY), Nippon Chemi-Con (5-6,000 @ 105°C, KZH) Polymers: Fpcap |
| Supervisor IC | Weltrend WT7502 (OVP, UVP, SCP, PG), LM358 |
| Fan Model | NR135L (12V, 0.22A, Rifle Bearing) |
| 5VSB Circuit | |
| Rectifier | SD04N65A FET, QM3004D FET, MBRU2045CT SBR (45V, 20A @ 125°C) |
| Standby PWM Controller | On-Bright OB5269CP |

All data and graphs included in this test report can be used by any individual on the following conditions:

- > It should be mentioned that the test results are provided by Cybenetics
- > The link to the original test results document should be provided in any case

PAGE 2/9


| RESULTS | |
|--|-----------------|
| Temperature Range (°C /°F) | 30-32 / 86-89.6 |
| Average Efficiency | 88.315 |
| Efficiency With 10W (≤500W) or 2% (>500W) Load -115V | 0.000 |
| Average Efficiency 5VSB | 81.310 |
| Standby Power Consumption (W) -115V | 0.0439193 |
| Standby Power Consumption (W) -230V | 0.0806408 |
| Average PF | 0.993 |
| ErP Lot 3/6 Ready | ✓ |
| (EU) No 617/2013 Compliance | ✓ |
| Avg Noise Output | 19.95 |
| Efficiency Rating (ETA) | PLATINUM |
| Noise Rating (LAMBDA) | A+ |

| TEST EQUIPMENT | | |
|------------------|--|---|
| Electronic Loads | Chroma 6314A x2 63123A x6 63102A 63101A | Chroma 63601-5 x2 Chroma 63600-2 63640-80-80 x10 63610-80-20 |
| AC Sources | Chroma 6530, Chroma 61604 | |
| Power Analyzers | N4L PPA1530, N4L PPA5530 | |
| Oscilloscopes | Picoscope 4444 & 3424, Keysight DSOX3024A, Rigol DS2072A | |
| Voltmeter | Keithley 2015 THD 6.5 Digit | |
| Sound Analyzer | Bruel & Kjaer 2250-L G4 | |
| Microphone | Bruel & Kjaer Type 4189 | |
| Data Loggers | Picoscope TC-08 x2, Labjack U3-HV x2 | |

All data and graphs included in this test report can be used by any individual on the following conditions:

- > It should be mentioned that the test results are provided by Cybenetics
- > The link to the original test results document should be provided in any case


EFFICIENCY GRAPH

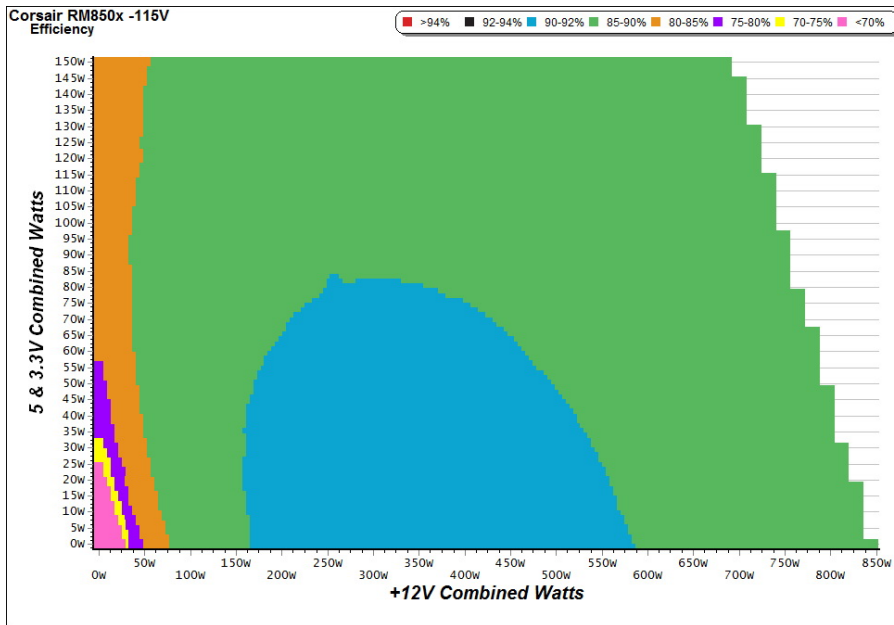

INFO

This graph depicts the PSU's efficiency throughout its entire operational range. For the generation of the efficiency and noise graphs we set our loaders to auto mode through our custom-made software before trying thousands of possible load combinations

NOISE GRAPH

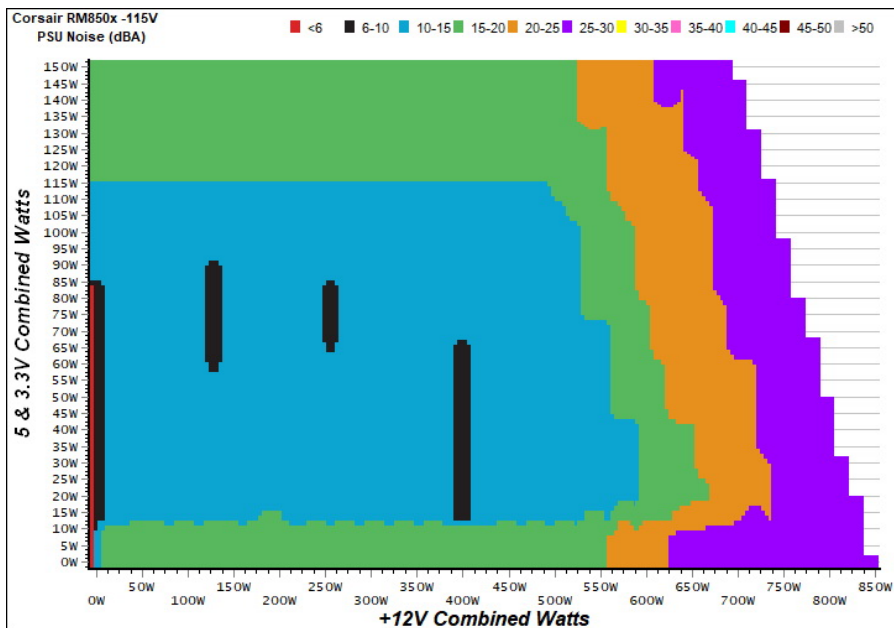

INFO

The PSU's noise in its entire operational range and under 30-32 °C ambient is depicted in this graph. The X axis represents the load on the +12V rail(s) while the Y axis is the load on the minor rails

All data and graphs included in this test report can be used by any individual on the following conditions:

- > It should be mentioned that the test results are provided by Cybenetics
- > The link to the original test results document should be provided in any case

Anex

Corsair RM850x


5VSB EFFICIENCY -115V (ERP LOT 3/6 & CEC)

| Test # | 5VSB | DC/AC (Watts) | Efficiency | PF/AC Volts |
|--------|--------|---------------|------------|-------------|
| 1 | 0.041A | 0.210 | 69.767% | 0.030 |
| | 5.077V | 0.301 | | 115.06V |
| 2 | 0.087A | 0.441 | 76.034% | 0.057 |
| | 5.075V | 0.580 | | 115.06V |
| 3 | 0.532A | 2.693 | 81.879% | 0.246 |
| | 5.064V | 3.289 | | 115.05V |
| 4 | 3.001A | 15.015 | 80.782% | 0.445 |
| | 5.003V | 18.587 | | 115.04V |

5VSB EFFICIENCY -230V (ERP LOT 3/6 & CEC)

| Test # | 5VSB | DC/AC (Watts) | Efficiency | PF/AC Volts |
|--------|--------|---------------|------------|-------------|
| 1 | 0.042A | 0.210 | 60.694% | 0.011 |
| | 5.076V | 0.346 | | 230.11V |
| 2 | 0.087A | 0.441 | 69.778% | 0.019 |
| | 5.075V | 0.632 | | 230.13V |
| 3 | 0.532A | 2.692 | 79.387% | 0.097 |
| | 5.064V | 3.391 | | 230.13V |
| 4 | 3.001A | 15.015 | 80.553% | 0.316 |
| | 5.003V | 18.640 | | 230.12V |

VAMPIRE POWER -115V

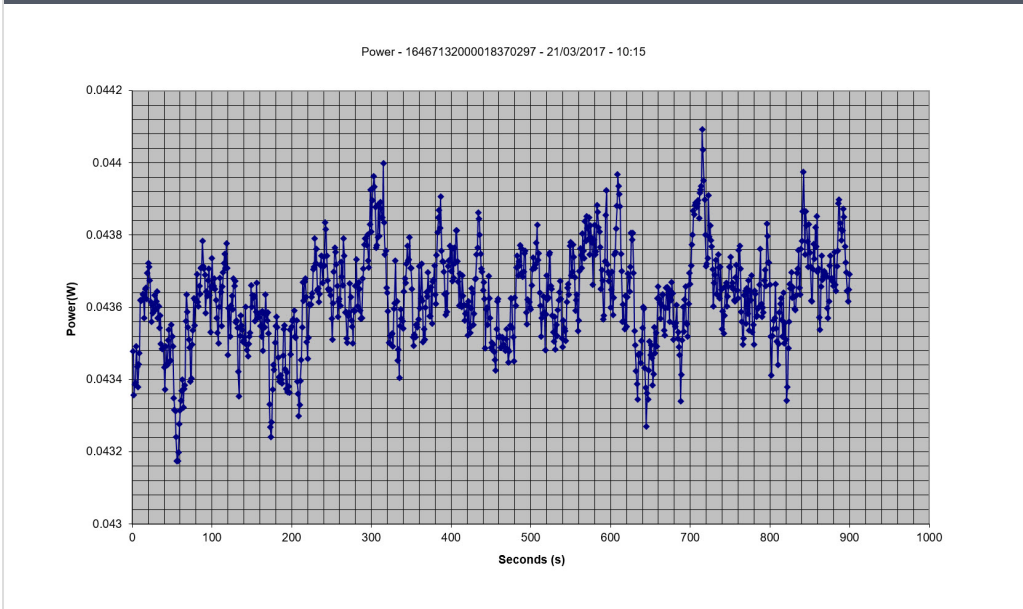

INFO


This graph is generated by the PPA Standby Power Analysis software which takes full control of the power analyzer during the whole procedure. This application features all of the EN50564 & IEC62301 test limits for standby power software testing

All data and graphs included in this test report can be used by any individual on the following conditions:

- > It should be mentioned that the test results are provided by Cybenetics
- > The link to the original test results document should be provided in any case

EFFICIENCY UNDER HIGH AMBIENT TEMPERATURE

Efficiency: Corsair RM850x
Ambient: 36°C - 49°C (96.8°F - 120.2°F)

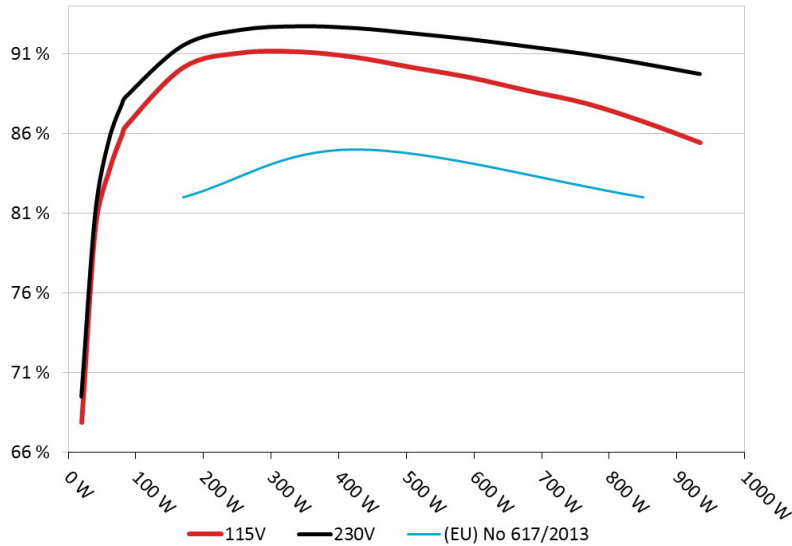


INFO

The PSU's efficiency under high ambient temperatures with 115V and 230V input. For this graph the results of the 10-110% load regulation table are used

5VSB EFFICIENCY

5VSB Efficiency: Corsair RM850x
Ambient: 34°C - 36°C (93.2°F - 96.8°F)

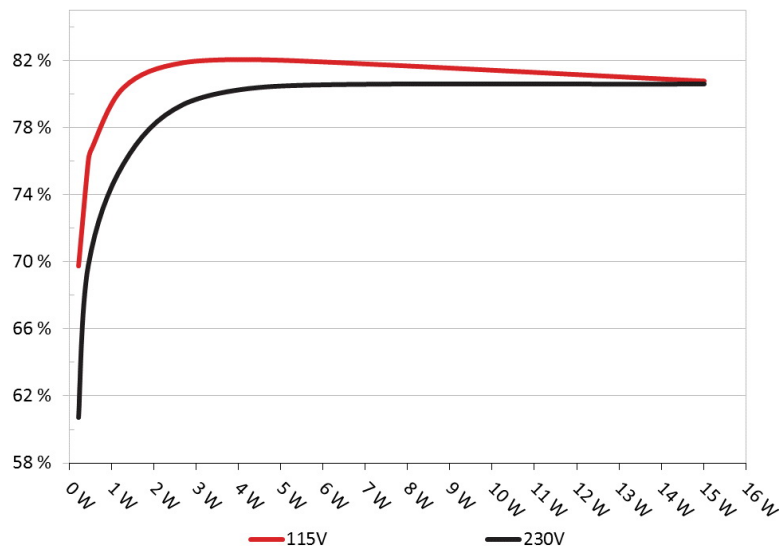

INFO

This graph depicts the efficiency levels of the 5VSB rail with 115V and 230V input

All data and graphs included in this test report can be used by any individual on the following conditions:

- > It should be mentioned that the test results are provided by Cybenetics
- > The link to the original test results document should be provided in any case

10-110% LOAD TESTS

| Test # | 12V | 5V | 3.3V | 5VSB | DC/AC (Watts) | Efficiency | Fan Speed (RPM) | PSU Noise (dB[A]) | Temps (In/Out) | PF/AC Volts |
|--------|---------|---------|---------|--------|---------------|------------|-----------------|-------------------|----------------|-------------|
| 1 | 5.242A | 1.985A | 1.995A | 0.996A | 84.812 | 86.449% | 0 | <6.0 | 45.31°C | 0.969 |
| | 12.062V | 5.034V | 3.307V | 5.013V | 98.106 | | | | 39.46°C | 115.07V |
| 2 | 11.523A | 2.979A | 2.994A | 1.196A | 169.695 | 90.130% | 0 | <6.0 | 47.15°C | 0.989 |
| | 12.048V | 5.031V | 3.303V | 5.008V | 188.279 | | | | 41.10°C | 115.08V |
| 3 | 18.180A | 3.483A | 3.513A | 1.398A | 254.911 | 91.046% | 0 | <6.0 | 47.64°C | 0.994 |
| | 12.036V | 5.028V | 3.300V | 5.001V | 279.980 | | | | 41.33°C | 115.07V |
| 4 | 24.835A | 3.980A | 4.000A | 1.601A | 339.755 | 91.119% | 0 | <6.0 | 48.63°C | 0.996 |
| | 12.022V | 5.025V | 3.298V | 4.995V | 372.868 | | | | 41.99°C | 115.07V |
| 5 | 31.164A | 4.977A | 5.004A | 1.802A | 424.649 | 90.768% | 0 | <6.0 | 50.18°C | 0.996 |
| | 12.007V | 5.021V | 3.294V | 4.989V | 467.840 | | | | 43.39°C | 115.07V |
| 6 | 37.509A | 5.977A | 6.014A | 2.006A | 509.665 | 90.127% | 633 | 10.9 | 45.52°C | 0.997 |
| | 11.994V | 5.018V | 3.291V | 4.984V | 565.495 | | | | 61.47°C | 115.07V |
| 7 | 43.865A | 6.985A | 7.024A | 2.208A | 594.661 | 89.499% | 658 | 12.7 | 44.35°C | 0.997 |
| | 11.981V | 5.015V | 3.288V | 4.977V | 664.436 | | | | 60.76°C | 115.06V |
| 8 | 50.233A | 7.986A | 8.038A | 2.410A | 679.579 | 88.675% | 843 | 20.4 | 44.64°C | 0.997 |
| | 11.968V | 5.010V | 3.284V | 4.972V | 766.368 | | | | 61.45°C | 115.06V |
| 9 | 57.055A | 8.485A | 8.564A | 2.411A | 764.601 | 87.892% | 943 | 24.5 | 45.29°C | 0.997 |
| | 11.954V | 5.007V | 3.281V | 4.970V | 869.931 | | | | 62.97°C | 115.06V |
| 10 | 63.636A | 9.000A | 9.059A | 3.026A | 849.468 | 86.751% | 1071 | 28.0 | 46.95°C | 0.997 |
| | 11.939V | 5.004V | 3.278V | 4.953V | 979.202 | | | | 66.21°C | 115.05V |
| 11 | 70.843A | 9.007A | 9.065A | 3.030A | 934.401 | 85.420% | 1282 | 34.4 | 48.97°C | 0.997 |
| | 11.923V | 5.001V | 3.276V | 4.950V | 1093.889 | | | | 68.80°C | 115.05V |
| CL1 | 0.099A | 18.027A | 18.003A | 0.003A | 150.752 | 82.474% | 811 | 19.1 | 46.13°C | 0.989 |
| | 12.033V | 5.012V | 3.288V | 5.068V | 182.788 | | | | 59.02°C | 115.09V |
| CL2 | 70.794A | 1.003A | 1.003A | 1.001A | 858.821 | 87.104% | 1103 | 28.7 | 47.20°C | 0.997 |
| | 11.943V | 5.015V | 3.289V | 4.995V | 985.976 | | | | 65.50°C | 115.06V |

All data and graphs included in this test report can be used by any individual on the following conditions:

- > It should be mentioned that the test results are provided by Cybenetics
- > The link to the original test results document should be provided in any case

20-80W LOAD TESTS

| Test # | 12V | 5V | 3.3V | 5VSB | DC/AC (Watts) | Efficiency | Fan Speed (RPM) | PSU Noise (dB[A]) | PF/AC Volts |
|--------|---------|--------|--------|--------|---------------|------------|-----------------|-------------------|-------------|
| 1 | 1.209A | 0.491A | 0.482A | 0.197A | 19.662 | 67.884% | 0 | <6.0 | 0.843 |
| | 12.077V | 5.038V | 3.310V | 5.033V | 28.964 | | | | 115.07V |
| 2 | 2.447A | 0.990A | 0.996A | 0.395A | 39.810 | 80.078% | 0 | <6.0 | 0.936 |
| | 12.073V | 5.036V | 3.309V | 5.028V | 49.714 | | | | 115.07V |
| 3 | 3.682A | 1.478A | 1.512A | 0.596A | 59.874 | 83.612% | 0 | <6.0 | 0.954 |
| | 12.069V | 5.035V | 3.307V | 5.023V | 71.609 | | | | 115.07V |
| 4 | 4.908A | 1.985A | 1.993A | 0.797A | 79.794 | 85.974% | 0 | <6.0 | 0.966 |
| | 12.064V | 5.034V | 3.307V | 5.019V | 92.812 | | | | 115.07V |

RIPPLE MEASUREMENTS

| Test | 12V | 5V | 3.3V | 5VSB | Pass/Fail |
|-------------|---------|--------|---------|--------|-----------|
| 10% Load | 4.8 mV | 5.4 mV | 6.7 mV | 3.3 mV | Pass |
| 20% Load | 5.2 mV | 5.1 mV | 6.3 mV | 3.5 mV | Pass |
| 30% Load | 5.9 mV | 5.2 mV | 6.4 mV | 3.8 mV | Pass |
| 40% Load | 6.4 mV | 5.4 mV | 6.7 mV | 4.8 mV | Pass |
| 50% Load | 6.3 mV | 5.7 mV | 7.3 mV | 4.7 mV | Pass |
| 60% Load | 7.2 mV | 5.8 mV | 8.3 mV | 5.7 mV | Pass |
| 70% Load | 7.7 mV | 5.8 mV | 8.8 mV | 6.2 mV | Pass |
| 80% Load | 8.0 mV | 5.7 mV | 9.7 mV | 6.6 mV | Pass |
| 90% Load | 8.6 mV | 6.0 mV | 9.5 mV | 7.1 mV | Pass |
| 100% Load | 10.7 mV | 5.9 mV | 10.0 mV | 8.1 mV | Pass |
| 110% Load | 13.9 mV | 6.4 mV | 9.8 mV | 9.6 mV | Pass |
| Crossload 1 | 7.3 mV | 5.9 mV | 8.0 mV | 5.8 mV | Pass |
| Crossload 2 | 11.0 mV | 7.0 mV | 8.7 mV | 8.5 mV | Pass |

All data and graphs included in this test report can be used by any individual on the following conditions:

- > It should be mentioned that the test results are provided by Cybenetics
- > The link to the original test results document should be provided in any case

Anex

Corsair RM850x

| HOLD-UP TIME & POWER OK SIGNAL (230V) | |
|---------------------------------------|------|
| Hold-Up Time (ms) | 29.4 |
| AC Loss to PWR_OK Hold Up Time (ms) | 21.8 |
| PWR_OK Inactive to DC Loss Delay (ms) | 7.6 |



CERTIFICATIONS



All data and graphs included in this test report can be used by any individual on the following conditions:

- > It should be mentioned that the test results are provided by Cybenetics
- > The link to the original test results document should be provided in any case