

Lab ID#: CR19650015
Receipt Date: Mar 21, 2019
Test Date: May 4, 2019

Report:

Report Date: Aug 4, 2019

DUT INFORMATION

Brand	Corsair
Manufacturer (OEM)	Channel Well Technology
Series	RM
Model Number	
Serial Number	19027120000038920016
DUT Notes	CP-9020194

DUT SPECIFICATIONS

Rated Voltage (Vrms)	100-240
Rated Current (Arms)	10-5
Rated Frequency (Hz)	47-63
Rated Power (W)	650
Type	ATX12V
Cooling	140mm Rifle Bearing Fan (HA1425M12F-Z)
Semi-Passive Operation	✓
Cable Design	Fully Modular

TEST EQUIPMENT

Electronic Loads	Chroma 6314A x2 63123A x6 63102A 63101A	Chroma 63601-5 x4 Chroma 63600-2 x2 63640-80-80 x20 63610-80-20 x2
AC Sources	Chroma 6530, Chroma 61604, Keysight AC6804B	
Power Analyzers	N4L PPA1530 x2, N4L PPA5530	
Oscilloscopes	Picoscope 4444 & 3424, Keysight DSOX3024A, Rigol DS2072A	
Voltmeter	Keithley 2015 THD 6.5 Digit	
Sound Analyzer	Bruel & Kjaer 2250-L G4	
Microphone	Bruel & Kjaer Type 4955-A, Bruel & Kjaer Type 4189	
Data Loggers	Picoscope TC-08 x2, Labjack U3-HV x2	

All data and graphs included in this test report can be used by any individual on the following conditions:

- > It should be mentioned that the test results are provided by Cybenetics
- > The link to the original test results document should be provided in any case

PAGE 1/13

RESULTS

Temperature Range (°C /°F)	30-32 / 86-89.6 (+-2°C / +- 3.6°F)
ErP Lot 3/6 Ready	✓
(EU) No 617/2013 Compliance	✓

115V

Average Efficiency	88.782%
Efficiency With 10W (≤500W) or 2% (>500W)	75.342
Average Efficiency 5VSB	77.636%
Standby Power Consumption (W)	0.0371971
Average PF	0.991
Avg Noise Output	19.31 dB(A)
Efficiency Rating (ETA)	GOLD
Noise Rating (LAMBDA)	A+

230V

Average Efficiency	90.816%
Average Efficiency 5VSB	77.116%
Standby Power Consumption (W)	0.0636784
Average PF	0.961
Avg Noise Output	19.50 dB(A)
Efficiency Rating (ETA)	GOLD
Noise Rating (LAMBDA)	A+

POWER SPECIFICATIONS

Rail		3.3V	5V	12V	5VSB	-12V
Max. Power	Amps	20	20	54	3	0.3
	Watts	130		648	15	3.6
Total Max. Power (W)		650				

All data and graphs included in this test report can be used by any individual on the following conditions:

- › It should be mentioned that the test results are provided by Cybenetics
- › The link to the original test results document should be provided in any case

PAGE 2/13

CABLES AND CONNECTORS

Modular Cables

Description	Cable Count	Connector Count (Total)	Gauge	In Cable Capacitors
ATX connector 20+4 pin (610mm)	1	1	18-20AWG	No
4+4 pin EPS12V (650mm)	2	2	18AWG	No
6+2 pin PCIe (600mm+150mm)	2	4	16-18AWG	No
SATA (500mm+100mm+100mm)	2	6	18AWG	No
4 pin Molex (450mm+100mm+100mm+100mm)	1	4	18AWG	No
AC Power Cord (1420mm) - C13 coupler	1	1	16AWG	-

All data and graphs included in this test report can be used by any individual on the following conditions:


- › It should be mentioned that the test results are provided by Cybenetics
- › The link to the original test results document should be provided in any case

PAGE 3/13

EFFICIENCY UNDER HIGH AMBIENT TEMPERATURE

Efficiency: Corsair RM650

Ambient: 37°C - 47°C (98.6°F - 116.6°F)

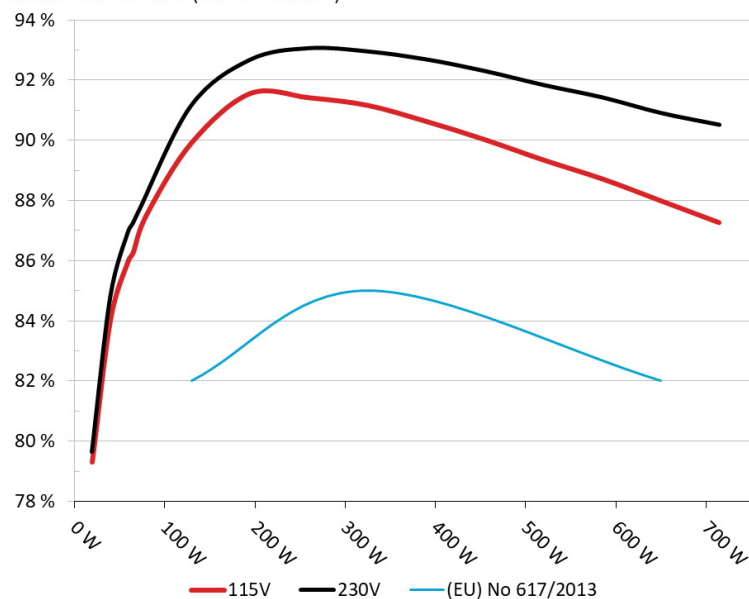


INFO

The PSU's efficiency under high ambient temperatures with 115V and 230V input. For this graph the results of the 10-110% load regulation table are used

5VSB EFFICIENCY

5VSB Efficiency: Corsair RM650

Ambient: 34°C - 36°C (93.2°F - 96.8°F)

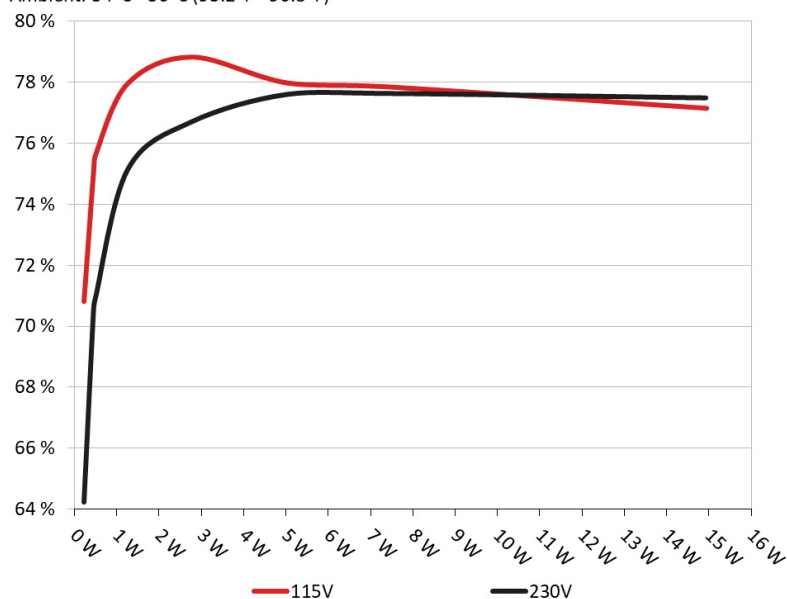

INFO

This graph depicts the efficiency levels of the 5VSB rail with 115V and 230V input

All data and graphs included in this test report can be used by any individual on the following conditions:

- > It should be mentioned that the test results are provided by Cybenetics
- > The link to the original test results document should be provided in any case

5VSB EFFICIENCY -115V (ERP LOT 3/6 & CEC)

Test #	5VSB	DC/AC (Watts)	Efficiency	PF/AC Volts
1	0.045A	0.228	70.807%	0.032
	5.055V	0.322		115.13V
2	0.090A	0.455	75.083%	0.058
	5.054V	0.606		115.13V
3	0.550A	2.774	78.829%	0.254
	5.043V	3.519		115.11V
4	1.000A	5.032	77.979%	0.343
	5.031V	6.453		115.11V
5	1.500A	7.528	77.841%	0.393
	5.018V	9.671		115.12V
6	3.000A	14.939	77.148%	0.457
	4.980V	19.364		115.12V

5VSB EFFICIENCY -230V (ERP LOT 3/6 & CEC)

Test #	5VSB	DC/AC (Watts)	Efficiency	PF/AC Volts
1	0.045A	0.228	64.225%	0.010
	5.054V	0.355		230.27V
2	0.090A	0.455	70.543%	0.019
	5.053V	0.645		230.26V
3	0.550A	2.774	76.693%	0.099
	5.042V	3.617		230.29V
4	1.000A	5.031	77.591%	0.163
	5.030V	6.484		230.29V
5	1.500A	7.526	77.620%	0.218
	5.017V	9.696		230.28V
6	3.000A	14.932	77.476%	0.315
	4.978V	19.273		230.27V

All data and graphs included in this test report can be used by any individual on the following conditions:

- > It should be mentioned that the test results are provided by Cybenetics
- > The link to the original test results document should be provided in any case


115V

All data and graphs included in this test report can be used by any individual on the following conditions:

- › It should be mentioned that the test results are provided by Cybenetics
- › The link to the original test results document should be provided in any case

PAGE 6/13


EFFICIENCY GRAPH 115V

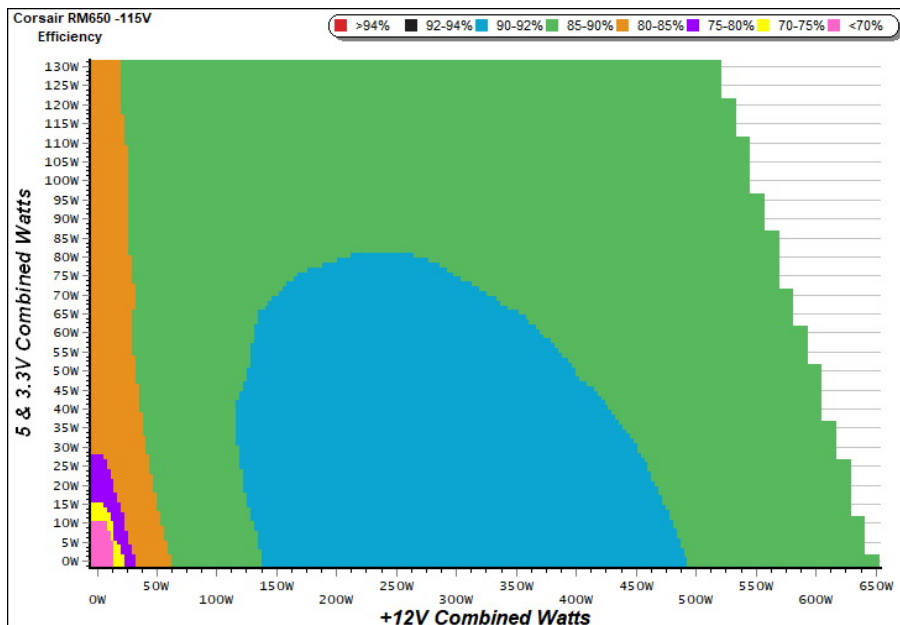

INFO

This graph depicts the PSU's efficiency throughout its entire operational range. For the generation of the efficiency and noise graphs we set our loaders to auto mode through our custom-made software before trying thousands of possible load combinations

NOISE GRAPH 115V

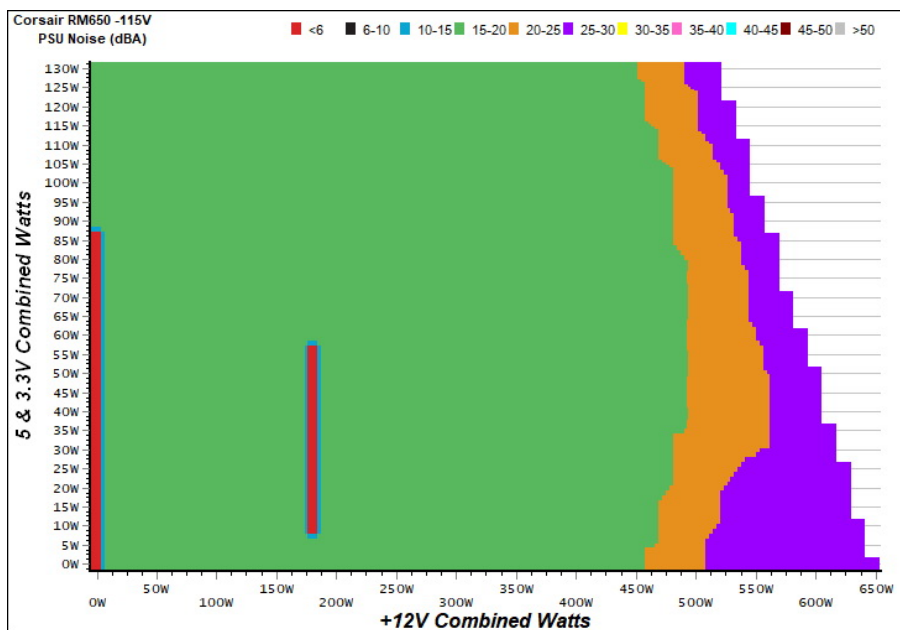

INFO


The PSU's noise in its entire operational range and under 30-32 °C (+2 °C) ambient is depicted in this graph. The X axis represents the load on the +12V rail(s) while the Y axis is the load on the minor rails

All data and graphs included in this test report can be used by any individual on the following conditions:

- > It should be mentioned that the test results are provided by Cybenetics
- > The link to the original test results document should be provided in any case

VAMPIRE POWER -115V

Power - 19027120000038920016 - 01/04/2019 - 16:44

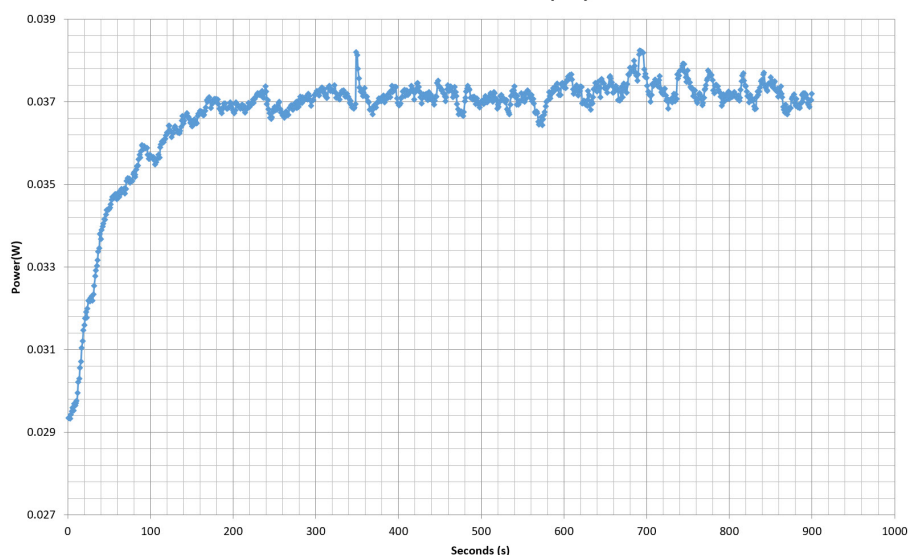

INFO

This graph is generated by the PPA Standby Power Analysis software which takes full control of the power analyzer during the whole procedure. This application features all of the EN50564 & IEC62301 test limits for standby power software testing

All data and graphs included in this test report can be used by any individual on the following conditions:

- › It should be mentioned that the test results are provided by Cybenetics
- › The link to the original test results document should be provided in any case

PAGE 8/13

COMMISSION REGULATION (EU) NO 617/2013 TESTING 115V

All data and graphs included in this test report can be used by any individual on the following conditions:

- › It should be mentioned that the test results are provided by Cybenetics
- › The link to the original test results document should be provided in any case

PAGE 9/13


230V

All data and graphs included in this test report can be used by any individual on the following conditions:

- › It should be mentioned that the test results are provided by Cybenetics
- › The link to the original test results document should be provided in any case

PAGE 10/13


EFFICIENCY GRAPH 230V

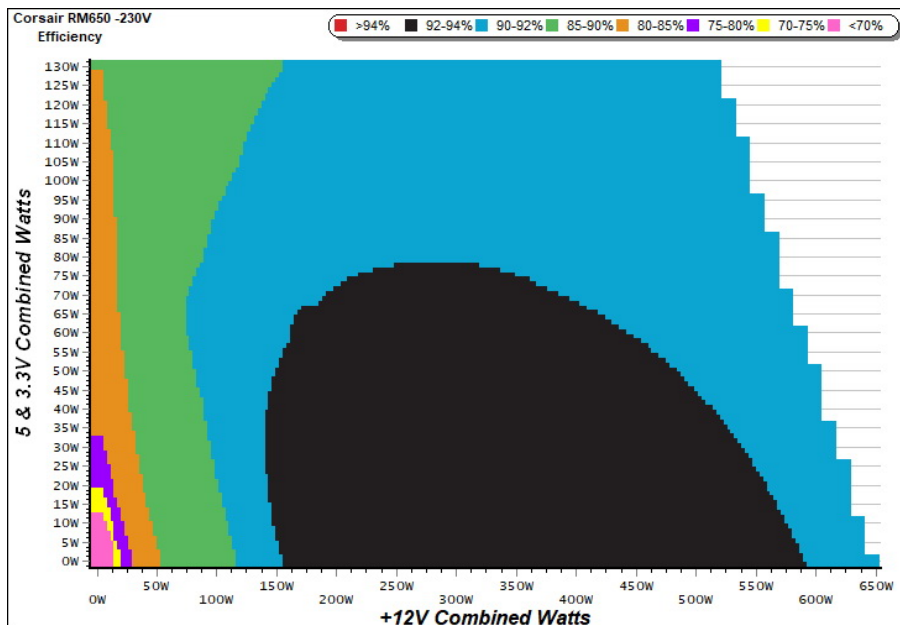

INFO

This graph depicts the PSU's efficiency throughout its entire operational range. For the generation of the efficiency and noise graphs we set our loaders to auto mode through our custom-made software before trying thousands of possible load combinations

NOISE GRAPH 230V

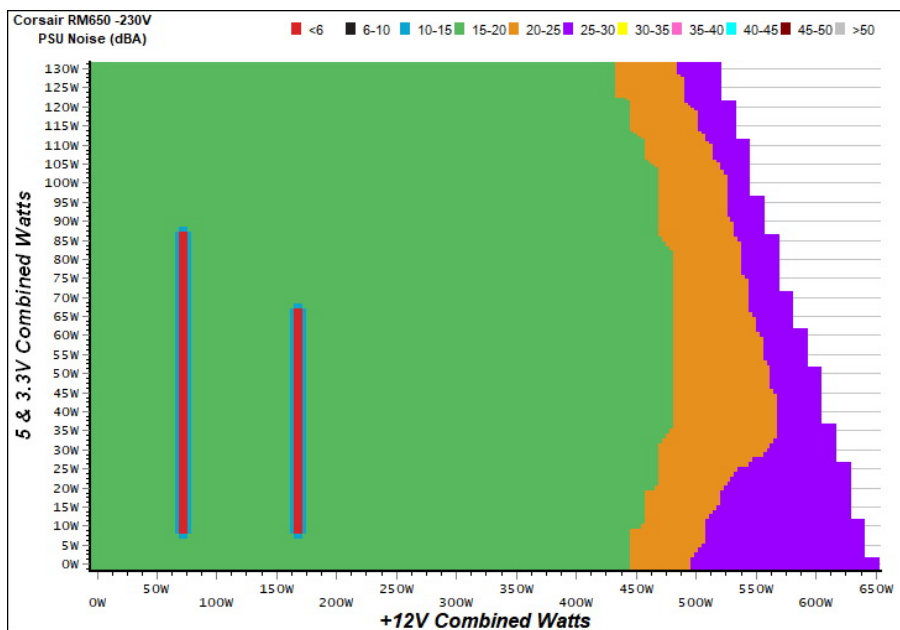

INFO


The PSU's noise in its entire operational range and under 30-32 °C (+2 °C) ambient is depicted in this graph. The X axis represents the load on the +12V rail(s) while the Y axis is the load on the minor rails

All data and graphs included in this test report can be used by any individual on the following conditions:

- > It should be mentioned that the test results are provided by Cybenetics
- > The link to the original test results document should be provided in any case

VAMPIRE POWER -230V

Power - 19027120000038920016 - 01/04/2019 - 16:44

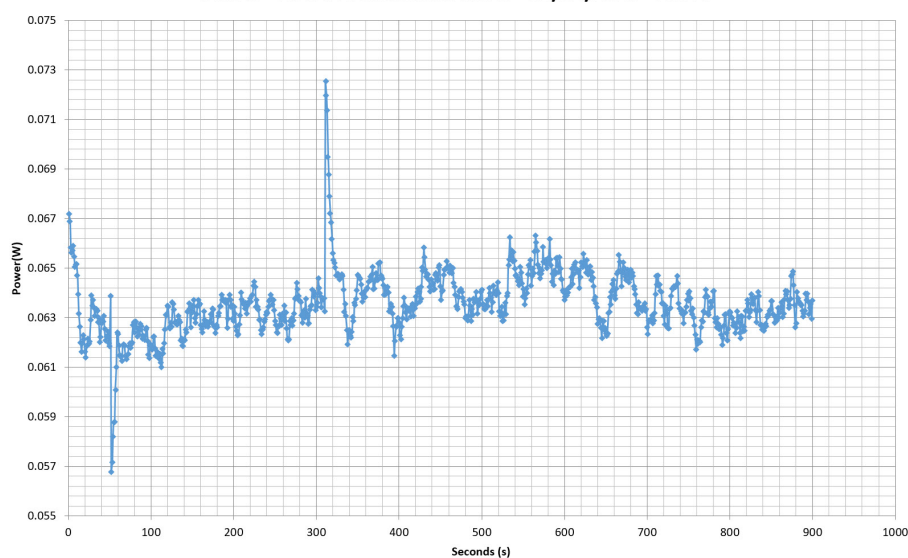

INFO

This graph is generated by the PPA Standby Power Analysis software which takes full control of the power analyzer during the whole procedure. This application features all of the EN50564 & IEC62301 test limits for standby power software testing

All data and graphs included in this test report can be used by any individual on the following conditions:

- › It should be mentioned that the test results are provided by Cybenetics
- › The link to the original test results document should be provided in any case

PAGE 12/13

COMMISSION REGULATION (EU) NO 617/2013 TESTING 230V

All data and graphs included in this test report can be used by any individual on the following conditions:

- › It should be mentioned that the test results are provided by Cybenetics
- › The link to the original test results document should be provided in any case

PAGE 13/13




Top side

MODEL / MODELO / 型号 / 型號 / 모델: RPS0118 POWER SUPPLY / FUENTE DE ALIMENTACIÓN / 전원 공급 장치					
PART NUMBER: CP-9020194/75-003892					
交流輸入 AC INPUT	100V - 240V • 10A - 5A • 47Hz - 63Hz				
直流輸出 DC OUTPUT	+5V	+3.3V	+12V	-12V	+5Vsb
最大電流 MAX LOAD	20A	20A	54A	0.3A	3A
最大瓦特數 MAX POWER	130W	648W	3.6W	15W	
TOTAL POWER: 650W POWER TOTAL / 總功率 / 총출력					

Power specifications label

CERTIFICATIONS 115V




Aristeidis Bitziopoulos
Lab Director

CERTIFICATIONS 230V



All data and graphs included in this test report can be used by any individual on the following conditions:

- > It should be mentioned that the test results are provided by Cybenetics
- > The link to the original test results document should be provided in any case