

Anex

Seasonic Focus GX-850 ATX3.0

Lab ID#: SS85002331
 Receipt Date: Jan 2, 2024
 Test Date: Jan 17, 2024

Report: 24PS2331A
 Report Date: Jan 23, 2024

| DUT INFORMATION | |
|--------------------|------------|
| Brand | Seasonic |
| Manufacturer (OEM) | Seasonic |
| Series | Focus GX |
| Model Number | SSR-850FX3 |
| Serial Number | |
| DUT Notes | |

| DUT SPECIFICATIONS | |
|------------------------|---|
| Rated Voltage (Vrms) | 100-240 |
| Rated Current (Arms) | 11-5.5 |
| Rated Frequency (Hz) | 50-60 |
| Rated Power (W) | 850 |
| Type | ATX12V |
| Cooling | 135mm Fluid Dynamic Bearing Fan (HA13525H12F-Z) |
| Semi-Passive Operation | ✓ (selectable) |
| Cable Design | Fully Modular |

| TEST EQUIPMENT | |
|-----------------------|---|
| Electronic Loads | Chroma 63601-5 x2 Chroma 63600-2 63640-80-80 x10 63610-80-20 |
| AC Sources | Chroma 6530, APM SP300VAC4000W-P |
| Power Analyzers | RS HMC8015, N4L PPA1530, N4L PPA5530 |
| Oscilloscopes | Picoscope 4444, Rigol DS7014, Siglent SDS2104X PLUS |
| Sound Analyzer | Bruel & Kjaer 2270 G4 |
| Microphone | Bruel & Kjaer Type 4955-A |
| Temperature Logger | Picoscope TC-08 |
| Tachometer | UNI-T UT372 |
| Multimeters | Keysight 34465A, Keithley 2015 - THD |
| UPS | FSP Champ Tower 3kVA, CyberPower OLS3000E 3kVA |
| Isolation Transformer | 4kVA |

All data and graphs included in this test report can be used by any individual on the following conditions:

- > It should be mentioned that the test results are provided by Cybenetics
- > The link to the original test results document should be provided in any case

Anex

Seasonic Focus GX-850 ATX3.0

RESULTS

| | |
|--|-----------------|
| Temperature Range (°C /°F) | 30-32 / 86-89.6 |
| ErP Lot 3/6 Ready | ✓ |
| (EU) No 617/2013 Compliance | ✓ |
| ALPM (Alternative Low Power Mode) compatible | ✓ |
| ATX v3.0 PSU Power Excursion | ✓ |

115V

| | |
|---|-------------|
| Average Efficiency | 88.845% |
| Efficiency With 10W (≤500W) or 2% (>500W) | 71.808 |
| Average Efficiency 5VSB | 80.848% |
| Standby Power Consumption (W) | 0.0726000 |
| Average PF | 0.984 |
| Avg Noise Output | 30.73 dB(A) |
| Efficiency Rating (ETA) | GOLD |
| Noise Rating (LAMBDA) | Standard++ |

230V

| | |
|-------------------------------|-------------|
| Average Efficiency | 90.962% |
| Average Efficiency 5VSB | 79.360% |
| Standby Power Consumption (W) | 0.1650000 |
| Average PF | 0.952 |
| Avg Noise Output | 30.82 dB(A) |
| Efficiency Rating (ETA) | GOLD |
| Noise Rating (LAMBDA) | Standard++ |

POWER SPECIFICATIONS

| Rail | | 3.3V | 5V | 12V | 5VSB | -12V |
|----------------------|-------|------|----|-----|------|------|
| Max. Power | Amps | 20 | 20 | 70 | 3 | 0.3 |
| | Watts | 100 | | 840 | 15 | 3.6 |
| Total Max. Power (W) | | 850 | | | | |

HOLD-UP TIME & POWER OK SIGNAL (230V)

| | |
|---------------------------------------|------|
| Hold-Up Time (ms) | 19.8 |
| AC Loss to PWR_OK Hold Up Time (ms) | 15.6 |
| PWR_OK Inactive to DC Loss Delay (ms) | 4.2 |

All data and graphs included in this test report can be used by any individual on the following conditions:

- > It should be mentioned that the test results are provided by Cybenetics
- > The link to the original test results document should be provided in any case

CABLES AND CONNECTORS

Modular Cables

| Description | Cable Count | Connector Count (Total) | Gauge | In Cable Capacitors |
|---------------------------------|-------------|-------------------------|----------|---------------------|
| ATX connector 20+4 pin (620mm) | 1 | 1 | 16-18AWG | No |
| 4+4 pin EPS12V (710mm) | 2 | 2 | 16AWG | No |
| 6+2 pin PCIe (750mm) | 3 | 3 | 16-18AWG | No |
| 12+4 pin PCIe (760mm) (600W) | 1 | 1 | 16-28AWG | No |
| SATA (510mm+150mm+150mm+150mm) | 2 | 8 | 18AWG | No |
| SATA 3.3 (410mm+150mm) | 1 | 2 | 18AWG | No |
| 4-pin Molex (450mm+125mm+125mm) | 1 | 3 | 18AWG | No |

All data and graphs included in this test report can be used by any individual on the following conditions:


- > It should be mentioned that the test results are provided by Cybenetics
- > The link to the original test results document should be provided in any case

PAGE 3/16

EFFICIENCY UNDER HIGH AMBIENT TEMPERATURE

Efficiency: Seasonic Focus GX-850 ATX3.0

Ambient: 37°C - 47°C (98.6°F - 116.6°F)

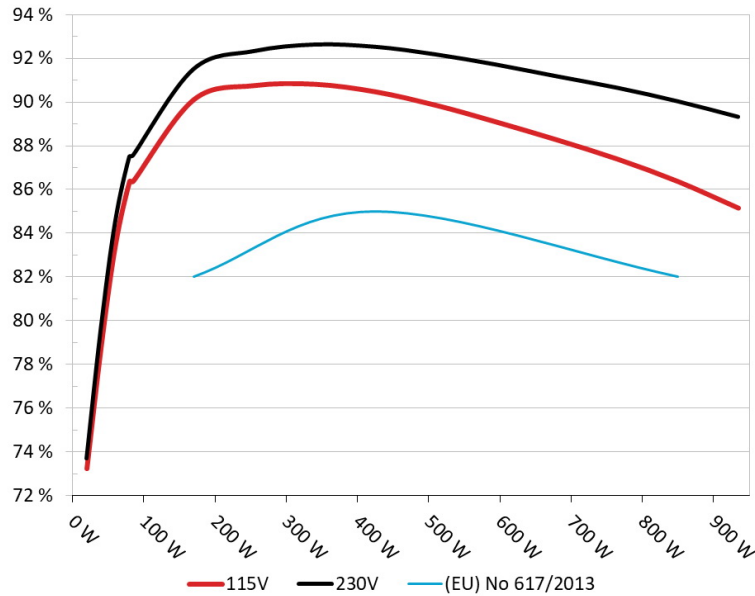


INFO

The PSU's efficiency under high ambient temperatures with 115V and 230V input. For this graph the results of the 10-110% load regulation table are used

5VSB EFFICIENCY

5VSB Efficiency: Seasonic Focus GX-850 ATX3.0

Ambient: 34°C - 36°C (93.2°F - 96.8°F)

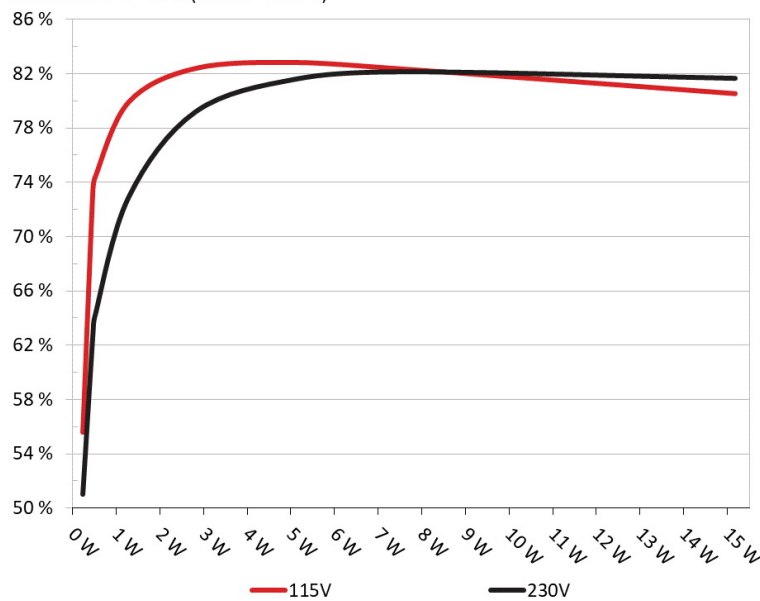

INFO

This graph depicts the efficiency levels of the 5VSB rail with 115V and 230V input

All data and graphs included in this test report can be used by any individual on the following conditions:

- > It should be mentioned that the test results are provided by Cybenetics
- > The link to the original test results document should be provided in any case

5VSB EFFICIENCY -115V (ERP LOT 3/6 & CEC)

| Test # | 5VSB | DC/AC (Watts) | Efficiency | PF/AC Volts |
|--------|--------|---------------|------------|-------------|
| 1 | 0.045A | 0.231W | 55.116% | 0.029 |
| | 5.134V | 0.287W | | 115.17V |
| 2 | 0.09A | 0.462W | 72.995% | 0.063 |
| | 5.132V | 0.633W | | 115.17V |
| 3 | 0.55A | 2.817W | 81.902% | 0.265 |
| | 5.121V | 3.439W | | 115.17V |
| 4 | 1A | 5.111W | 82.33% | 0.364 |
| | 5.11V | 6.208W | | 115.17V |
| 5 | 1.5A | 7.647W | 81.835% | 0.415 |
| | 5.097V | 9.345W | | 115.17V |
| 6 | 3.001A | 15.179W | 80.041% | 0.483 |
| | 5.059V | 18.966W | | 115.16V |

5VSB EFFICIENCY -230V (ERP LOT 3/6 & CEC)

| Test # | 5VSB | DC/AC (Watts) | Efficiency | PF/AC Volts |
|--------|--------|---------------|------------|-------------|
| 1 | 0.045A | 0.231W | 50.495% | 0.014 |
| | 5.134V | 0.458W | | 230.4V |
| 2 | 0.09A | 0.462W | 62.315% | 0.022 |
| | 5.132V | 0.742W | | 230.4V |
| 3 | 0.55A | 2.817W | 78.709% | 0.102 |
| | 5.121V | 3.58W | | 230.41V |
| 4 | 1A | 5.111W | 81.111% | 0.168 |
| | 5.11V | 6.303W | | 230.4V |
| 5 | 1.5A | 7.648W | 81.65% | 0.227 |
| | 5.097V | 9.367W | | 230.4V |
| 6 | 3.001A | 15.183W | 81.168% | 0.332 |
| | 5.06V | 18.71W | | 230.4V |

All data and graphs included in this test report can be used by any individual on the following conditions:

- > It should be mentioned that the test results are provided by Cybenetics
- > The link to the original test results document should be provided in any case

Anex

Seasonic Focus GX-850 ATX3.0


115V

All data and graphs included in this test report can be used by any individual on the following conditions:

- > It should be mentioned that the test results are provided by Cybenetics
- > The link to the original test results document should be provided in any case

PAGE 6/16


EFFICIENCY GRAPH 115V

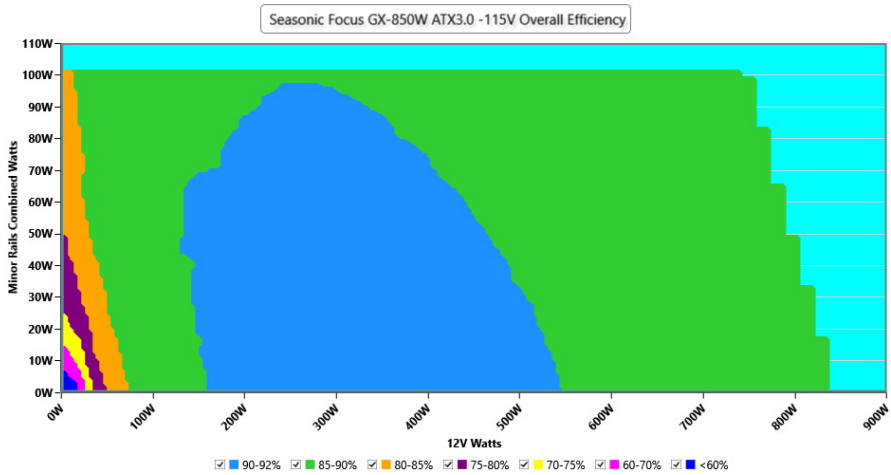

INFO

This graph depicts the PSU's efficiency throughout its entire operational range. For the generation of the efficiency and noise graphs we set our loaders to auto mode through our custom-made software before trying thousands of possible load combinations

NOISE GRAPH 115V

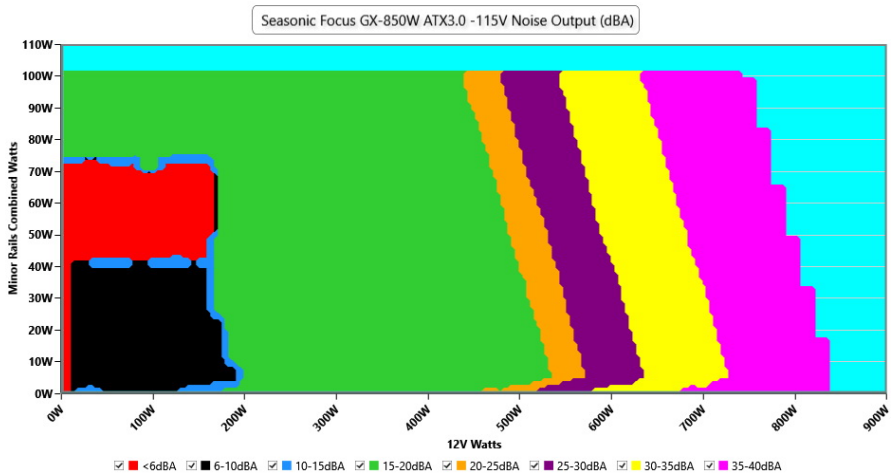

INFO

The PSU's noise in its entire operational range and under 30-32 °C ambient is depicted in this graph. The X axis represents the load on the +12V rail(s) while the Y axis is the load on the minor rails

All data and graphs included in this test report can be used by any individual on the following conditions:

- > It should be mentioned that the test results are provided by Cybenetics
- > The link to the original test results document should be provided in any case

VAMPIRE POWER -115V

Detailed Results

| | Average | Min | Limit Min | Max | Limit Max | Result |
|--------------------|----------|----------|-----------|----------|-----------|--------|
| Mains Voltage RMS: | 115.15 V | 115.13 V | 113.85 V | 115.17 V | 116.15 V | PASS |
| Mains Frequency: | 60.00 Hz | 59.91 Hz | 59.40 Hz | 60.01 Hz | 60.60 Hz | PASS |
| Mains Voltage CF: | 1.415 | 1.415 | 1.340 | 1.416 | 1.490 | PASS |
| Mains Voltage THD: | 0.13 % | 0.11 % | N/A | 0.14 % | 2.00 % | PASS |
| Real Power: | 0.073 W | 0.065 W | N/A | 0.082 W | N/A | N/A |
| Apparent Power: | 9.960 W | 9.956 W | N/A | 9.963 W | N/A | N/A |
| Power Factor: | 0.007 | N/A | N/A | N/A | N/A | N/A |

INFO

This graph is generated by the PPA Standby Power Analysis software which takes full control of the power analyzer during the whole procedure. This application features all of the EN50564 & IEC62301 test limits for standby power software testing

All data and graphs included in this test report can be used by any individual on the following conditions:

- > It should be mentioned that the test results are provided by Cybenetics
- > The link to the original test results document should be provided in any case

10-110% LOAD TESTS 115V

| Test | 12V | 5V | 3.3V | 5VSB | DC/AC (Watts) | Efficiency | Fan Speed (RPM) | PSU Noise (dB[A]) | Temps (In/Out) | PF/AC Volts |
|------|---------|---------|---------|--------|------------------|------------|-----------------------|----------------------|-------------------|----------------|
| 10% | 5.236A | 1.987A | 1.984A | 0.98A | 85.007 | 86.369% | 0 | <6.0 | 44.63°C | 0.969 |
| | 12.109V | 5.033V | 3.326V | 5.103V | 98.424 | | | | 40.42°C | 115.14V |
| 20% | 11.504A | 2.983A | 2.979A | 1.179A | 169.98 | 90.096% | 0 | <6.0 | 45.38°C | 0.98 |
| | 12.090V | 5.03V | 3.323V | 5.091V | 188.667 | | | | 40.78°C | 115.13V |
| 30% | 18.112A | 3.481A | 3.479A | 1.379A | 254.999 | 90.74% | 688 | 16.9 | 41.16°C | 0.985 |
| | 12.088V | 5.028V | 3.32V | 5.079V | 281.025 | | | | 46.23°C | 115.09V |
| 40% | 24.724A | 3.98A | 3.979A | 1.579A | 340.099 | 90.802% | 687 | 16.9 | 41.64°C | 0.986 |
| | 12.089V | 5.026V | 3.318V | 5.067V | 374.555 | | | | 47.27°C | 115.07V |
| 50% | 30.991A | 4.978A | 4.979A | 1.781A | 425.144 | 90.456% | 683 | 16.7 | 42.54°C | 0.987 |
| | 12.088V | 5.024V | 3.314V | 5.054V | 469.997 | | | | 48.57°C | 115.04V |
| 60% | 37.215A | 5.978A | 5.981A | 1.984A | 509.685 | 89.843% | 677 | 16.4 | 42.73°C | 0.988 |
| | 12.089V | 5.02V | 3.311V | 5.041V | 567.308 | | | | 49.33°C | 115.02V |
| 70% | 43.502A | 6.98A | 6.986A | 2.188A | 595.002 | 89.074% | 869 | 16.1 | 43.29°C | 0.99 |
| | 12.089V | 5.017V | 3.308V | 5.028V | 667.974 | | | | 50.3°C | 114.99V |
| 80% | 49.790A | 7.98A | 7.99A | 2.292A | 679.812 | 88.258% | 1075 | 31.3 | 43.77°C | 0.991 |
| | 12.089V | 5.013V | 3.304V | 5.018V | 770.261 | | | | 51.79°C | 114.96V |
| 90% | 56.478A | 8.483A | 8.482A | 2.397A | 765.235 | 87.377% | 1330 | 37.4 | 44.36°C | 0.992 |
| | 12.088V | 5.011V | 3.301V | 5.008V | 875.797 | | | | 53.41°C | 114.93V |
| 100% | 62.895A | 8.987A | 9.006A | 3.01A | 850.052 | 86.353% | 1533 | 41.5 | 45.42°C | 0.992 |
| | 12.089V | 5.008V | 3.298V | 4.984V | 984.392 | | | | 55.47°C | 114.89V |
| 110% | 69.176A | 9.992A | 10.108A | 3.015A | 934.595 | 85.144% | 1628 | 44.6 | 46.76°C | 0.993 |
| | 12.090V | 5.004V | 3.294V | 4.976V | 1097.672 | | | | 57.7°C | 114.87V |
| CL1 | 0.116A | 12.006A | 11.974A | 0A | 101.309 | 84.607% | 600 | 12.3 | 41.07°C | 0.974 |
| | 12.100V | 5.014V | 3.315V | 5.117V | 119.741 | | | | 46.55°C | 115.14V |
| CL2 | 0.116A | 19.957A | 0A | 0A | 101.401 | 83.416% | 772 | 20.8 | 40.39°C | 0.975 |
| | 12.097V | 5.011V | 3.326V | 5.122V | 121.563 | | | | 47.46°C | 115.13V |
| CL3 | 0.116A | 0A | 19.929A | 0A | 67.397 | 77.984% | 779 | 21.2 | 40.06°C | 0.965 |
| | 12.103V | 5.029V | 3.311V | 5.118V | 86.425 | | | | 49.08°C | 115.14V |
| CL4 | 70.304A | 0A | 0A | 0A | 849.775 | 87.094% | 1515 | 41.3 | 45.59°C | 0.992 |
| | 12.087V | 5.023V | 3.308V | 5.07V | 975.697 | | | | 56.54°C | 114.89V |

All data and graphs included in this test report can be used by any individual on the following conditions:

- > It should be mentioned that the test results are provided by Cybenetics
- > The link to the original test results document should be provided in any case

20-80W LOAD TESTS 115V

| Test | 12V | 5V | 3.3V | 5VSB | DC/AC (Watts) | Efficiency | Fan Speed (RPM) | PSU Noise (dB[A]) | Temps (In/Out) | PF/AC Volts |
|------|---------|--------|--------|--------|------------------|------------|--------------------|----------------------|-------------------|----------------|
| 20W | 1.233A | 0.496A | 0.495A | 0.195A | 20.009 | 73.239% | 0 | <6.0 | 39.72°C | 0.88 |
| | 12.051V | 5.039V | 3.33V | 5.128V | 27.317 | | | | 36.65°C | 115.17V |
| 40W | 2.700A | 0.695A | 0.694A | 0.293A | 40.006 | 78.801% | 0 | <6.0 | 41.07°C | 0.94 |
| | 12.108V | 5.038V | 3.329V | 5.124V | 50.767 | | | | 37.62°C | 115.16V |
| 60W | 4.174A | 0.894A | 0.892A | 0.391A | 60.005 | 83.456% | 0 | <6.0 | 42.28°C | 0.959 |
| | 12.108V | 5.036V | 3.328V | 5.12V | 71.9 | | | | 38.48°C | 115.15V |
| 80W | 5.644A | 1.093A | 1.091A | 0.489A | 79.973 | 86.364% | 0 | <6.0 | 43.39°C | 0.968 |
| | 12.109V | 5.035V | 3.328V | 5.116V | 92.601 | | | | 39.46°C | 115.14V |

RIPPLE MEASUREMENTS 115V

| Test | 12V | 5V | 3.3V | 5VSB | Pass/Fail |
|------------|---------|---------|---------|---------|-----------|
| 10% Load | 5.44mV | 5.81mV | 7.22mV | 8.10mV | Pass |
| 20% Load | 10.80mV | 7.65mV | 6.61mV | 7.64mV | Pass |
| 30% Load | 7.53mV | 6.84mV | 8.24mV | 9.63mV | Pass |
| 40% Load | 7.58mV | 7.29mV | 9.46mV | 10.70mV | Pass |
| 50% Load | 8.65mV | 8.87mV | 10.78mV | 11.77mV | Pass |
| 60% Load | 9.56mV | 8.72mV | 11.34mV | 12.33mV | Pass |
| 70% Load | 9.52mV | 9.23mV | 12.26mV | 13.55mV | Pass |
| 80% Load | 10.33mV | 10.35mV | 16.89mV | 15.33mV | Pass |
| 90% Load | 11.19mV | 10.56mV | 17.14mV | 17.37mV | Pass |
| 100% Load | 16.18mV | 12.14mV | 19.19mV | 21.99mV | Pass |
| 110% Load | 16.21mV | 13.11mV | 20.20mV | 25.56mV | Pass |
| Crossload1 | 19.62mV | 8.54mV | 13.58mV | 8.91mV | Pass |
| Crossload2 | 16.25mV | 8.88mV | 6.10mV | 8.15mV | Pass |
| Crossload3 | 6.46mV | 6.88mV | 15.77mV | 9.32mV | Pass |
| Crossload4 | 16.68mV | 10.78mV | 13.85mV | 19.38mV | Pass |

All data and graphs included in this test report can be used by any individual on the following conditions:

- > It should be mentioned that the test results are provided by Cybenetics
- > The link to the original test results document should be provided in any case


230V

All data and graphs included in this test report can be used by any individual on the following conditions:

- > It should be mentioned that the test results are provided by Cybenetics
- > The link to the original test results document should be provided in any case

PAGE 11/16


EFFICIENCY GRAPH 230V

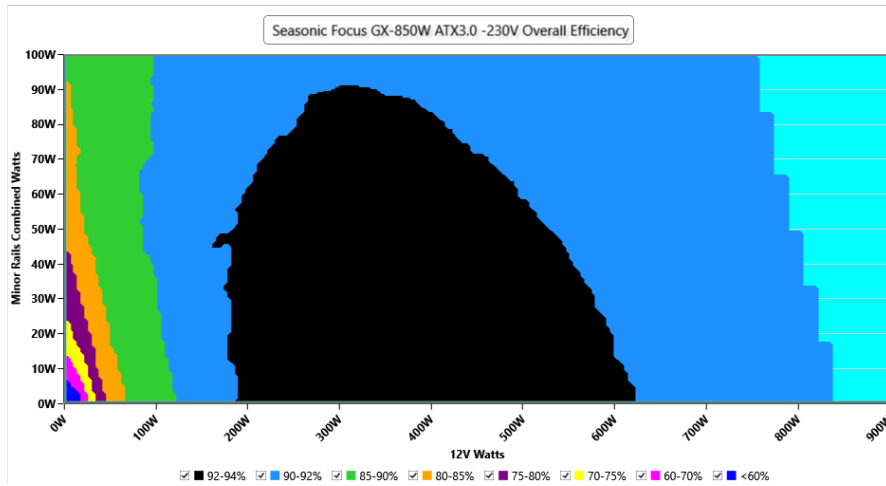

INFO

This graph depicts the PSU's efficiency throughout its entire operational range. For the generation of the efficiency and noise graphs we set our loaders to auto mode through our custom-made software before trying thousands of possible load combinations

NOISE GRAPH 230V

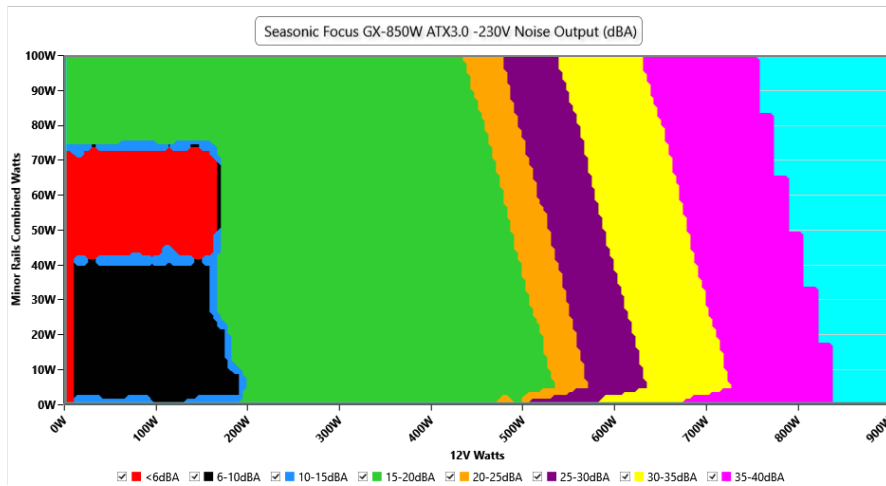

INFO

The PSU's noise in its entire operational range and under 30-32 °C ambient is depicted in this graph. The X axis represents the load on the +12V rail(s) while the Y axis is the load on the minor rails

All data and graphs included in this test report can be used by any individual on the following conditions:

- > It should be mentioned that the test results are provided by Cybenetics
- > The link to the original test results document should be provided in any case

VAMPIRE POWER -230V

Detailed Results

| | Average | Min | Limit Min | Max | Limit Max | Result |
|--------------------|----------|----------|-----------|----------|-----------|--------|
| Mains Voltage RMS: | 230.38 V | 230.36 V | 227.70 V | 230.40 V | 232.30 V | PASS |
| Mains Frequency: | 50.00 Hz | 50.00 Hz | 49.50 Hz | 50.00 Hz | 50.50 Hz | PASS |
| Mains Voltage CF: | 1.415 | 1.415 | 1.340 | 1.416 | 1.490 | PASS |
| Mains Voltage THD: | 0.14 % | 0.13 % | N/A | 0.16 % | 2.00 % | PASS |
| Real Power: | 0.165 W | 0.145 W | N/A | 0.193 W | N/A | N/A |
| Apparent Power: | 33.331 W | 33.316 W | N/A | 33.341 W | N/A | N/A |
| Power Factor: | 0.005 | N/A | N/A | N/A | N/A | N/A |

INFO

This graph is generated by the PPA Standby Power Analysis software which takes full control of the power analyzer during the whole procedure. This application features all of the EN50564 & IEC62301 test limits for standby power software testing

All data and graphs included in this test report can be used by any individual on the following conditions:

- > It should be mentioned that the test results are provided by Cybenetics
- > The link to the original test results document should be provided in any case

10-110% LOAD TESTS 230V

| Test | 12V | 5V | 3.3V | 5VSB | DC/AC (Watts) | Efficiency | Fan Speed (RPM) | PSU Noise (dB[A]) | Temps (In/Out) | PF/AC Volts |
|------|---------|---------|---------|--------|------------------|------------|-----------------------|----------------------|-------------------|----------------|
| 10% | 5.236A | 1.988A | 1.985A | 0.98A | 85.006 | 87.548% | 0 | <6.0 | 44.67°C | 0.852 |
| | 12.109V | 5.032V | 3.326V | 5.102V | 97.104 | | | | 40.46°C | 230.4V |
| 20% | 11.502A | 2.984A | 2.98A | 1.179A | 169.971 | 91.489% | 0 | <6.0 | 45.11°C | 0.926 |
| | 12.090V | 5.029V | 3.323V | 5.09V | 185.786 | | | | 40.59°C | 230.39V |
| 30% | 18.110A | 3.482A | 3.479A | 1.379A | 254.986 | 92.317% | 688 | 16.9 | 41.13°C | 0.951 |
| | 12.088V | 5.027V | 3.32V | 5.079V | 276.201 | | | | 46.18°C | 230.38V |
| 40% | 24.721A | 3.98A | 3.98A | 1.579A | 340.077 | 92.616% | 688 | 16.9 | 41.96°C | 0.963 |
| | 12.089V | 5.026V | 3.317V | 5.067V | 367.187 | | | | 47.48°C | 230.37V |
| 50% | 30.983A | 4.978A | 4.98A | 1.781A | 425.066 | 92.514% | 684 | 16.7 | 42.22°C | 0.969 |
| | 12.089V | 5.023V | 3.314V | 5.055V | 459.468 | | | | 48.25°C | 230.36V |
| 60% | 37.208A | 5.978A | 5.982A | 1.984A | 509.604 | 92.167% | 679 | 16.4 | 42.74°C | 0.974 |
| | 12.088V | 5.02V | 3.311V | 5.042V | 552.918 | | | | 49.34°C | 230.35V |
| 70% | 43.496A | 6.979A | 6.986A | 2.187A | 594.937 | 91.699% | 872 | 24.6 | 43.44°C | 0.977 |
| | 12.089V | 5.016V | 3.307V | 5.03V | 648.791 | | | | 50.47°C | 230.33V |
| 80% | 49.789A | 7.979A | 7.991A | 2.292A | 679.771 | 91.167% | 1080 | 31.4 | 43.85°C | 0.98 |
| | 12.088V | 5.013V | 3.304V | 5.019V | 745.632 | | | | 51.89°C | 230.32V |
| 90% | 56.477A | 8.482A | 8.482A | 2.396A | 765.213 | 90.638% | 1334 | 37.5 | 44.2°C | 0.982 |
| | 12.088V | 5.011V | 3.301V | 5.009V | 844.254 | | | | 53.28°C | 230.31V |
| 100% | 62.898A | 8.986A | 9.006A | 3.009A | 850.033 | 90.022% | 1532 | 41.5 | 45.21°C | 0.983 |
| | 12.088V | 5.008V | 3.298V | 4.986V | 944.248 | | | | 55.28°C | 230.29V |
| 110% | 69.179A | 9.991A | 10.108A | 3.014A | 934.6 | 89.313% | 1627 | 44.6 | 46.59°C | 0.984 |
| | 12.090V | 5.005V | 3.294V | 4.978V | 1046.432 | | | | 57.52°C | 230.28V |
| CL1 | 0.116A | 11.996A | 11.97A | 0A | 101.298 | 85.735% | 615 | 13.2 | 41.18°C | 0.878 |
| | 12.094V | 5.018V | 3.316V | 5.117V | 118.152 | | | | 46.62°C | 230.39V |
| CL2 | 0.116A | 19.954A | 0A | 0A | 101.401 | 84.493% | 772 | 20.8 | 40.31°C | 0.88 |
| | 12.096V | 5.012V | 3.326V | 5.122V | 120.014 | | | | 47.44°C | 230.4V |
| CL3 | 0.116A | 0A | 19.929A | 0A | 67.395 | 78.865% | 782 | 21.2 | 40.17°C | 0.829 |
| | 12.103V | 5.029V | 3.311V | 5.118V | 85.459 | | | | 49.19°C | 230.4V |
| CL4 | 70.309A | 0A | 0A | 0A | 849.718 | 90.695% | 1517 | 41.4 | 45.59°C | 0.983 |
| | 12.086V | 5.023V | 3.308V | 5.071V | 936.893 | | | | 56.57°C | 230.3V |

All data and graphs included in this test report can be used by any individual on the following conditions:

- > It should be mentioned that the test results are provided by Cybenetics
- > The link to the original test results document should be provided in any case

20-80W LOAD TESTS 230V

| Test | 12V | 5V | 3.3V | 5VSB | DC/AC (Watts) | Efficiency | Fan Speed (RPM) | PSU Noise (dB[A]) | Temps (In/Out) | PF/AC Volts |
|------|---------|--------|--------|--------|---------------|------------|-----------------|-------------------|----------------|-------------|
| 20W | 1.232A | 0.496A | 0.495A | 0.195A | 20.006 | 73.71% | 0 | <6.0 | 39.79°C | 0.516 |
| | 12.053V | 5.04V | 3.33V | 5.127V | 27.141 | | | | 36.7°C | 230.4V |
| 40W | 2.700A | 0.695A | 0.694A | 0.293A | 40.004 | 79.637% | 0 | <6.0 | 40.64°C | 0.704 |
| | 12.109V | 5.038V | 3.329V | 5.123V | 50.234 | | | | 37.34°C | 230.4V |
| 60W | 4.173A | 0.894A | 0.892A | 0.391A | 60.002 | 84.497% | 0 | <6.0 | 41.8°C | 0.789 |
| | 12.109V | 5.035V | 3.328V | 5.12V | 71.008 | | | | 38.29°C | 230.4V |
| 80W | 5.644A | 1.093A | 1.091A | 0.489A | 79.968 | 87.496% | 0 | <6.0 | 42.98°C | 0.842 |
| | 12.110V | 5.034V | 3.327V | 5.116V | 91.396 | | | | 39.17°C | 230.4V |

RIPPLE MEASUREMENTS 230V

| Test | 12V | 5V | 3.3V | 5VSB | Pass/Fail |
|------------|---------|---------|---------|---------|-----------|
| 10% Load | 4.53mV | 5.20mV | 6.21mV | 7.49mV | Pass |
| 20% Load | 11.82mV | 7.80mV | 6.51mV | 7.34mV | Pass |
| 30% Load | 8.48mV | 6.68mV | 7.98mV | 9.17mV | Pass |
| 40% Load | 8.09mV | 8.01mV | 9.16mV | 10.55mV | Pass |
| 50% Load | 8.55mV | 8.47mV | 10.43mV | 11.97mV | Pass |
| 60% Load | 8.80mV | 9.54mV | 11.59mV | 12.38mV | Pass |
| 70% Load | 9.21mV | 9.23mV | 12.51mV | 13.60mV | Pass |
| 80% Load | 10.02mV | 10.46mV | 16.33mV | 14.42mV | Pass |
| 90% Load | 10.64mV | 10.71mV | 17.44mV | 16.30mV | Pass |
| 100% Load | 16.43mV | 12.73mV | 18.61mV | 19.58mV | Pass |
| 110% Load | 18.21mV | 13.01mV | 20.25mV | 21.45mV | Pass |
| Crossload1 | 22.87mV | 8.24mV | 13.14mV | 8.48mV | Pass |
| Crossload2 | 19.06mV | 7.65mV | 5.90mV | 7.74mV | Pass |
| Crossload3 | 5.44mV | 6.58mV | 16.12mV | 9.68mV | Pass |
| Crossload4 | 16.64mV | 10.59mV | 13.90mV | 17.83mV | Pass |

All data and graphs included in this test report can be used by any individual on the following conditions:

- > It should be mentioned that the test results are provided by Cybenetics
- > The link to the original test results document should be provided in any case

Anex

Seasonic Focus GX-850 ATX3.0




Top side



Power specifications label

CERTIFICATIONS 115V

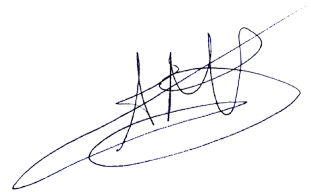Aristeidis Bitziopoulos
Lab Director

CERTIFICATIONS 230V



All data and graphs included in this test report can be used by any individual on the following conditions:

- > It should be mentioned that the test results are provided by Cybenetics
- > The link to the original test results document should be provided in any case