

Anex

Cooler Master MWE Bronze 450

Lab ID#: CM19450054
 Receipt Date: Jul 5, 2019
 Test Date: Dec 6, 2019

Report:

Report Date: Jun 21, 2019

DUT INFORMATION

Brand	Cooler Master
Manufacturer (OEM)	Gospower
Series	MWE Bronze
Model Number	
Serial Number	MPE4501ACAAB1191400001
DUT Notes	

DUT SPECIFICATIONS

Rated Voltage (Vrms)	100-240
Rated Current (Arms)	8-4
Rated Frequency (Hz)	50-60
Rated Power (W)	450
Type	ATX12V
Cooling	120mm Rifle Bearing Fan (DF1202512SELN)
Semi-Passive Operation	✓
Cable Design	Fixed cables

TEST EQUIPMENT

Electronic Loads	Chroma 63601-5 x4 Chroma 63600-2 x2 63640-80-80 x20 63610-80-20 x2
AC Sources	Chroma 6530, Keysight AC6804B
Power Analyzers	N4L PPA1530 x2
Sound Analyzer	Bruel & Kjaer 2270 G4
Microphone	Bruel & Kjaer Type 4955-A
Data Loggers	Picoscope TC-08 x2, Labjack U3-HV x2
Tachometer	UNI-T UT372 x2
Digital Multimeter	Keysight U1273AX, Fluke 289
UPS	CyberPower OLS3000E 3kVA x2
Transformer	3kVA x2

All data and graphs included in this test report can be used by any individual on the following conditions:

- > It should be mentioned that the test results are provided by Cybenetics
- > The link to the original test results document should be provided in any case

PAGE 1/17

Anex

Cooler Master MWE Bronze 450

RESULTS

Temperature Range (°C /°F)	30-32 / 86-89.6
ErP Lot 3/6 Ready	✓
(EU) No 617/2013 Compliance	✓

115V

Average Efficiency	84.602%
Efficiency With 10W (≤500W) or 2% (>500W)	71.924
Average Efficiency 5VSB	78.725%
Standby Power Consumption (W)	0.0743184
Average PF	0.974
Avg Noise Output	27.85 dB(A)
Efficiency Rating (ETA)	BRONZE
Noise Rating (LAMBDA)	A-

230V

Average Efficiency	87.142%
Average Efficiency 5VSB	77.820%
Standby Power Consumption (W)	0.1865110
Average PF	0.892
Avg Noise Output	27.32 dB(A)
Efficiency Rating (ETA)	
Noise Rating (LAMBDA)	A-

POWER SPECIFICATIONS

Rail		3.3V	5V	12V	5VSB	-12V
Max. Power	Amps	20	20	37.5	3	0.3
	Watts	120		450	15	3.6
Total Max. Power (W)		450				

HOLD-UP TIME & POWER OK SIGNAL (230V)

Hold-Up Time (ms)	17.5
AC Loss to PWR_OK Hold Up Time (ms)	15.8
PWR_OK Inactive to DC Loss Delay (ms)	1.7

All data and graphs included in this test report can be used by any individual on the following conditions:

- > It should be mentioned that the test results are provided by Cybenetics
- > The link to the original test results document should be provided in any case

CABLES AND CONNECTORS

Captive Cables

Description	Cable Count	Connector Count (Total)	Gauge	In Cable Capacitors
ATX connector 20+4 pin (610mm)	1	1	18-20AWG	No
4+4 pin EPS12V (630mm)	1	1	18AWG	No
6+2 pin PCIe (530mm+120mm)	1	2	18AWG	No
SATA (520mm+120mm+120mm)	2	6	18-20AWG	No
4-pin Molex (510mm+120mm+120mm+120mm)	1	4	18-20AWG	No
AC Power Cord (1400mm) - C13 coupler	1	1	18AWG	-

All data and graphs included in this test report can be used by any individual on the following conditions:

- > It should be mentioned that the test results are provided by Cybenetics
- > The link to the original test results document should be provided in any case

Anex

Cooler Master MWE Bronze 450


General Data	
Manufacturer (OEM)	Gospower
PCB Type	Single Sided
Primary Side	
Transient Filter	3x Y caps, 2x X caps, 2x CM chokes
Inrush Protection	NTC Thermistor
Bridge Rectifier(s)	1x GBU808 (800V, 8A @ 100°C)
APFC MOSFETS	1x Sanrise Tech SRC60R140B (630V, 11.2A @ 125°C, 0.1400hm)
APFC Boost Diode	1x Jilin Sino Microelectronics 15F60UHF (600V, 15A @ 100°C)
Hold-up Cap(s)	1x Elite (420V, 330uF, 2000h @ 85°C, GM)
Main Switchers	2x Jilin Sino Microelectronics JCS13N50FC (500V, 8A @ 100°C, 0.490hm)
APFC Controller	Champion CM6500UNX
Resonant Controllers	Champion CU6901V
Topology	Primary side: Half-Bridge & LLC converter Secondary side: Synchronous Rectification & DC-DC converters
Secondary Side	
+12V MOSFETS	4x Nce Power NCE4080 (40V, 56A @ 100°C, 6.5mOhm)
5V & 3.3V	DC-DC Converters: 4x IPS FTD05N03NA (30V, 75A @ 100°C, 6mOhm) PWM Controllers: ANPEC APW7159C
Filtering Capacitors	Electrolytics: 7x Elite (2-5,000h @ 105°C, ED), 4x Elite (2,000h @ 105°C, EL), 2x CapXon (2-5,000h @ 105°C, KF), 1x CapXon (3-10,000h @ 105°C, GH), 1x Rubycon (4-10,000 @ 105°C, YXJ) Polymers: CapXon
Supervisor IC	IN1S313I-SAG
Fan Model	Thermal Control DF1202512SELN (120mm, 12V, 0.25A, Rifle Bearing Fan)
5VSB Circuit	
Rectifier	-
Standby PWM Controller	On-Bright OB2365SP

All data and graphs included in this test report can be used by any individual on the following conditions:

- > It should be mentioned that the test results are provided by Cybenetics
- > The link to the original test results document should be provided in any case

EFFICIENCY UNDER HIGH AMBIENT TEMPERATURE

Efficiency: Cooler Master MWE Bronze 450
Ambient: 32°C - 40°C (89.6°F - 104°F)

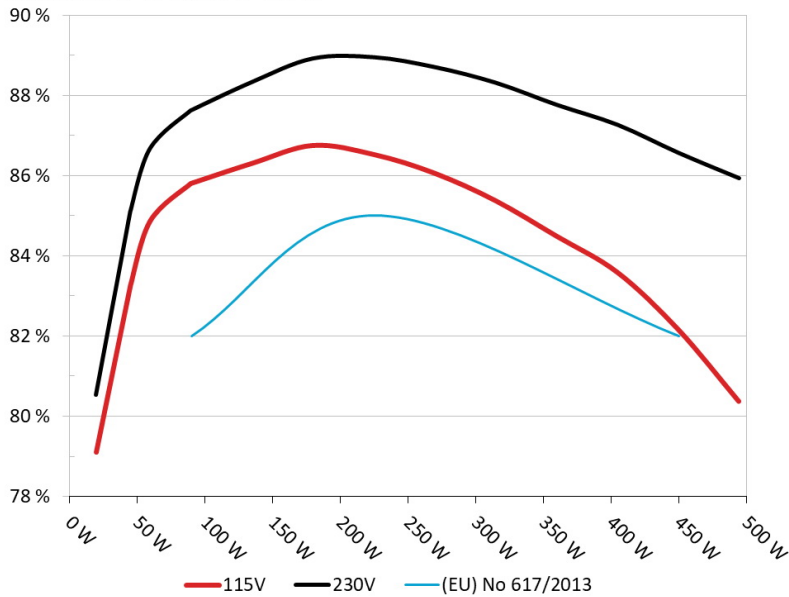


INFO

The PSU's efficiency under high ambient temperatures with 115V and 230V input. For this graph the results of the 10-110% load regulation table are used

5VSB EFFICIENCY

5VSB Efficiency: Cooler Master MWE Bronze 450
Ambient: 28°C - 32°C (82.4°F - 89.6°F)

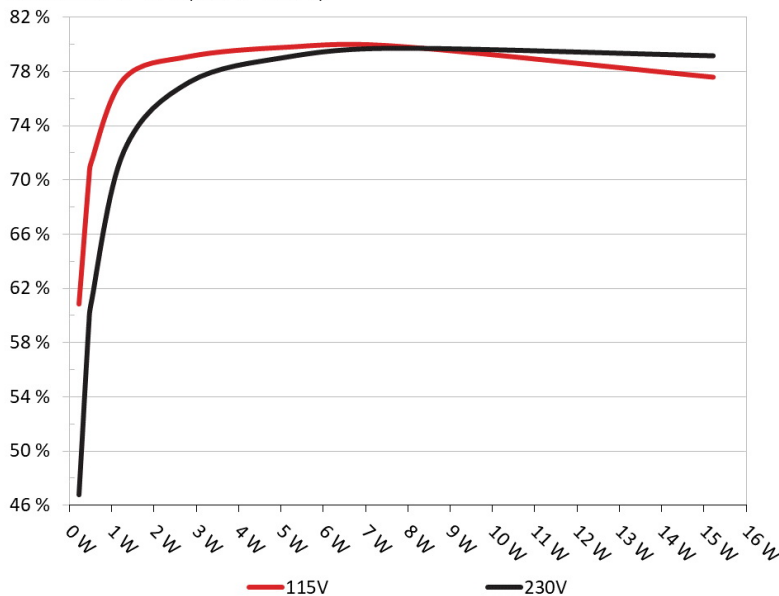

INFO

This graph depicts the efficiency levels of the 5VSB rail with 115V and 230V input

All data and graphs included in this test report can be used by any individual on the following conditions:

- > It should be mentioned that the test results are provided by Cybenetics
- > The link to the original test results document should be provided in any case

5VSB EFFICIENCY -115V (ERP LOT 3/6 & CEC)

Test #	5VSB	DC/AC (Watts)	Efficiency	PF/AC Volts
1	0.045A	0.233	60.836%	0.025
	5.172V	0.383		115.13V
2	0.090A	0.466	70.075%	0.043
	5.171V	0.665		115.12V
3	0.550A	2.836	79.107%	0.197
	5.155V	3.585		115.13V
4	1.000A	5.142	79.795%	0.288
	5.140V	6.444		115.12V
5	1.500A	7.686	79.879%	0.347
	5.123V	9.622		115.12V
6	3.000A	15.217	77.582%	0.427
	5.072V	19.614		115.12V

5VSB EFFICIENCY -230V (ERP LOT 3/6 & CEC)

Test #	5VSB	DC/AC (Watts)	Efficiency	PF/AC Volts
1	0.045A	0.233	46.787%	0.010
	5.173V	0.498		230.30V
2	0.090A	0.466	59.439%	0.015
	5.171V	0.784		230.30V
3	0.550A	2.837	77.197%	0.069
	5.156V	3.675		230.30V
4	1.000A	5.142	79.047%	0.118
	5.141V	6.505		230.30V
5	1.500A	7.687	79.699%	0.164
	5.124V	9.645		230.30V
6	3.000A	15.218	79.141%	0.264
	5.072V	19.229		230.30V

All data and graphs included in this test report can be used by any individual on the following conditions:

- > It should be mentioned that the test results are provided by Cybenetics
- > The link to the original test results document should be provided in any case

Anex

Cooler Master MWE Bronze 450


115V

All data and graphs included in this test report can be used by any individual on the following conditions:

- > It should be mentioned that the test results are provided by Cybenetics
- > The link to the original test results document should be provided in any case

PAGE 7/17


EFFICIENCY GRAPH 115V

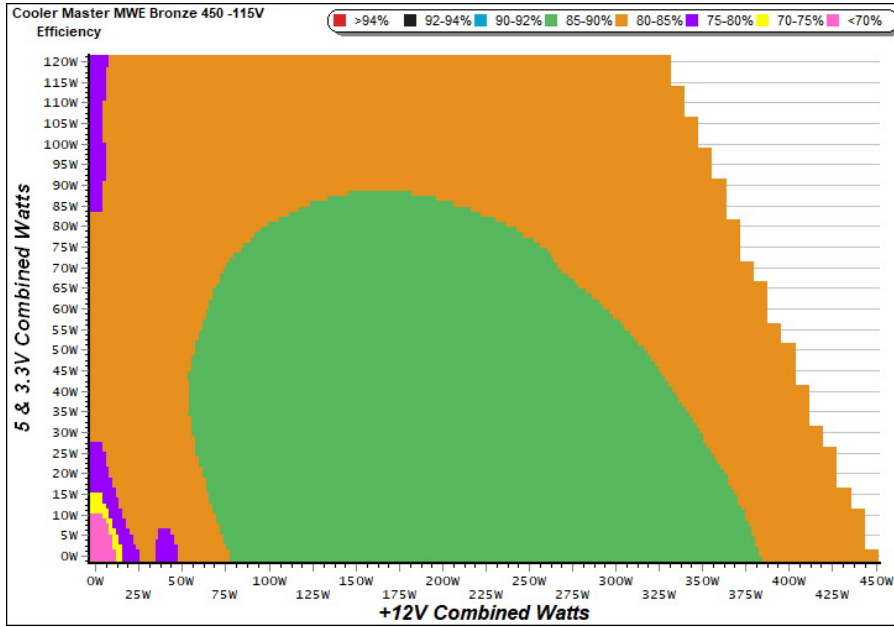

INFO

This graph depicts the PSU's efficiency throughout its entire operational range. For the generation of the efficiency and noise graphs we set our loaders to auto mode through our custom-made software before trying thousands of possible load combinations

NOISE GRAPH 115V

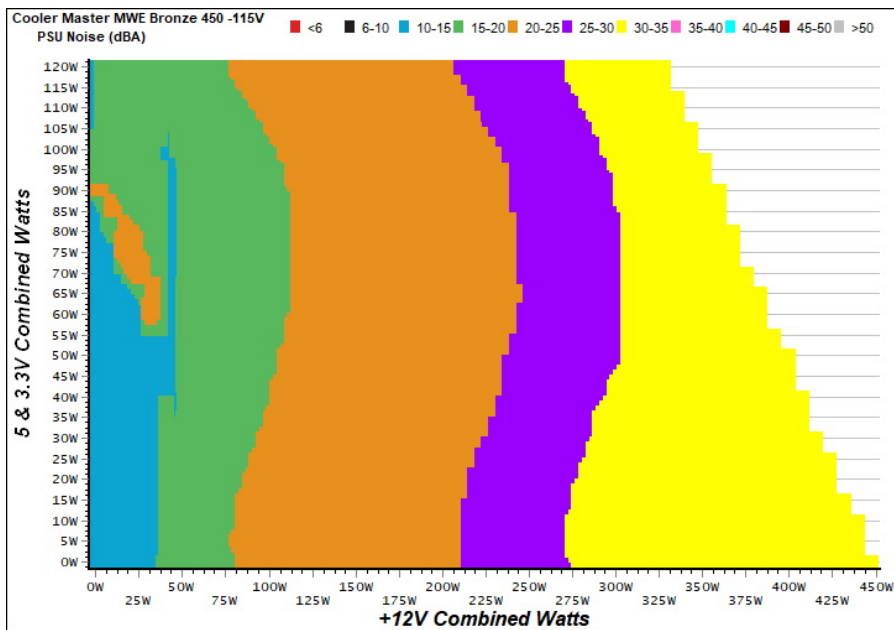

INFO


The PSU's noise in its entire operational range and under 30-32 °C ambient is depicted in this graph. The X axis represents the load on the +12V rail(s) while the Y axis is the load on the minor rails

All data and graphs included in this test report can be used by any individual on the following conditions:

- > It should be mentioned that the test results are provided by Cybenetics
- > The link to the original test results document should be provided in any case

VAMPIRE POWER -115V

Power - MPE4501ACAAB1191400001 - 10/06/2019 - 12:55

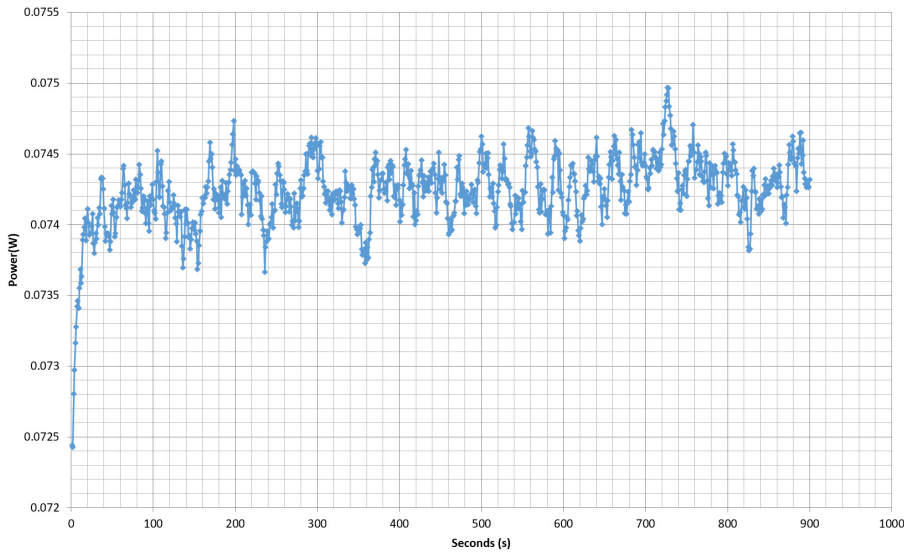

INFO

This graph is generated by the PPA Standby Power Analysis software which takes full control of the power analyzer during the whole procedure. This application features all of the EN50564 & IEC62301 test limits for standby power software testing

All data and graphs included in this test report can be used by any individual on the following conditions:

- > It should be mentioned that the test results are provided by Cybenetics
- > The link to the original test results document should be provided in any case

10-110% LOAD TESTS 115V

Test #	12V	5V	3.3V	5VSB	DC/AC (Watts)	Efficiency	Fan Speed (RPM)	PSU Noise (dB[A])	Temps (In/Out)	PF/AC Volts
1	1.927A	2.014A	1.983A	0.976A	44.892	83.235%	0	<6.0	40.71°C	0.900
	12.084V	4.968V	3.327V	5.127V	53.934				35.00°C	115.13V
2	4.839A	3.031A	2.985A	1.175A	89.409	84.754%	870	18.5	35.99°C	0.958
	12.089V	4.951V	3.316V	5.110V	105.492				42.21°C	115.12V
3	8.167A	3.545A	3.477A	1.375A	134.501	86.311%	904	21.2	36.46°C	0.974
	12.060V	4.939V	3.306V	5.094V	155.833				43.38°C	115.12V
4	11.504A	4.062A	4.002A	1.576A	179.727	86.760%	987	23.1	36.65°C	0.972
	12.041V	4.926V	3.297V	5.078V	207.154				44.16°C	115.12V
5	14.517A	5.093A	5.021A	1.779A	225.026	86.532%	1141	27.4	37.35°C	0.977
	12.022V	4.909V	3.286V	5.060V	260.050				45.33°C	115.12V
6	17.472A	6.134A	6.046A	1.984A	269.545	86.070%	1292	29.0	37.93°C	0.981
	12.004V	4.892V	3.275V	5.042V	313.170				46.84°C	115.12V
7	20.503A	7.181A	7.078A	2.190A	314.851	85.381%	1473	33.0	38.40°C	0.984
	11.986V	4.875V	3.263V	5.023V	368.761				48.00°C	115.12V
8	23.543A	8.236A	8.117A	2.398A	360.171	84.492%	1480	33.1	38.64°C	0.986
	11.968V	4.858V	3.252V	5.005V	426.279				48.69°C	115.13V
9	26.992A	8.774A	8.633A	2.404A	405.067	83.590%	1481	33.1	39.34°C	0.988
	11.950V	4.845V	3.243V	4.994V	484.585				49.74°C	115.13V
10	30.182A	9.315A	9.187A	3.024A	449.876	82.170%	1481	33.1	39.93°C	0.989
	11.933V	4.832V	3.233V	4.961V	547.497				50.93°C	115.13V
11	33.991A	9.332A	9.209A	3.030A	494.681	80.377%	1480	33.1	40.05°C	0.990
	11.914V	4.823V	3.225V	4.952V	615.448				51.56°C	115.15V
CL1	0.142A	14.002A	14.000A	0.000A	115.472	79.624%	1408	32.1	37.64°C	0.972
	12.060V	4.853V	3.272V	5.110V	145.022				45.98°C	115.13V
CL2	37.512A	1.003A	0.998A	1.000A	461.016	83.187%	1482	33.1	39.69°C	0.990
	11.937V	4.906V	3.266V	5.056V	554.190				50.66°C	115.13V

All data and graphs included in this test report can be used by any individual on the following conditions:

- > It should be mentioned that the test results are provided by Cybenetics
- > The link to the original test results document should be provided in any case

20-80W LOAD TESTS 115V

Test #	12V	5V	3.3V	5VSB	DC/AC (Watts)	Efficiency	Fan Speed (RPM)	PSU Noise (dB[A])	PF/AC Volts
1	1.201A	0.501A	0.479A	0.194A	19.588	79.108%	0	<6.0	0.750
	12.066V	4.985V	3.336V	5.163V	24.761				115.13V
2	2.460A	1.005A	0.988A	0.388A	40.005	83.276%	0	<6.0	0.884
	12.079V	4.977V	3.331V	5.151V	48.039				115.13V
3	3.652A	1.510A	1.472A	0.584A	59.489	84.881%	0	<6.0	0.929
	12.072V	4.970V	3.326V	5.140V	70.085				115.13V
4	4.917A	2.016A	1.984A	0.780A	79.881	85.811%	0	<6.0	0.956
	12.058V	4.962V	3.321V	5.128V	93.090				115.12V

RIPPLE MEASUREMENTS 115V

Test	12V	5V	3.3V	5VSB	Pass/Fail
10% Load	81.2 mV	18.2 mV	15.2 mV	18.6 mV	Pass
20% Load	38.5 mV	16.0 mV	17.4 mV	18.9 mV	Pass
30% Load	34.1 mV	16.7 mV	19.2 mV	20.2 mV	Pass
40% Load	32.4 mV	17.1 mV	18.3 mV	20.0 mV	Pass
50% Load	30.7 mV	16.7 mV	19.9 mV	19.6 mV	Pass
60% Load	32.0 mV	17.7 mV	20.6 mV	19.9 mV	Pass
70% Load	39.3 mV	18.0 mV	23.6 mV	20.0 mV	Pass
80% Load	32.6 mV	20.6 mV	26.8 mV	21.1 mV	Pass
90% Load	33.2 mV	20.9 mV	28.2 mV	23.2 mV	Pass
100% Load	45.4 mV	23.0 mV	30.2 mV	26.4 mV	Pass
110% Load	45.3 mV	22.4 mV	29.3 mV	25.6 mV	Pass
Crossload 1	41.9 mV	26.9 mV	34.9 mV	20.1 mV	Pass
Crossload 2	44.5 mV	17.6 mV	15.6 mV	23.2 mV	Pass

All data and graphs included in this test report can be used by any individual on the following conditions:

- > It should be mentioned that the test results are provided by Cybenetics
- > The link to the original test results document should be provided in any case

Anex

Cooler Master MWE Bronze 450


230V

All data and graphs included in this test report can be used by any individual on the following conditions:

- > It should be mentioned that the test results are provided by Cybenetics
- > The link to the original test results document should be provided in any case

PAGE 12/17


EFFICIENCY GRAPH 230V

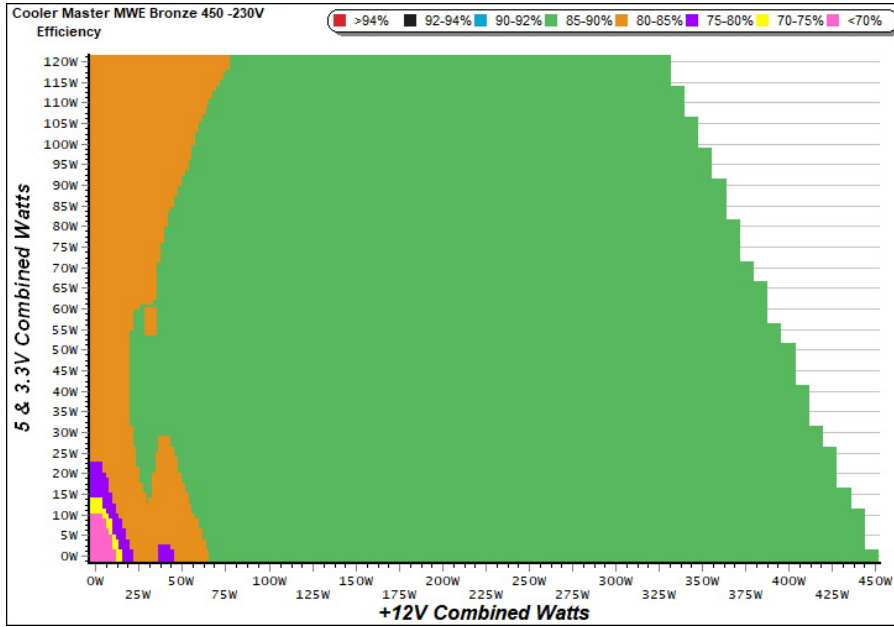

INFO

This graph depicts the PSU's efficiency throughout its entire operational range. For the generation of the efficiency and noise graphs we set our loaders to auto mode through our custom-made software before trying thousands of possible load combinations

NOISE GRAPH 230V

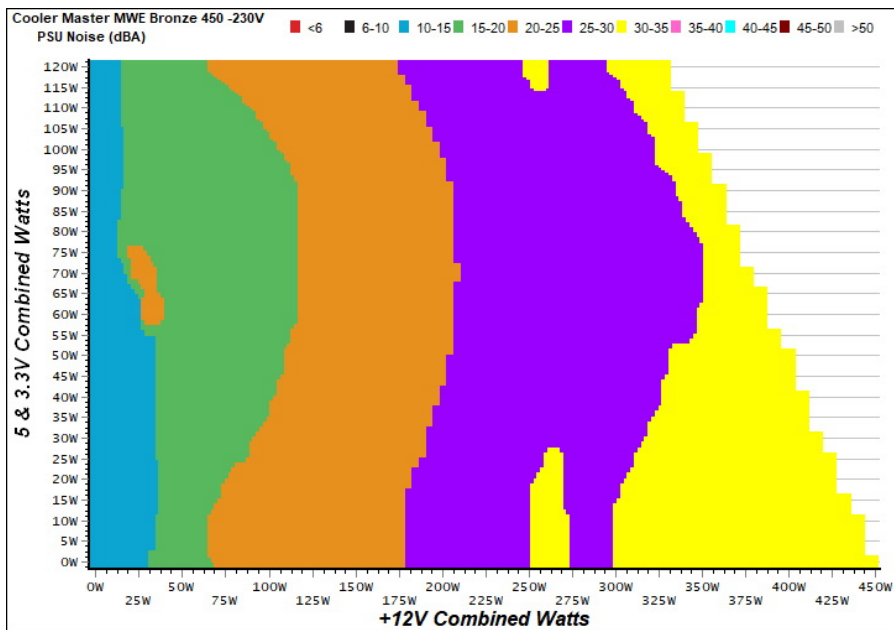

INFO


The PSU's noise in its entire operational range and under 30-32 °C ambient is depicted in this graph. The X axis represents the load on the +12V rail(s) while the Y axis is the load on the minor rails

All data and graphs included in this test report can be used by any individual on the following conditions:

- > It should be mentioned that the test results are provided by Cybenetics
- > The link to the original test results document should be provided in any case

VAMPIRE POWER -230V

Power - MPE4501ACAAB1191400001 - 10/06/2019 - 12:55

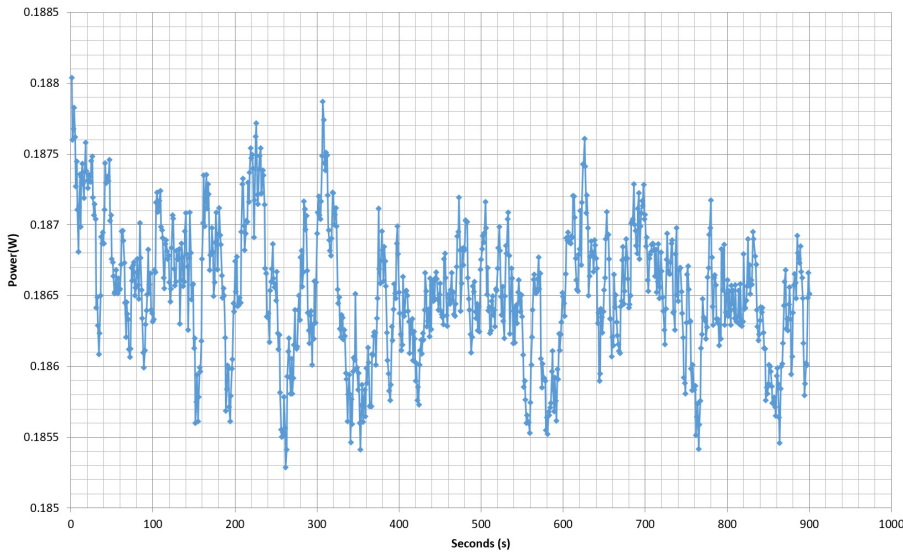

INFO

This graph is generated by the PPA Standby Power Analysis software which takes full control of the power analyzer during the whole procedure. This application features all of the EN50564 & IEC62301 test limits for standby power software testing

All data and graphs included in this test report can be used by any individual on the following conditions:

- > It should be mentioned that the test results are provided by Cybenetics
- > The link to the original test results document should be provided in any case

10-110% LOAD TESTS 230V

Test #	12V	5V	3.3V	5VSB	DC/AC (Watts)	Efficiency	Fan Speed (RPM)	PSU Noise (dB[A])	Temps (In/Out)	PF/AC Volts
1	1.928A	2.013A	1.984A	0.976A	44.906	84.717%	0	<6.0	41.00°C	0.576
	12.086V	4.968V	3.327V	5.126V	53.007				34.86°C	230.32V
2	4.839A	3.030A	2.986A	1.175A	89.404	86.442%	832	17.7	35.64°C	0.762
	12.089V	4.951V	3.316V	5.109V	103.427				42.15°C	230.32V
3	8.167A	3.543A	3.478A	1.375A	134.492	88.326%	874	18.9	36.01°C	0.845
	12.060V	4.938V	3.306V	5.094V	152.268				43.25°C	230.31V
4	11.503A	4.062A	4.002A	1.576A	179.714	88.917%	1034	24.2	36.75°C	0.888
	12.041V	4.926V	3.297V	5.078V	202.114				44.37°C	230.31V
5	14.515A	5.093A	5.021A	1.779A	225.002	88.948%	1137	26.9	37.50°C	0.913
	12.022V	4.909V	3.286V	5.060V	252.958				45.83°C	230.31V
6	17.472A	6.134A	6.044A	1.984A	269.521	88.705%	1272	29.1	37.84°C	0.929
	12.003V	4.892V	3.275V	5.042V	303.840				46.49°C	230.32V
7	20.503A	7.181A	7.077A	2.190A	314.831	88.314%	1428	32.5	38.09°C	0.940
	11.985V	4.875V	3.263V	5.024V	356.492				47.10°C	230.32V
8	23.544A	8.236A	8.119A	2.398A	360.144	87.761%	1480	33.1	38.92°C	0.948
	11.966V	4.858V	3.252V	5.005V	410.370				48.85°C	230.33V
9	26.996A	8.773A	8.633A	2.403A	405.051	87.263%	1475	33.1	39.37°C	0.955
	11.948V	4.845V	3.243V	4.994V	464.174				49.78°C	230.32V
10	30.188A	9.315A	9.186A	3.024A	449.856	86.568%	1476	33.1	39.71°C	0.959
	11.930V	4.832V	3.233V	4.962V	519.655				50.48°C	230.32V
11	33.995A	9.332A	9.209A	3.030A	494.664	85.936%	1476	33.1	40.39°C	0.962
	11.912V	4.823V	3.225V	4.953V	575.620				52.10°C	230.32V
CL1	0.144A	14.002A	13.999A	0.000A	115.478	81.503%	1449	32.9	37.81°C	0.832
	12.057V	4.852V	3.272V	5.109V	141.686				45.70°C	230.31V
CL2	37.514A	1.002A	0.999A	1.000A	460.927	87.572%	1475	33.1	39.95°C	0.959
	11.934V	4.906V	3.266V	5.056V	526.339				50.48°C	230.32V

All data and graphs included in this test report can be used by any individual on the following conditions:

- > It should be mentioned that the test results are provided by Cybenetics
- > The link to the original test results document should be provided in any case

20-80W LOAD TESTS 230V

Test #	12V	5V	3.3V	5VSB	DC/AC (Watts)	Efficiency	Fan Speed (RPM)	PSU Noise (dB[A])	PF/AC Volts
1	1.203A	0.502A	0.479A	0.194A	19.627	80.544%	0	<6.0	0.353
	12.074V	4.986V	3.337V	5.162V	24.368				230.32V
2	2.462A	1.005A	0.990A	0.389A	40.055	85.100%	0	<6.0	0.540
	12.084V	4.978V	3.331V	5.150V	47.068				230.32V
3	3.654A	1.511A	1.472A	0.584A	59.526	86.674%	0	<6.0	0.654
	12.074V	4.970V	3.326V	5.139V	68.678				230.32V
4	4.919A	2.015A	1.986A	0.780A	79.906	87.620%	0	<6.0	0.732
	12.058V	4.962V	3.321V	5.127V	91.196				230.32V

RIPPLE MEASUREMENTS 230V

Test	12V	5V	3.3V	5VSB	Pass/Fail
10% Load	75.1 mV	16.9 mV	15.4 mV	18.9 mV	Pass
20% Load	41.2 mV	15.7 mV	16.8 mV	19.2 mV	Pass
30% Load	35.9 mV	17.2 mV	17.0 mV	18.5 mV	Pass
40% Load	33.9 mV	17.1 mV	18.3 mV	19.4 mV	Pass
50% Load	32.0 mV	16.9 mV	18.0 mV	18.7 mV	Pass
60% Load	32.1 mV	17.6 mV	20.4 mV	19.3 mV	Pass
70% Load	37.6 mV	18.8 mV	23.1 mV	21.5 mV	Pass
80% Load	31.7 mV	20.1 mV	27.5 mV	21.2 mV	Pass
90% Load	31.3 mV	20.5 mV	28.0 mV	20.8 mV	Pass
100% Load	44.3 mV	23.1 mV	30.0 mV	25.6 mV	Pass
110% Load	45.5 mV	22.1 mV	29.8 mV	24.2 mV	Pass
Crossload 1	41.3 mV	26.5 mV	35.1 mV	19.5 mV	Pass
Crossload 2	44.7 mV	17.4 mV	15.8 mV	22.4 mV	Pass

All data and graphs included in this test report can be used by any individual on the following conditions:

- > It should be mentioned that the test results are provided by Cybenetics
- > The link to the original test results document should be provided in any case


Anex

Cooler Master MWE Bronze 450




Top side

450W		MODEL / 型			
Switching Power S					
AC INPUT 交流輸入/交流輸入	100-240V~, 8-4A, 50-60Hz				
DC OUTPUT 直流輸出/直流輸出	+5V	+3.3V	+12V	-12V	+5VSB
	20A	20A	37.5A	0.3A	3A
TOTAL POWER 總功率/总功率	120W	450W	3.6W	15W	
	450W				



Power specifications label

CERTIFICATIONS 115V

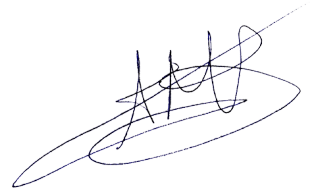Aristeidis Bitziopoulos
Lab Director

CERTIFICATIONS 230V



All data and graphs included in this test report can be used by any individual on the following conditions:

- > It should be mentioned that the test results are provided by Cybenetics
- > The link to the original test results document should be provided in any case