

Anex Corsair CX650M

Lab ID#: 110

Receipt Date: -

Report Date: May 17, 2018

Report:

Test Date: -

DUT INFORMATION					
Brand	Corsair				
Manufacturer (OEM)	Channel Well Technology				
Series	CXM				
Model Number	CX650M				
Serial Number	16457117000022410765				
DUT Notes	CP-9020103				

DUT SPECIFICATIONS						
Rated Voltage (Vrms)	100-240					
Rated Current (Arms)	10-5					
Rated Frequency (Hz)	47-63					
Rated Power (W)	650					
Туре	ATX12V					
Cooling	120mm Sleeve Bearing Fan (HA1225H12S-Z)					
Semi-Passive Operation	Х					
Cable Design	Semi Modular					

POWER SPECIFICATIONS						
Rail	3.3V	5V	12V	5VSB	-12V	
May Dayyar	Amps	25	25 25		3	0.8
Max. Power Watts		130	130		15	9.6
Total Max. Power (W)	650					

CABLES AND CONNECTORS						
Native Cables						
Description	Cable Count	Connector Count (Total)	Gauge			
ATX connector 20+4 pin (610mm)	1	1	16-22AWG			
4+4 pin EPS12V (650mm)	1	1	18AWG			
Modular Cables						
6+2 pin PCle (600mm+150mm)	2	4	16-18AWG			
SATA (360mm+120mm+120mm+120mm)	1	4	18AWG			
SATA (490mm+120mm)	1	2	18AWG			
4 pin Molex (450mm+100mm+100mm) / FDD (+100mm)	1	3/1	18-22AWG			

All data and graphs included in this test report can be used by any individual on the following conditions:

- > It should be mentioned that the test results are provided by Cybenetics
- > The link to the original test results document should be provided in any case

PAGE 1/9



Anex Corsair CX650M

General Data	
Manufacturer (OEM)	CWT
Platform Model	-
Primary Side	
Transient Filter	4x Y caps, 2x X caps, 2x CM & 1x DM chokes, 1x MOV
Inrush Protection	NTC Thermistor & Diode
Bridge Rectifier(s)	1x GBU1006 (600 V, 10 A @ 100 °C)
APFC MOSFETS	2x Fairchild FCPF190N60E (650 V, 13.1 A @ 100 °C, 0.16 Ohm)
APFC Boost Diode	1x STMicroelectronics STTH8S06D (600 V, 8 A @ 125 °C)
Hold-up Cap(s)	1x Nippon Chemi-Con (400 V, 470 uF, 2000 h @ 105 °C, KMW)
Main Switchers	2x Infineon IPA50R280CE (550 V, 11.4 A @ 100 °C, 0.28 Ohm)
Combo APFC/PWM Controller	Champion CM6800TX
Topology	Primary side: Double-Forward Secondary side: Synchronous Rectification & DC-DC converters
Secondary Side	
+12V MOSFETS	4x Infineon BSC039N06NS (60 V, 65 A @ 100 °C, 3.9 mOhm)
5V & 3.3V	DC-DC Converters: 3x UBIQ QM3006D (30 V, 57 A @ 100 °C, 5.5 mOhm), 3x UBIQ QM3004D (30 V, 40 A @ 100 °C, 8.5 mOhm) PWM Controller: APW7159
Filtering Capacitors	Electrolytics: Nippon Chemi-Con (105 °C, KY), SAMXON (105 °C), Suscon (105 °C) Polymers: Nippon Chemi-Con, APAQ, Teapo
Supervisor IC	Weltrend WT7502 (OVP, UVP, OCP, SCP, OTP)
Fan Model	Power Logic PLA13525S12M (12 V, 0.40 A, 111.1 CFM, 41.6 dBA, Hydro Dynamic Bearing)
5VSB Circuit	
Rectifier	1x MBR2045CT SBR (45 V, 20 A)
Standby PWM Controller	On-Bright OB5269CP

All data and graphs included in this test report can be used by any individual on the following conditions:

PAGE 2/9

> It should be mentioned that the test results are provided by Cybenetics

> The link to the original test results document should be provided in any case



Anex Corsair CX650M

RESULTS	
Temperature Range (°C/°F)	30-32 / 86-89.6
Average Efficiency	85.784
Efficiency With 10W (≤500W) or 2% (>500W) Load -115V	0.000
Average Efficiency 5VSB	79.818
Standby Power Consumption (W) -115V	0.0438863
Standby Power Consumption (W) -230V	0.0559482
Average PF	0.993
ErP Lot 3/6 Ready	/
(EU) No 617/2013 Compliance	/
Avg Noise Output	29.91
Efficiency Rating (ETA)	GOLD
Noise Rating (LAMBDA)	A-

TEST EQUIPMENT							
Electronic Loads	Chroma 6314A x2 Chroma 63601-5 x2 63123A x6 Chroma 63600-2 63102A 63640-80-80 x10 63101A 63610-80-20						
AC Sources	Chroma 6530, Chroma 61604						
Power Analyzers	N4L PPA1530, N4L PPA5530						
Oscilloscopes	Picoscope 4444 & 3424, Keysight DSOX3024A, Rigol DS2072A						
Voltmeter	Keithley 2015 THD 6.5 Digit						
Sound Analyzer	Bruel & Kjaer 2250-L G4						
Microphone	Bruel & Kjaer Type 4189						
Data Loggers	Picoscope TC-08 x2, Labjack U3-HV x2						


All data and graphs included in this test report can be used by any individual on the following conditions:


- > It should be mentioned that the test results are provided by Cybenetics
- > The link to the original test results document should be provided in any case

PAGE 3/9



Anex Corsair CX650M

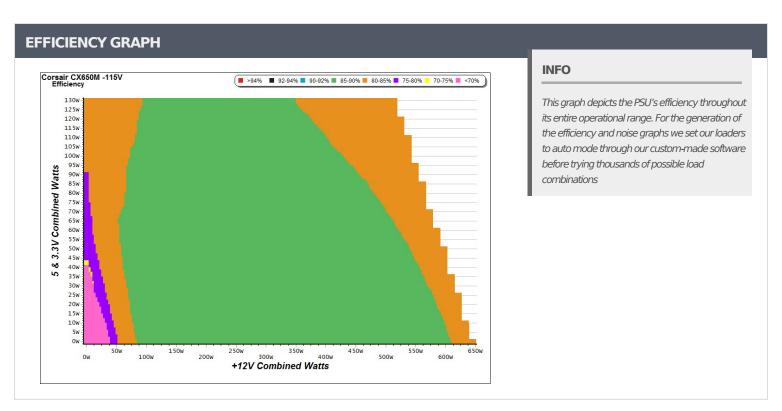

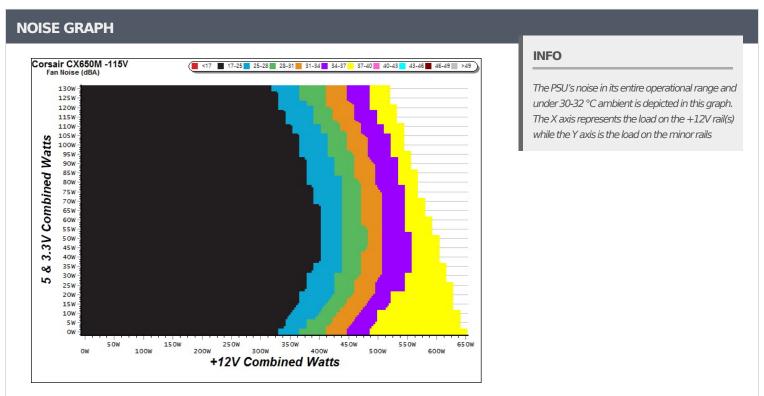

All data and graphs included in this test report can be used by any individual on the following conditions:

- > It should be mentioned that the test results are provided by Cybenetics
- > The link to the original test results document should be provided in any case

PAGE 4/9




Anex Corsair CX650M

5VSB	5VSB EFFICIENCY -115V (ERP LOT 3/6 & CEC)						
Test #	5VSB	DC/AC (Watts)	Efficiency	PF/AC Volts			
1	0.042A	0.211	70.1000/	0.031			
1	5.033V	0.301	70.100%	115.11V			
2	0.087A	0.438	75.779%	0.059			
	5.032V	0.578	75.779%	115.11V			
	0.532A	2.673	00 2700/	0.254			
3	5.027V	3.330	80.270%	115.11V			
4	1.002A	5.030	00.1700/	0.343			
4	5.020V 6.274		80.172%	115.10V			
_	1.502A	7.528	00.1100/	0.389			
5	5.013V	9.396	80.119%	115.12V			
6	3.001A	14.982	70.1110/	0.447			
6	4.992V	18.938	79.111%	115.10V			

5VSB	5VSB EFFICIENCY -230V (ERP LOT 3/6 & CEC)							
Test #	5VSB	DC/AC (Watts)	Efficiency	PF/AC Volts				
1	0.042A	0.210	CE 0210/	0.010				
1	5.032V	0.319	65.831%	230.30V				
2	0.087A	0.438	72.397%	0.018				
2	5.032V	0.605	72.397%	230.29V				
3	0.532A	2.673	78.826%	0.096				
3	5.026V	3.391	78.820%	230.28V				
4	1.002A	5.030	70 5120/	0.164				
4	5.020V	6.326	79.513%	230.28V				
_	1.502A	7.527	70 5020/	0.219				
5	5.012V	9.457	79.592%	230.28V				
6	3.001A	14.981	70.6270/	0.316				
6	4.992V	18.814	79.627%	230.28V				

VAMPIRE POWER -115V

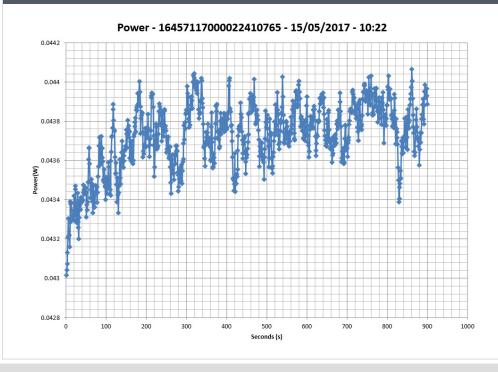

INFO

This graph is generated by the PPA Standby Power Analysis software which takes full control of the power analyzer during the whole procedure. This application features all of the EN50564 & IEC62301 test limits for standby power software testing


All data and graphs included in this test report can be used by any individual on the following conditions:


- > It should be mentioned that the test results are provided by Cybenetics
- > The link to the original test results document should be provided in any case

PAGE 5/9



Anex Corsair CX650M

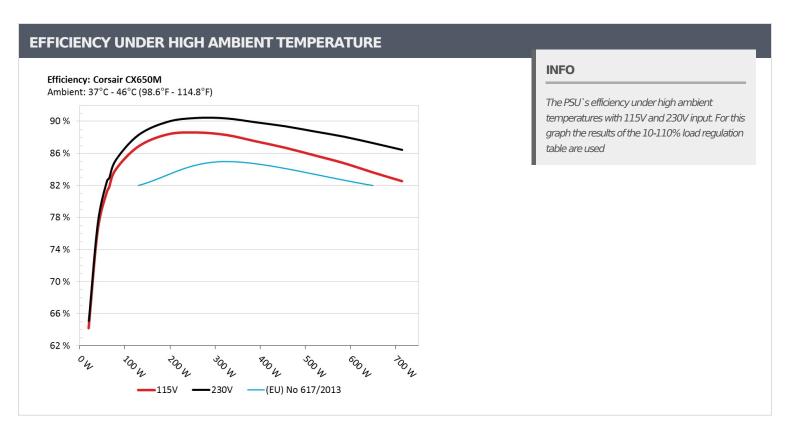

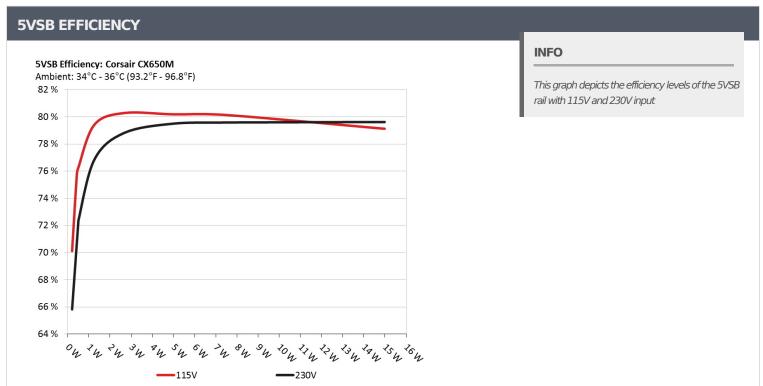

All data and graphs included in this test report can be used by any individual on the following conditions:

- > It should be mentioned that the test results are provided by Cybenetics
- > The link to the original test results document should be provided in any case

PAGE 6/9



Anex Corsair CX650M

10-1	.10% LOA	D TESTS								
Test #	12V	5V	3.3V	5VSB	DC/AC (Watts)	Efficiency	Fan Speed (RPM)	Fan Noise (dB[A])	Temps (In/Out)	PF/AC Volts
1	3.560A	1.975A	1.994A	0.995A	64.795	01.71.40/	025	20.2	38.50°C	0.971
1	12.141V	5.063V	3.307V	5.003V	79.295	81.714%	925	20.3	42.99°C	115.13\
2	8.160A	2.968A	3.004A	1.201A	129.800	06.0240/	025	20.2	38.99°C	0.989
2	12.124V	5.049V	3.293V	4.988V	149.480	86.834%	925	20.3	44.29°C	115.12\
2	13.115A	3.478A	3.529A	1.406A	194.916	00.2400/	025	20.2	39.33°C	0.993
3	12.109V	5.038V	3.284V	4.975V	220.623	88.348%	925	20.3	45.84°C	115.12\
	18.078A	3.977A	4.028A	1.610A	259.771	00 5700/	005	20.2	39.94°C	0.995
4	12.092V	5.027V	3.274V	4.964V	293.264	88.579%	925	20.3	47.84°C	115.13\
_	22.716A	4.980A	5.053A	1.815A	324.723	00.0750/	005	20.2	40.20°C	0.996
5	12.075V	5.013V	3.262V	4.947V	367.853	88.275%	925	20.3	49.63°C	115.12\
	27.365A	6.004A	6.092A	2.025A	389.760		1190 25.1	25.1	41.09°C	0.996
6	12.058V	4.999V	3.248V	4.934V	445.505	87.487%		51.50°C	115.12\	
_	32.024A	7.021A	7.137A	2.236A	454.669	00.0004	1400	20.4	41.98°C	0.997
7	12.041V	4.983V	3.235V	4.917V	524.482	86.689%	1480	30.4	52.80°C	115.12\
	36.702A	8.056A	8.192A	2.445A	519.668		4-00		42.73°C	0.997
8	12.023V	4.968V	3.222V	4.901V	606.077	85.743%	1780	35.7	54.24°C	115.12\
	41.820A	8.576A	8.753A	2.453A	584.729				44.07°C	0.998
9	12.007V	4.956V	3.210V	4.890V	689.753	84.774%	2070	39.8	56.18°C	115.12\
10	46.705A	9.100A	9.276A	3.078A	649.572	02.65.53	2102	40.6	45.13°C	0.998
10	11.988V	4.945V	3.200V	4.870V	776.885	83.612%	2190	42.6	58.33°C	115.12\
	52.196A	9.116A	9.305A	3.086A	714.532				46.32°C	0.998
11	11.971V	4.937V	3.191V	4.859V	865.958	82.513%	2190	42.6	60.59°C	115.12\
	0.099A	16.027A	16.004A	0.004A	132.821				42.94°C	0.989
CL1	12.111V	4.977V	3.239V	4.969V	163.185	81.393%	925	20.3	54.04°C	115.13\
	54.119A	1.003A	1.002A	1.001A	662.123				45.35°C	0.998
CL2	11.991V	4.996V	3.242V	4.919V	787.353	84.095%	2190	42.6	58.21°C	115.12\

All data and graphs included in this test report can be used by any individual on the following conditions:

PAGE 7/9

> It should be mentioned that the test results are provided by Cybenetics

> The link to the original test results document should be provided in any case



Anex Corsair CX650M

20-80	20-80W LOAD TESTS								
Test #	12V	5V	3.3V	5VSB	DC/AC (Watts)	Efficiency	Fan Speed (RPM)	Fan Noise (dB[A])	PF/AC Volts
	1.202A	0.491A	0.479A	0.195A	19.671	64.1020/	025	20.2	0.908
1	12.154V	5.075V	3.318V	5.026V	30.649	64.182%	925	20.3	115.12V
	2.428A	0.980A	0.995A	0.396A	39.750	76.2700/	925	20.3	0.950
2	12.149V	5.070V	3.314V	5.019V	52.044	76.378%			115.12V
	3.661A	1.475A	1.507A	0.596A	59.902	01.1570/	925	20.3	0.970
3	12.143V	5.066V	3.310V	5.010V	73.810	81.15/%			115.12V
4	4.876A	1.975A	1.994A	0.797A	79.756	02.0020/	83.963% 925 20.3	20.2	0.979
4	12.137V	5.062V	3.305V	5.004V	94.989	83.903%		20.3	115.12V

RIPPLE MEASUREMENTS Ripple Measurements Corsair CX650M 12V 5V 3.3V 5VSB Test Pass/Fail 10.6 mV 7.8 mV 12.5 mV 10% Load 10.7 mV Pass 20% Load 11.6 mV 8.6 mV 10.8 mV 15.6 mV Pass 30% Load 12.9 mV 9.3 mV 10.2 mV 17.4 mV Pass 40% Load 15.0 mV 10.6 mV 11.8 mV 20.2 mV Pass 50% Load 17.5 mV 12.6 mV 14.5 mV 23.2 mV Pass 60% Load 23.0 mV 13.4 mV 15.7 mV 27.2 mV Pass 70% Load 26.1 mV 14.7 mV 16.1 mV 29.6 mV Pass 80% Load 28.5 mV 16.0 mV 16.6 mV 33.9 mV Pass 90% Load 29.9 mV 16.9 mV 16.8 mV 37.7 mV Pass 100% Load 30.2 mV 18.9 mV 20.9 mV 41.1 mV Pass Pass 110% Load 33.2 mV 19.5 mV 20.7 mV 44.2 mV Crossload 1 11.8 mV 10.4 mV 16.9 mV 12.6 mV Pass Crossload 2 31.6 mV 18.7 mV 19.5 mV 42.0 mV Pass

All data and graphs included in this test report can be used by any individual on the following conditions:

PAGE 8/9

> It should be mentioned that the test results are provided by Cybenetics

> The link to the original test results document should be provided in any case




Anex Corsair CX650M

HOLD-UP TIME & POWER OK SIGNAL (230V)					
Hold-Up Time (ms)	12.56				
AC Loss to PWR_OK Hold Up Time (ms)	9.54				
PWR_OK Inactive to DC Loss Delay (ms)	3.02				





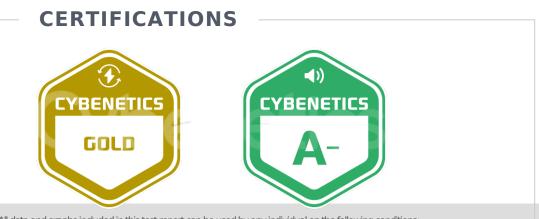

All data and graphs included in this test report can be used by any individual on the following conditions:

- > It should be mentioned that the test results are provided by Cybenetics
- > The link to the original test results document should be provided in any case

PAGE 9/9