

Anex Corsair RM750x (2018)

Lab ID#: 271
Receipt Date: Test Date: -

Report: 20PS271A

Report Date: Nov 1, 2000

DUT INFORMATION					
Brand	Corsair				
Manufacturer (OEM)	Channel Well Technology				
Series	RMx				
Model Number	RM750x (2018)				
Serial Number	17477137000034440118				
DUT Notes	CP-9020179				

DUT SPECIFICATIONS						
Rated Voltage (Vrms)	100-240					
Rated Current (Arms)	10-5					
Rated Frequency (Hz)	47-63					
Rated Power (W)	750					
Туре	ATX12V					
Cooling	135mm Rifle Bearing Fan (NR135L)					
Semi-Passive Operation	1					
Cable Design	Fully Modular					

POWER SPECIFICATIONS								
Rail		3.3V	5V	12V	5VSB	-12V		
Mov. Dower	Amps	25	25 25		3	0.8		
Max. Power Watts		150	150		15	9.6		
Total Max. Power (W)	750	750						

CABLES AND CONNECTORS							
Modular Cables							
Description	Cable Count	Connector Count (Total)	Gauge	In Cable Capacitors			
ATX connector 20+4 pin (600mm)	1	1	18-20AWG	Yes			
4+4 pin EPS12V (650mm)	2	2	18AWG	Yes			
6+2 pin PCle (600mm+150mm)	2	4	18AWG	Yes			
SATA (520mm+110mm+110mm)	3	9	18AWG	No			
4 pin Molex (450mm+100mm+100mm+100mm)	2	8	18AWG	No			
FDD Adapter (+100mm)	1	1	20AWG	No			
AC Power Cord (1430mm) - C13 coupler	1	1	16AWG	-			

All data and graphs included in this test report can be used by any individual on the following conditions:

- > It should be mentioned that the test results are provided by Cybenetics
- > The link to the original test results document should be provided in any case

PAGE 1/9



Anex

Corsair RM750x (2018)

General Data	
Manufacturer (OEM)	сwт
Primary Side	
Transient Filter	4x Y caps, 2x X caps, 2x CM chokes, 1x MOV
Inrush Protection	NTC Thermistor & Relay
Bridge Rectifier(s)	2x GBU1506 (600V, 15A @ 100°C)
APFC MOSFETS	2x Vishay SiHF22N60E (650V, 13A @ 100°C, 0.18Ohm) 1x SPN5003 FET (for reduced no load consumption)
APFC Boost Diode	1x Power Integrations QH08TZ600 (600V, 8A @ 150°C)
Hold-up Cap(s)	2x Nichicon (400V, 1x 470uF, 1x 390uF, 2000h @ 105°C, GG)
Main Switchers	2x Infineon IPA60R190P6 (650V, 12.7A @ 100°C, 0.190 Ohm)
APFC Controller	Champion CM6500UNX
Switching Controller	Champion CM6901X
Fan Controller	PIC16F1503
Topology	Primary side: Half-Bridge & LLC Resonant Controller Secondary side: Synchronous Rectification & DC-DC converters
Secondary Side	
+12V MOSFETS	6x Inte ational Rectifier IRFH7004TRPBF (40V, 164A @ 100°C, 1.4 mOhm)
5V & 3.3V	DC-DC Converters: 6x QM3006D (30V, 57A @ 100°C, 5.5 mOhm) PWM Controller: ANPEC APW7159
Filtering Capacitors	Electrolytics: Nippon Chemi-Con (1-5,000 @ 105°C, KZE), Nippon Chemi-Con (4-10,000 @ 105°C, KY) Polymers: FPCAP
Supervisor IC	Weltrend WT7502 (OVP, UVP, SCP, PG) & LM393G
Fan Model	NR135L (12V, 0.22A, Rifle Bearing)
5VSB Circuit	
Rectifier	ISD04N65A, QM3004D, LS64 10L45 SBR
Step-Down Converter	AME5268
Standby PWM Controller	On-Bright OB5269CP

All data and graphs included in this test report can be used by any individual on the following conditions:

PAGE 2/9

> It should be mentioned that the test results are provided by Cybenetics

> The link to the original test results document should be provided in any case



Anex

Corsair RM750x (2018)

RESULTS	
Temperature Range (°C /°F)	30-32 / 86-89.6
Average Efficiency	88.001
Efficiency With 10W (≤500W) or 2% (>500W) Load -115V	0.000
Average Efficiency 5VSB	77.707
Standby Power Consumption (W) -115V	0.0320703
Standby Power Consumption (W) -230V	0.0474498
Average PF	0.990
ErP Lot 3/6 Ready	/
(EU) No 617/2013 Compliance	/
Avg Noise Output	15.77
Efficiency Rating (ETA)	PLATINUM
Noise Rating (LAMBDA)	A+

TEST EQUIPMENT							
Electronic Loads	Chroma 6314A x2 63123A x6 63102A 63101A	Chroma 63601-5 x2 Chroma 63600-2 63640-80-80 x10 63610-80-20					
AC Sources	Chroma 6530, Chroma 61604						
Power Analyzers	N4L PPA1530, N4L PPA5530						
Oscilloscopes	Picoscope 4444 & 3424, Keysight DSOX3024A, Rigol DS	52072A					
Voltmeter	Keithley 2015 THD 6.5 Digit						
Sound Analyzer	Bruel & Kjaer 2250-L G4						
Microphone	Bruel & Kjaer Type 4955-A, Bruel & Kjaer Type 4189						
Data Loggers	Picoscope TC-08 x2, Labjack U3-HV x2						


All data and graphs included in this test report can be used by any individual on the following conditions:


- > It should be mentioned that the test results are provided by Cybenetics
- > The link to the original test results document should be provided in any case

PAGE 3/9



Anex Corsair RM750x (2018)

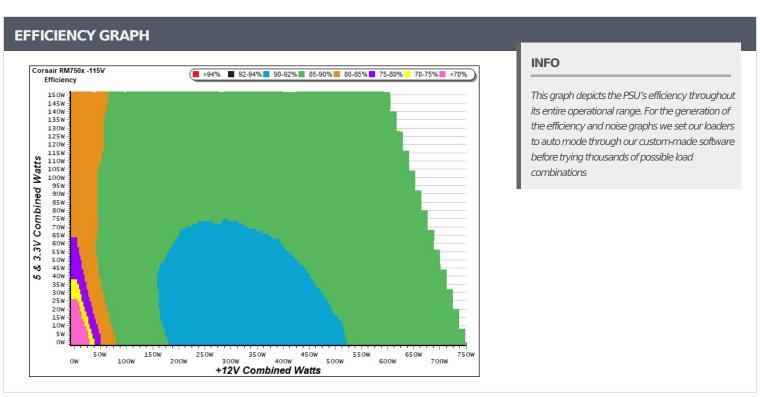

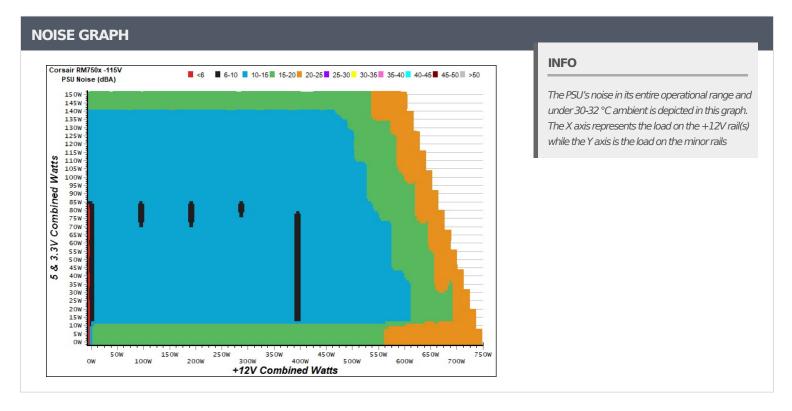

All data and graphs included in this test report can be used by any individual on the following conditions:

- > It should be mentioned that the test results are provided by Cybenetics
- > The link to the original test results document should be provided in any case

PAGE 4/9




Anex

Corsair RM750x (2018)

5VSB EFFICIENCY -115V (ERP LOT 3/6 & CEC)								
Test #	5VSB	DC/AC (Watts)	Efficiency	PF/AC Volts				
1	0.042A	0.211	71.769%	0.030				
Т	5.058V	0.294	71.709%	115.06V				
2	0.087A	0.441	76.430%	0.058				
	5.057V	0.577	70.430%	115.06V				
3	0.542A	2.735	79.413%	0.251				
3	5.044V	3.444	79.413%	115.06V				
4	1.002A	5.040	78.322%	0.337				
4	5.030V	6.435	78.322%	115.05V				
5	1.502A	7.534	77.0050/	0.384				
5	5.017V	9.672	77.895%	115.05V				
6	3.001A	14.929	76.4610/	0.447				
6	4.974V	19.525	76.461%	115.05V				

5VSB EFFICIENCY -230V (ERP LOT 3/6 & CEC)							
Test #	5VSB	DC/AC (Watts)	Efficiency	PF/AC Volts			
1	0.043A	0.217	71 1 400/	0.021			
Т	5.057V	0.305	71.148%	230.21V			
2	0.087A	0.439	72 2000/	0.018			
	5.055V	0.599	73.289%	230.22V			
3	0.542A	2.731	78.319%	0.100			
3	5.042V	3.487	78.319%	230.21V			
4	1.002A	5.035	70 5060/	0.166			
4	5.027V	6.407	78.586%	230.21V			
5	1.501A	7.527	70.1700/	0.221			
5	5.013V	9.628	78.178%	230.21V			
6	3.002A	14.909	77 2120/	0.313			
6	4.967V	19.284	77.313%	230.21V			

VAMPIRE POWER -115V

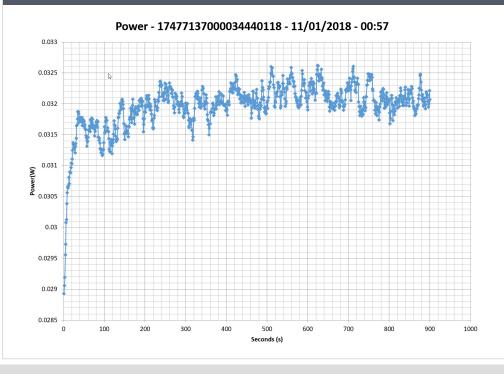

INFO


This graph is generated by the PPA Standby Power Analysis software which takes full control of the power analyzer during the whole procedure. This application features all of the EN50564 & IEC62301 test limits for standby power software testing


All data and graphs included in this test report can be used by any individual on the following conditions:

- > It should be mentioned that the test results are provided by Cybenetics
- > The link to the original test results document should be provided in any case

PAGE 5/9

Anex Corsair RM750x (2018)

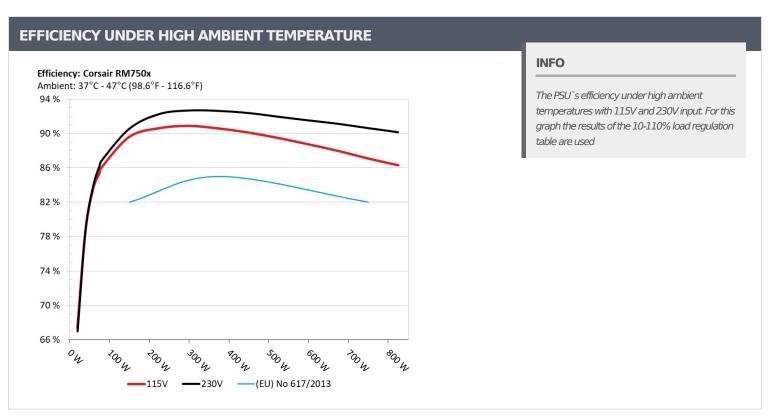

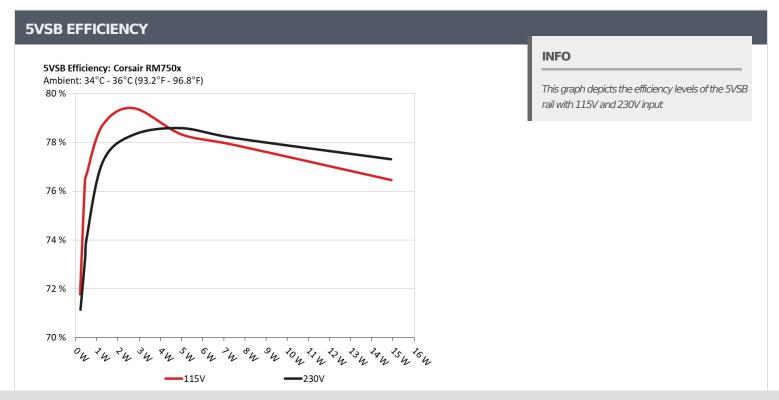

All data and graphs included in this test report can be used by any individual on the following conditions:

- > It should be mentioned that the test results are provided by Cybenetics
- > The link to the original test results document should be provided in any case

PAGE 6/9



Anex

Corsair RM750x (2018)

10-110% LOAD TESTS										
Test #	12V	5V	3.3V	5VSB	DC/AC (Watts)	Efficiency	Fan Speed (RPM)	PSU Noise (dB[A])	Temps (In/Out)	PF/AC Volts
_	4.400A	1.983A	1.984A	0.996A	74.799	05.0.007			46.86°C	0.975
1	12.095V		0	<6.0	39.61°C	115.03V				
_	9.839A	2.968A	2.978A	1.196A	149.770	00 5000/			47.70°C	0.990
2	12.089V	5.036V	3.320V	5.011V	167.113	89.622%	0	<6.0	39.85°C	115.03V
_	15.628A	3.476A	3.495A	1.396A	224.906	00.52204	610	100	41.40°C	0.993
3	12.083V	5.034V	3.316V	5.004V	248.151	90.633%	610	10.2	49.52°C	115.04V
_	21.406A	3.972A	3.979A	1.600A	299.808				41.73°C	0.992
4	12.082V	5.033V	3.315V	4.999V	329.835	90.896%	610	10.2	49.99°C	115.03V
_	26.881A	4.970A	4.977A	1.801A	374.782		90.597% 610	10.2	41.93°C	0.990
5	12.065V	5.028V	3.312V	4.992V	413.681	90.597%			50.43°C	115.02V
_	32.338A	5.968A	5.979A	2.003A	449.703		610	10.2	42.14°C	0.991
6	12.058V	5.026V	3.309V	4.988V	498.998	90.121%			51.24°C	115.02V
_	37.807A	6.969A	6.984A	2.205A	524.708			100	42.52°C	0.993
7	12.051V	5.024V	3.307V	4.983V	586.378	89.483%	610	10.2	52.13°C	115.02V
	43.284A	7.963A	7.989A	2.410A	599.687				44.07°C	0.994
8	12.044V	5.021V	3.304V	4.978V	675.715	88.749%	714	16.5	53.81°C	115.01V
	49.192A	8.470A	8.509A	2.411A	674.788				45.29°C	0.995
9	12.038V	5.020V	3.302V	4.977V	767.003	87.977%	995	26.3	55.22°C	115.03V
	54.853A	8.970A	9.002A	3.021A	749.629				45.81°C	0.995
10	12.031V	5.018V	3.299V	4.960V	860.680	87.097%	1227	33.0	55.96°C	115.02V
	61.108A	8.975A	9.006A	3.022A	824.536				46.55°C	0.996
11	12.025V	5.017V	3.298V	4.958V	955.286	86.313%	1415	36.7	57.25°C	115.02V
	0.102A	18.024A	18.002A	0.004A	151.606				44.89°C	0.991
CL1	12.066V	5.031V	3.315V	5.075V	185.547	81.708%	843	20.4	50.56°C	115.04V
0.0	62.453A	1.001A	1.001A	1.002A	765.342				45.24°C	0.995
CL2	12.041V	5.022V	3.306V	4.999V	873.676	87.600%	1119	30.0	54.39°C	115.01V

All data and graphs included in this test report can be used by any individual on the following conditions:

PAGE 7/9

> It should be mentioned that the test results are provided by Cybenetics

> The link to the original test results document should be provided in any case



Anex

Corsair RM750x (2018)

20-80	20-80W LOAD TESTS										
Test #	12V	5V	3.3V	5VSB	DC/AC (Watts)	Efficiency	Fan Speed (RPM)	PSU Noise (dB[A])	PF/AC Volts		
1	1.210A	0.488A	0.481A	0.196A	19.685	67.2610/		<6.0	0.865		
1	12.098V	5.042V	3.325V	5.036V	29.223	67.361%	0		115.05V		
2	2.444A	0.988A	0.992A	0.396A	39.831	70.6270/	0	<6.0	0.943		
2	12.096V	5.040V	3.323V	5.031V	50.658	78.627%			115.05V		
2	3.675A	1.475A	1.502A	0.596A	59.870	02.7060/			0.970		
3	12.095V	5.040V	3.323V	5.028V	71.524	83.706%	0	<6.0	115.05V		
4	4.898A	1.983A	1.984A	0.796A	79.819	06.0220/		<6.0	0.976		
4	12.094V	5.039V	3.323V	5.023V	92.789	86.022%	0		115.04V		

RIPPLE MEASUREMENTS									
Test	12V	5V	3.3V	5VSB	Pass/Fail				
10% Load	3.1 mV	3.3 mV	6.8 mV	3.3 mV	Pass				
20% Load	3.7 mV	3.2 mV	7.6 mV	3.3 mV	Pass				
30% Load	6.8 mV	3.7 mV	7.4 mV	4.0 mV	Pass				
40% Load	7.7 mV	4.3 mV	7.3 mV	5.0 mV	Pass				
50% Load	7.6 mV	15.7 mV	9.9 mV	15.4 mV	Pass				
60% Load	7.7 mV	4.8 mV	7.5 mV	4.9 mV	Pass				
70% Load	6.8 mV	5.1 mV	8.3 mV	4.9 mV	Pass				
80% Load	6.8 mV	6.4 mV	9.2 mV	6.7 mV	Pass				
90% Load	6.8 mV	6.6 mV	8.7 mV	6.2 mV	Pass				
100% Load	7.5 mV	8.3 mV	11.3 mV	9.7 mV	Pass				
110% Load	7.6 mV	7.2 mV	10.1 mV	7.8 mV	Pass				
Crossload 1	8.5 mV	6.7 mV	8.4 mV	6.1 mV	Pass				
Crossload 2	6.8 mV	5.8 mV	9.8 mV	5.7 mV	Pass				

All data and graphs included in this test report can be used by any individual on the following conditions:

PAGE 8/9

> It should be mentioned that the test results are provided by Cybenetics

> The link to the original test results document should be provided in any case

Anex

Corsair RM750x (2018)

HOLD-UP TIME & POWER OK SIGNAL (230V)	
Hold-Up Time (ms)	23.30
AC Loss to PWR_OK Hold Up Time (ms)	20.40
PWR_OK Inactive to DC Loss Delay (ms)	2.90







All data and graphs included in this test report can be used by any individual on the following conditions:

- > It should be mentioned that the test results are provided by Cybenetics
- > The link to the original test results document should be provided in any case

PAGE 9/9