be quiet!

be quiet! Pure Base 501 Airflow Window

Lab ID BQCAS00149

Report Date: Feb 25, 2025

Scheme: DELTA

□□□□

DELTA is a Cybenetics rating. It is not part of our ISO/IEC 17065 certification schemes and is outside our accreditation.

Level assigned with the Chassis Test Protocol Revision 2.0 limits

This chassis was tested before October 2026 with the earlier test procedure. Its result, 7.8 dB, is the measured pink-noise difference of that evaluation and is unchanged. In October 2026 its level was assigned again with the limits of Chassis Test Protocol Revision 2.0: A+ from 8 dB, A from 5 dB, Standard from 2 dB. The earlier procedure is not identical to the Revision 2.0 procedure, so this result is indicative when compared with chassis tested under Revision 2.0.



Aristeidis Bitziopoulos, Certification Body General Manager

General Information

□□□□


□□ Environment	Hemi-Anechoic Chamber with 6 dB(A) noise floor
Conditions	25(±2) degrees Celsius, 40-50% humidity

Sound Analyzer	Bruel & Kjaer 2270-S G4 & 2250-L G4
Microphone	Bruel & Kjaer Type 4955-A
Mic Calibrator	Bruel & Kjaer Type 4231
Data Logger	Picoscope TC-08


Technical Specifications Table

Brand	be quiet!
Product Name	Pure Base 501 Airflow Window
Type	Midi Tower
Dimensions (LxWxH)	450 x 231 x 463mm
Motherboard Support	Mini-ITX, Micro-ATX, ATX
Removable Motherboard Tray	
Front Cover	
Materials Body	Steel, Plastic, Sound Dampening Material, Tempered Glass
Materials Side Panel	**Left:** Tempered Glass **Right:** Sound-Dampened Steel
Expansion Slots	7x (Horizontal) / 5x (Vertical)
Drive Bays	**5.25":** - **3.5 " :** 2x Internal **2.5" :** 5x Internal
I/O Panel	1x USB 3.2 Gen 2 Type-C, 1x USB 3.2, 1x combo Audio Jack, 1x Power Button, 1x Reset Button
Pre-installed Fan(s)	**Front:** 1x 140mm **Rear:** 1x 140mm
Fan Support	**Front:** 3x 120mm / 2x 140mm **Top:** 2x 120mm / 2x 140mm **Rear:** 1x 120mm / 1x 140mm
Fan Bearing Type	Rifle
Fan Power Connector	4-Pin PWM
LED Controller	
Radiator Support	**Front:** 120 / 140 / 240 / 280 / 360mm **Top:** 120mm / 140mm / 240mm **Rear:** 120mm / 140mm
CPU Cooler Height (Max)	178mm
VGA Length (Max)	368mm
PSU Length (Max)	200mm (180mm with offset HDD cage)
Behind MB Tray Clearance/Cable Management Support	19-23mm
Dust Filters	Top, Front, Bottom
PSU Support	Bottom Mount, ATX
Weight	7.2 kg
Warranty	3-years

Noise Measurements Test Set Up

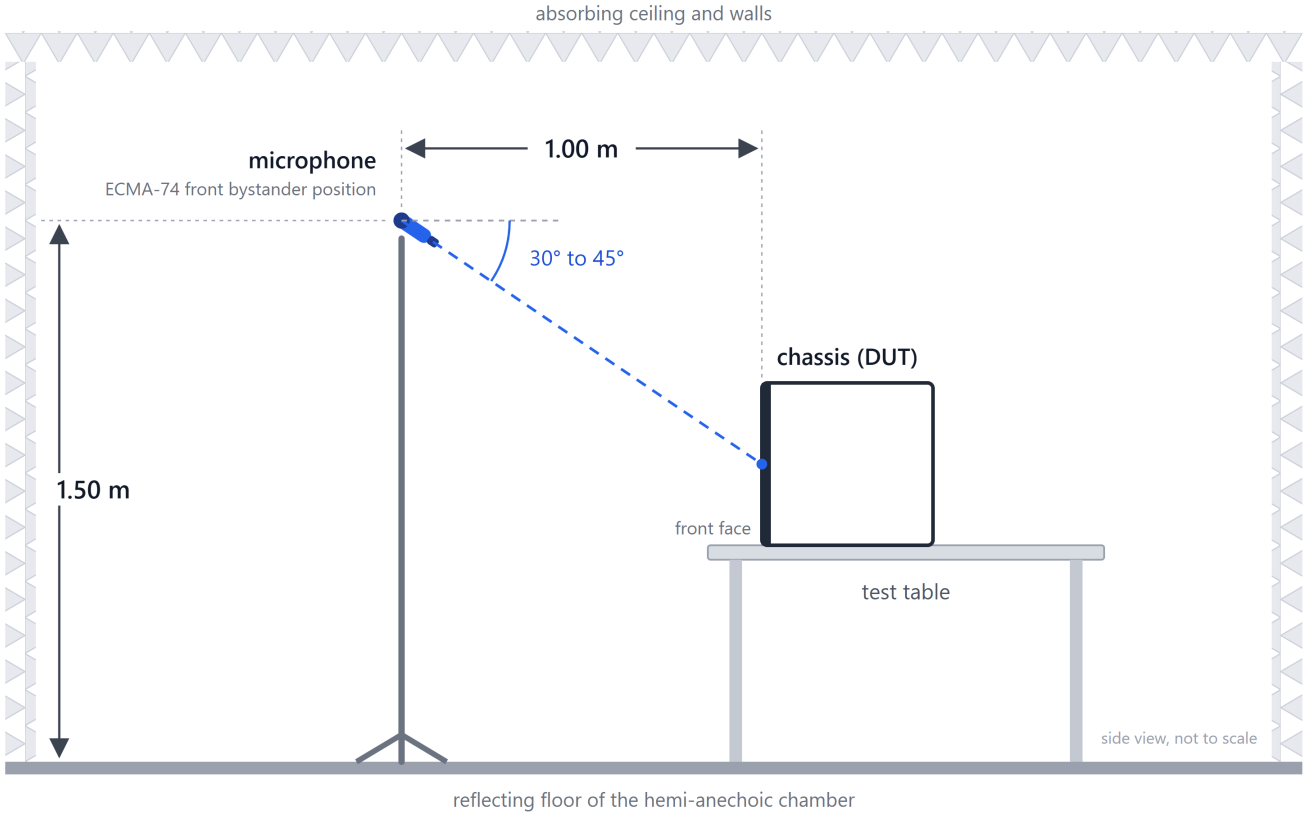


Stock Fan(s) RPM

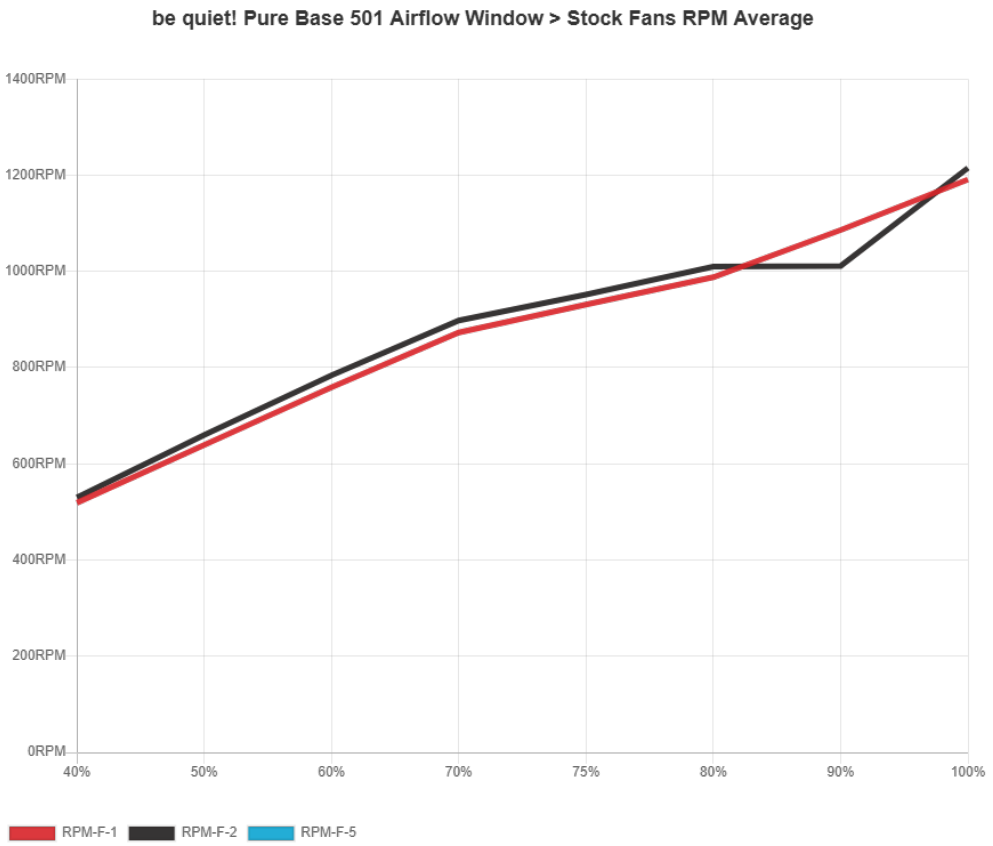

Stock Fan Speed from 40% to 100%


Stock Fan(s) Noise Output – LAeq

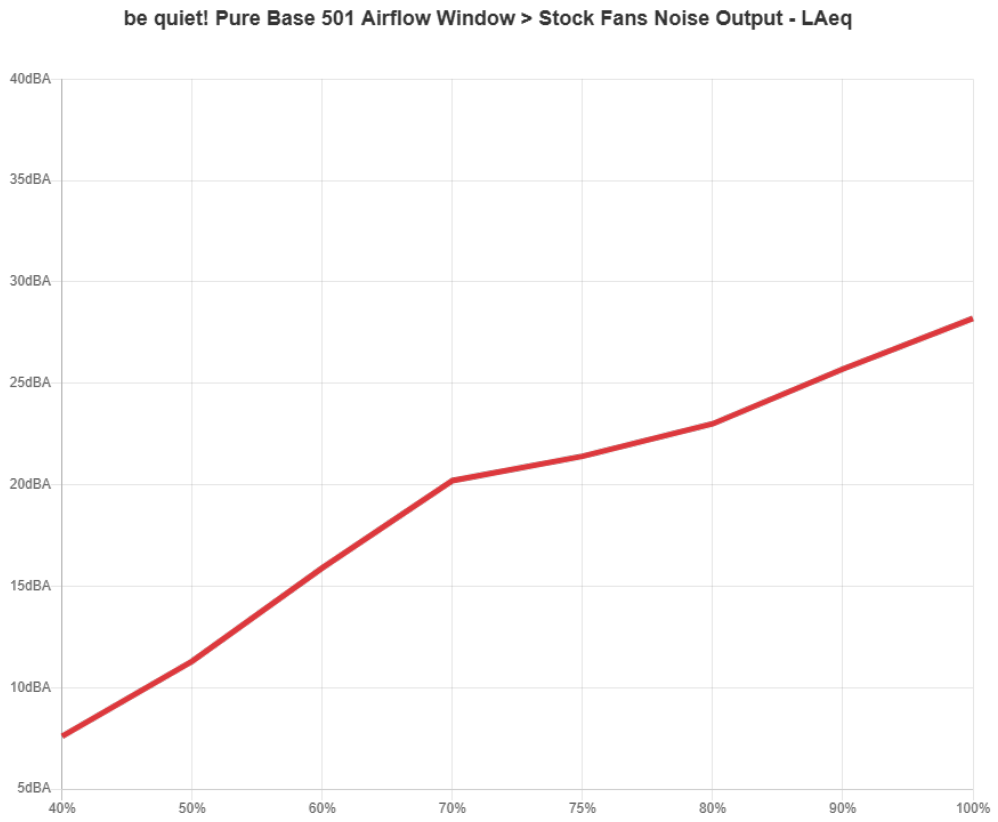


Stock Fan Noise Output from 40% to 100%

Noise Output

LAeq

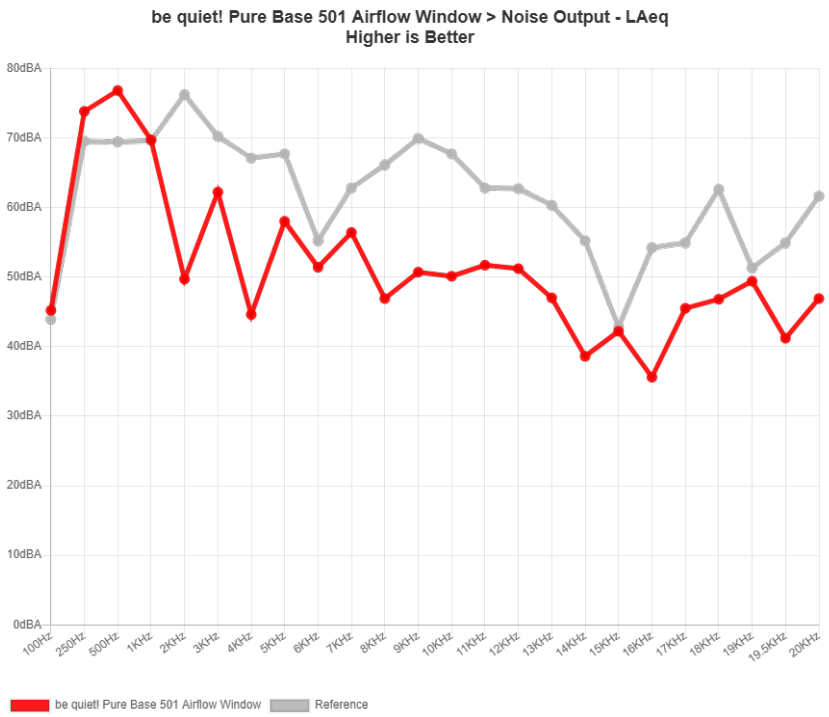


LZeq

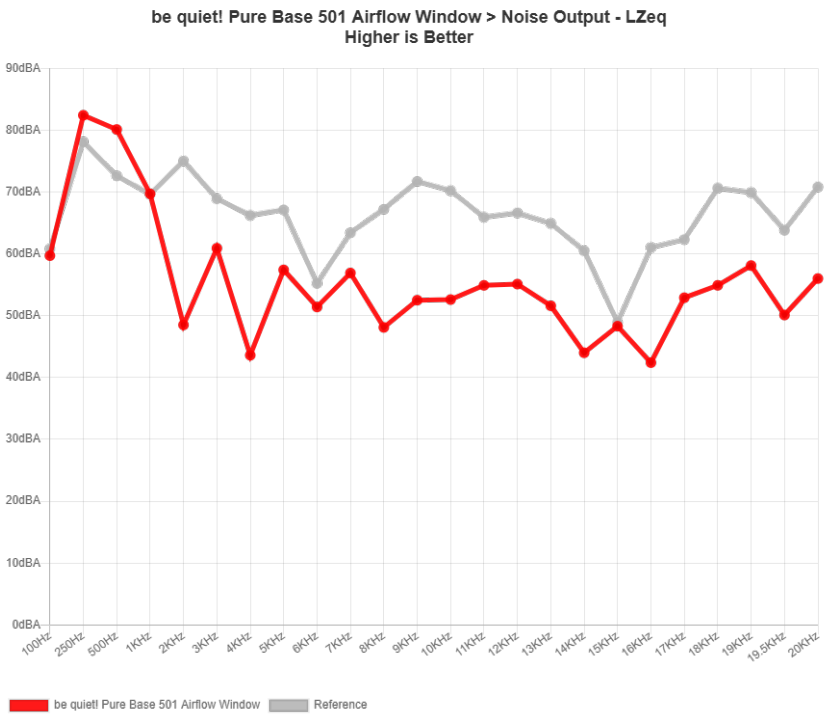

Noise Dampening Performance – Test Tones


LAeq

be quiet! Pure Base 501 Airflow Window > Noise Dampening Performance - LAeq

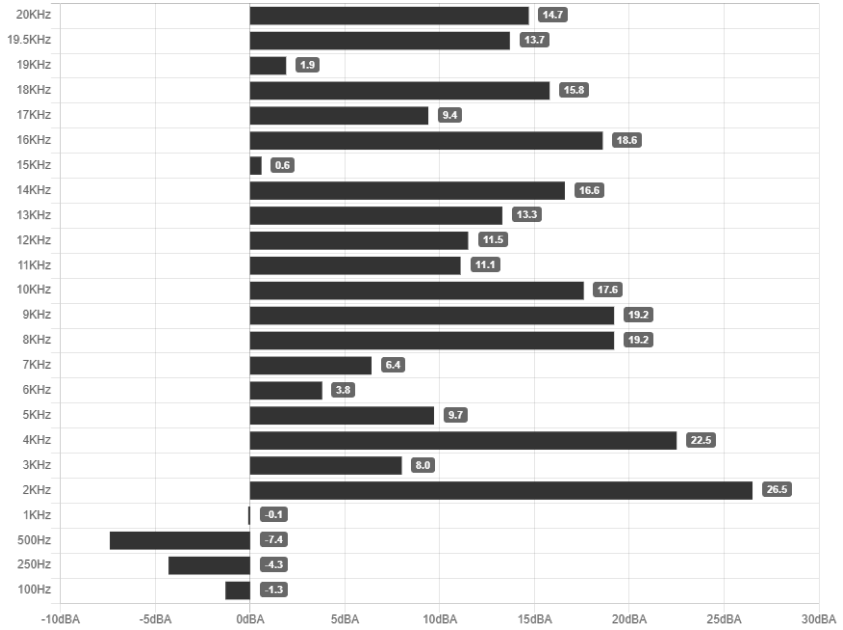


LZeq

be quiet! Pure Base 501 Airflow Window > Noise Dampening Performance - LZeq

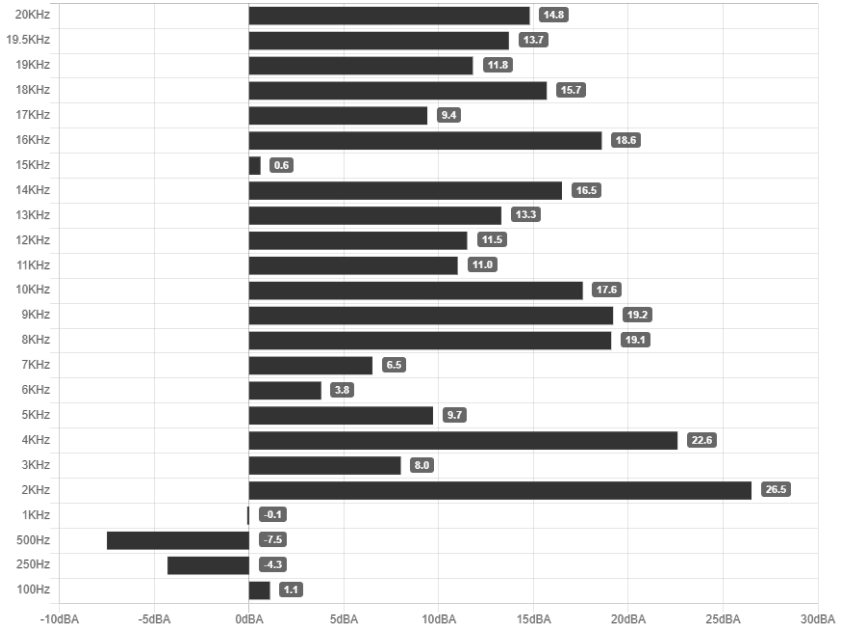


Noise Dampening Performance – Pink & Chirp


LAeq

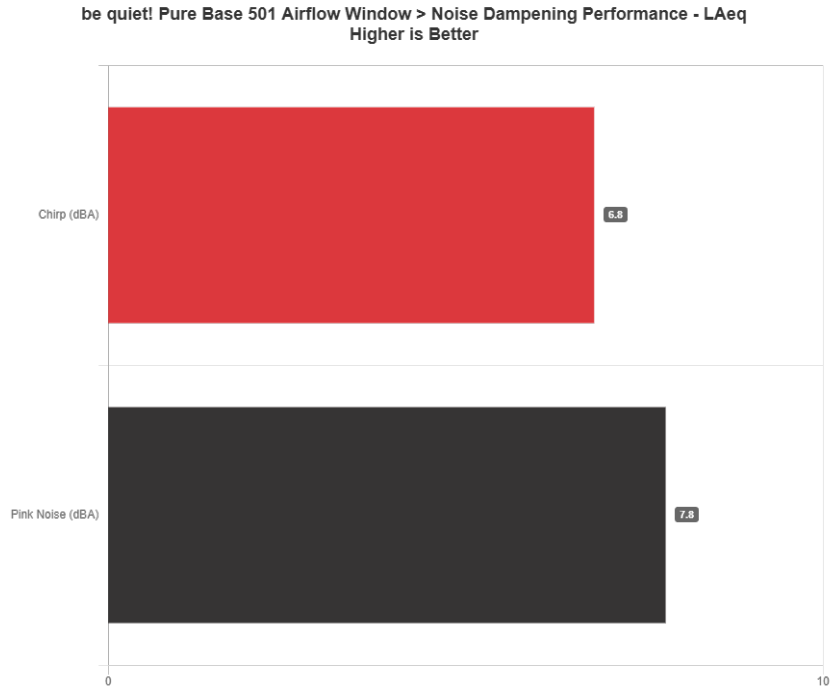

LZeq

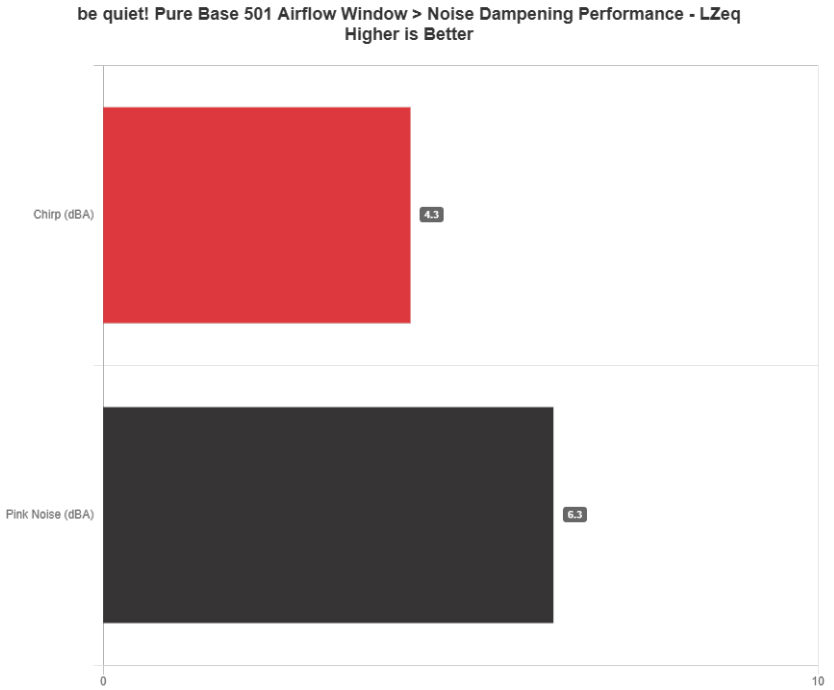

GPU Fan(s) Noise Output – Laeq

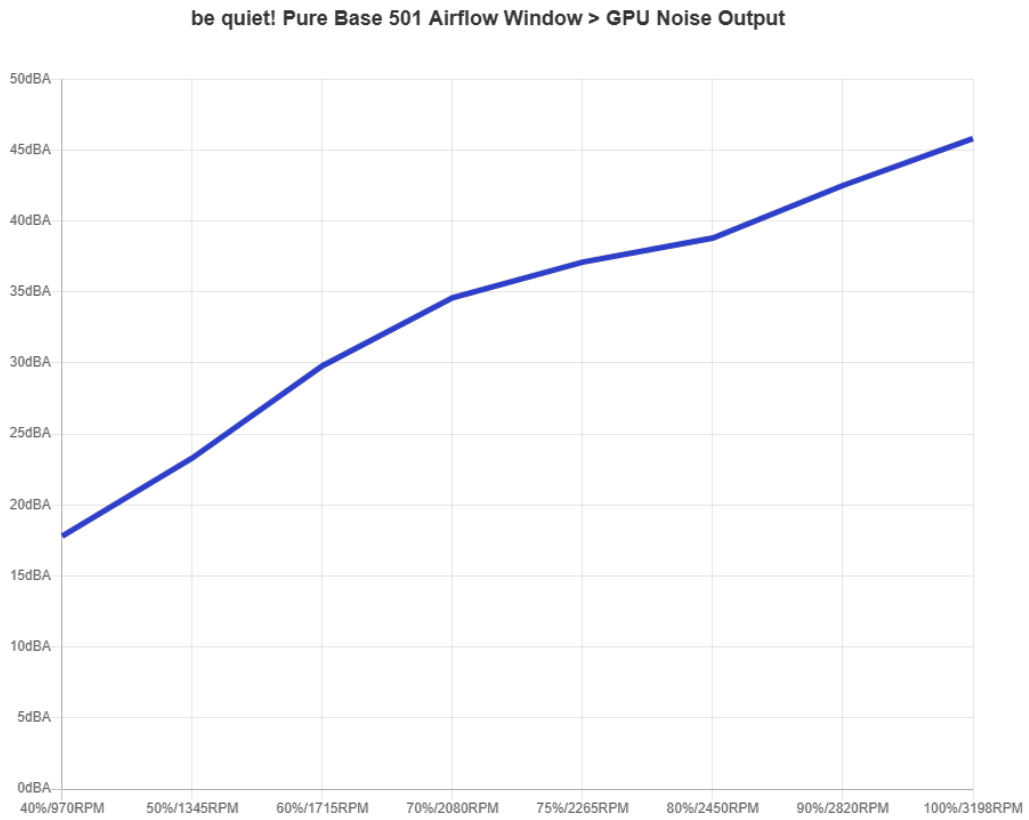

Galax GeForce RTX 4060 EX Noise Output from 40% to 100% Fan Speed

be quiet! Pure Base 501 Airflow Window





Case Photo Case Photo #2

本测试报告中包含的所有数据和图表均可在以下条件下由任何人使用：使用过程需提及测试结果由 Cybenetics提供。
在任何情况下都应提供原始测试结果文档的网站链接

Cybenetics 提供自愿性认证计划：电源方面有 ETA（效率）、 LAMBDA（噪声）与 SAFE （安全与正确运行）；散热产品方面有 DELTA（机箱隔音）与 PHI（风扇风量与静压）

CYBENETICS LTD Syrou 6, Latsia, 2231, Nicosia Cyprus www.cybenetics.com - info@cybenetics.com

Cybenetics - be quiet! Pure Base 501 Airflow Window - Test Report - Page 10 / 10