



Make It Yours.

Cooler Master HAF II 500

Lab ID CMCAS00170

Report Date: Jun 27, 2026

Scheme: DELTA

Noise Rating



DELTA is a Cybenetics rating. It is not part of our ISO/IEC 17065 certification schemes and is outside our accreditation.

Level assigned with the Chassis Test Protocol Revision 2.0 limits

This chassis was tested before October 2026 with the earlier test procedure. Its result, 5.9 dB, is the measured pink-noise difference of that evaluation and is unchanged. In October 2026 its level was assigned again with the limits of Chassis Test Protocol Revision 2.0: A+ from 8 dB, A from 5 dB, Standard from 2 dB. The earlier procedure is not identical to the Revision 2.0 procedure, so this result is indicative when compared with chassis tested under Revision 2.0.

Aristeidis Bitziopoulos, Certification Body General Manager

General Information

Test Equipment

Test Environment	Hemi-Anechoic Chamber with 6 dB(A) noise floor
Conditions	25(±2) degrees Celsius, 40-50% humidity


Sound Analyzer	Bruel & Kjaer 2270-S G4 & 2250-L G4
Microphone	Bruel & Kjaer Type 4955-A
Mic Calibrator	Bruel & Kjaer Type 4231
Data Logger	Picoscope TC-08

Technical Specifications Table


Brand	Cooler Master
Product Name	HAF II 500
Type	Midi Tower
Dimensions (LxWxH)	557 x 262 x 548 mm
Motherboard Support	Mini-ITX, Mini-DTX, Micro-ATX, ATX, CEB, E-ATX (up to 310 mm)
Removable Motherboard Tray	No
Front Cover	Yes (magnetic)
Materials Body	Steel
Materials Side Panel	Left: Tempered Glass Right: Steel
Expansion Slots	8x
Drive Bays	5.25": - 3.5 " : up to 3x Internal 2.5" : up to 6x Internal
I/O Panel	1 x USB 3.2 Gen 2x2 Type-C, 2 x USB 3.2 Gen 1 Type-A, 1x Combo Audio Jack, 1x Power Button, 1x Reset Button
Pre-installed Fan(s)	Front: 2 x Mighty40 F220 (220mm) Rear: 1x Mighty40 V180 (180mm)
Fan Support	Front: 3x 120mm / 3x 140mm / 2x 160mm / 2x 180mm / 2x 220mm Top: 3x 120mm / 3x 140mm / 2x 160mm / 2x 180mm Rear: 1x 180mm
Fan Bearing Type	Dual Ball Bearing
Fan Power Connector	PWM
Fan/ARGB Controller	Yes
Radiator Support	Front: 120mm / 140mm / 240mm / 280mm / 360mm / 360x180 mm (Conditional Support) Top: 120mm / 140mm / 240mm / 280mm / 360mm / 360x180 mm (Conditional Support) Rear: 180mm
CPU Cooler Height (Max)	221 mm (Intel), 220 mm (AMD)
VGA Length (Max)	430 mm (With Mighty40 F220 Fans Installed)

PSU Length (Max)	150 mm (North-South Drive Orientation), 210 mm (East-West Drive Orientation)
Behind MB Tray Clearance/Cable Management Support	15-40mm
Dust Filters	Top, Front, Bottom
PSU Support	Bottom Mount, ATX
Weight	14.2 kg
Warranty	2 Years (Case), 5 Years (Fans)

Noise Measurements Test Set Up

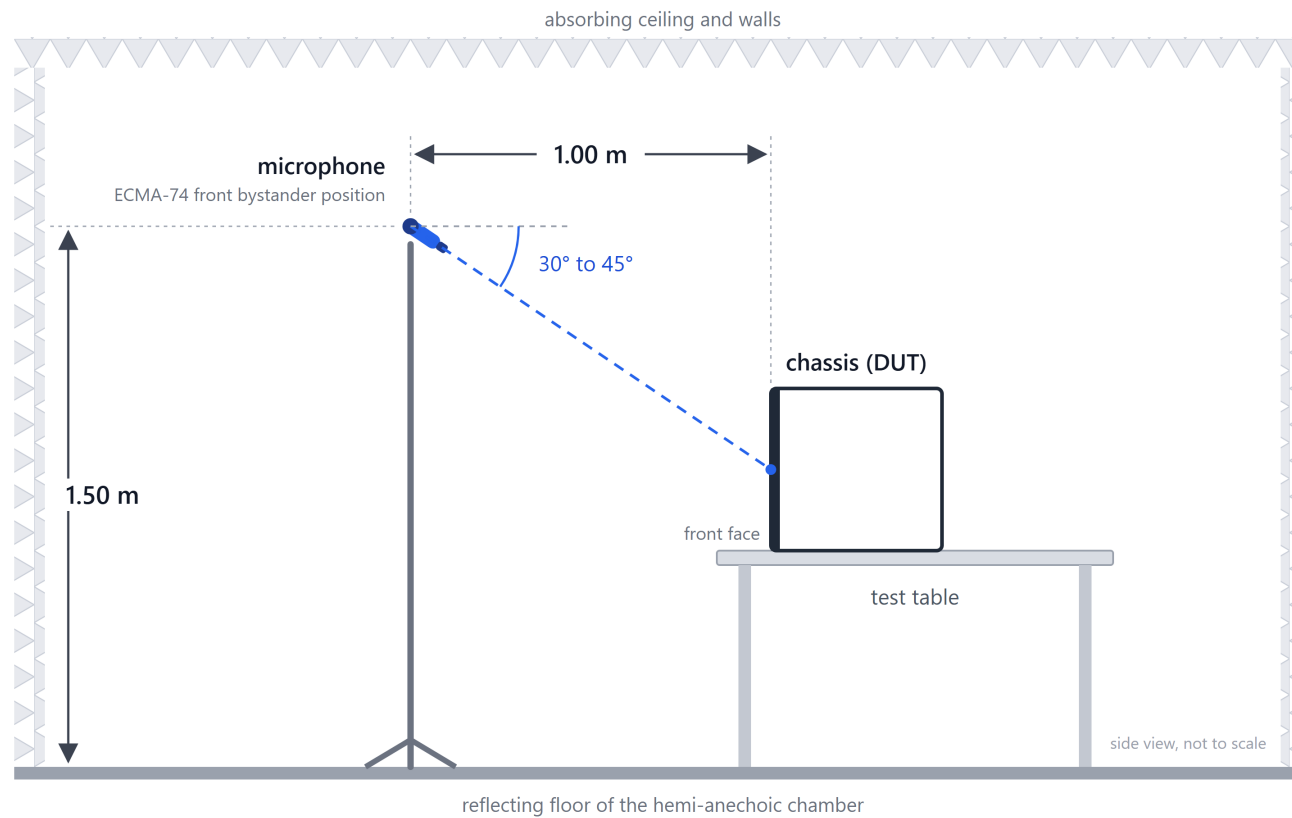

Stock Fan(s) RPM

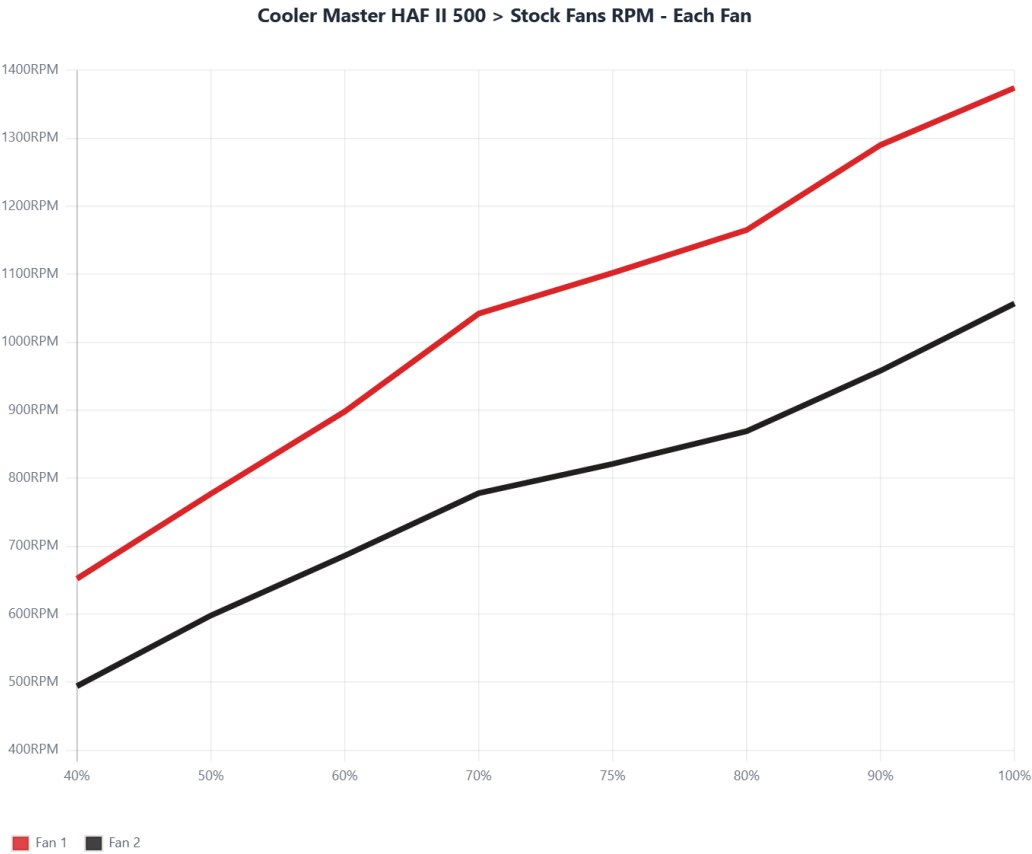


INFO

Stock Fan Speed from 40% to 100%

Stock Fan(s) Noise Output - LAeq

Cooler Master HAF II 500 > Stock Fans Noise Output - LAeq

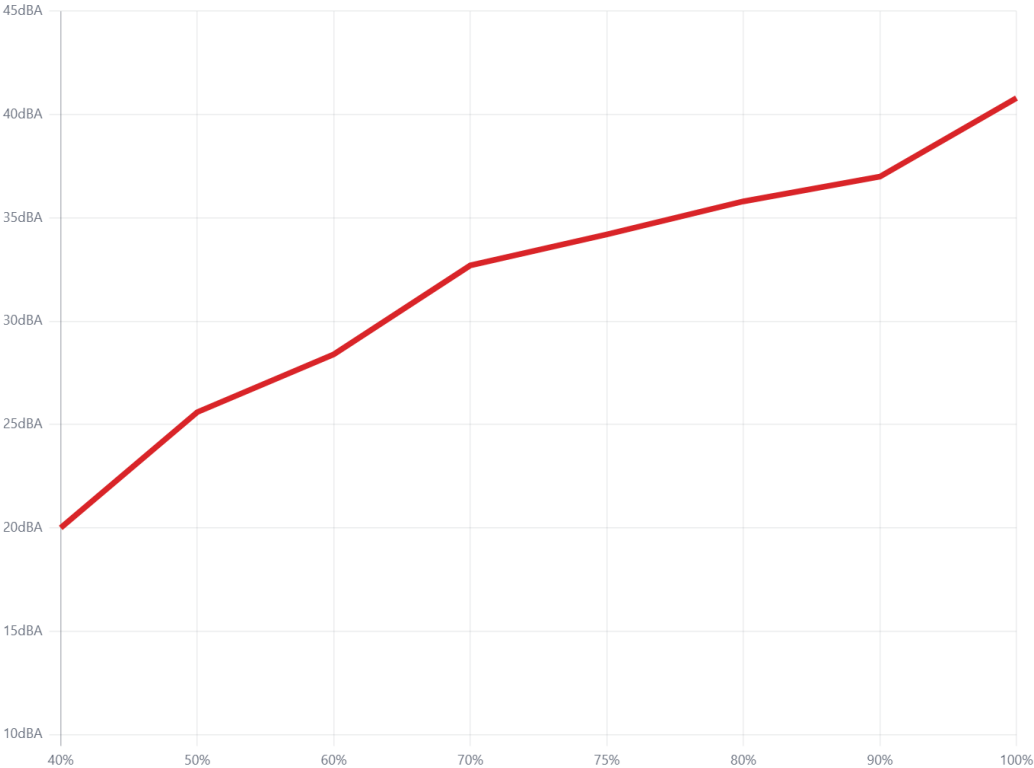



INFO

Stock Fan Noise Output from 40% to 100%

Noise Output

LAeq


LZeq

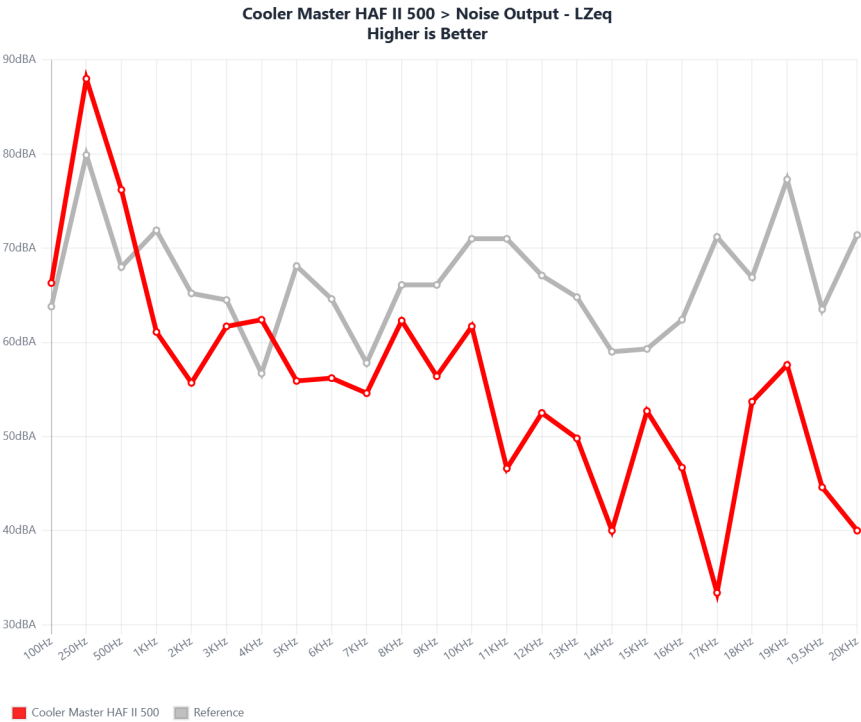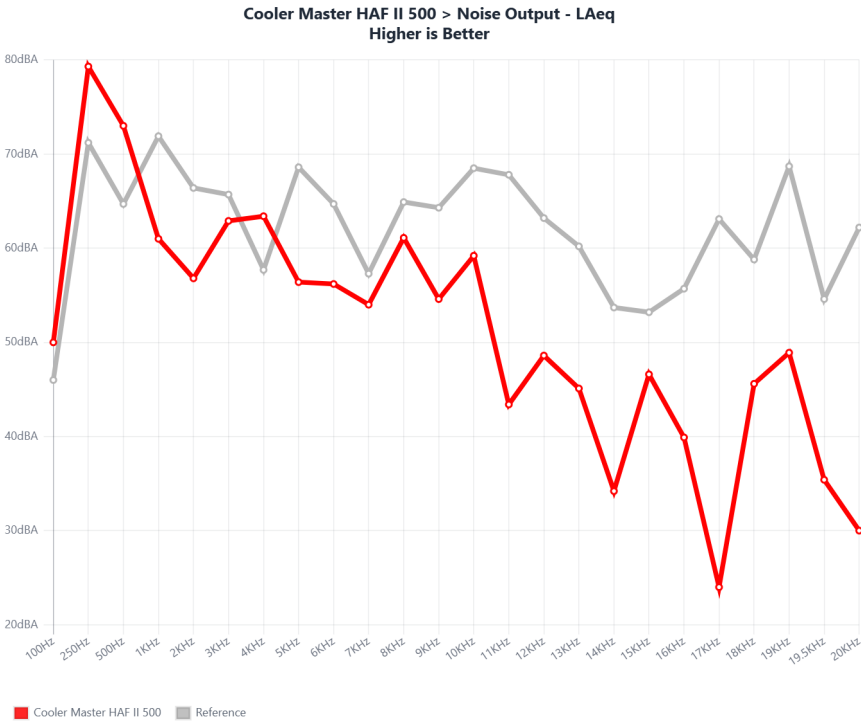

Noise Dampening Performance - Test Tones


LAeq

Cooler Master HAF II 500 > Noise Dampening Performance - LAeq

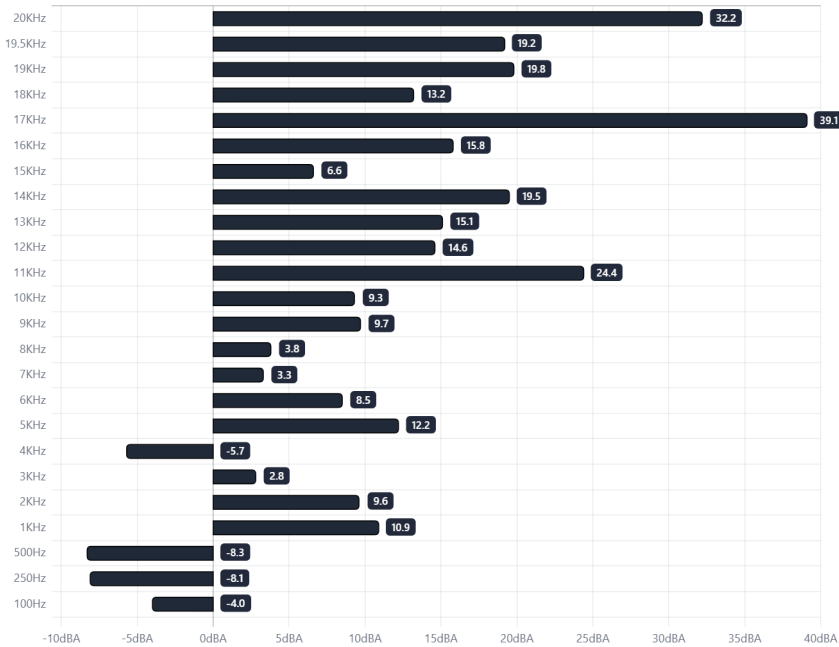

LZeq

Cooler Master HAF II 500 > Noise Dampening Performance - LZeq

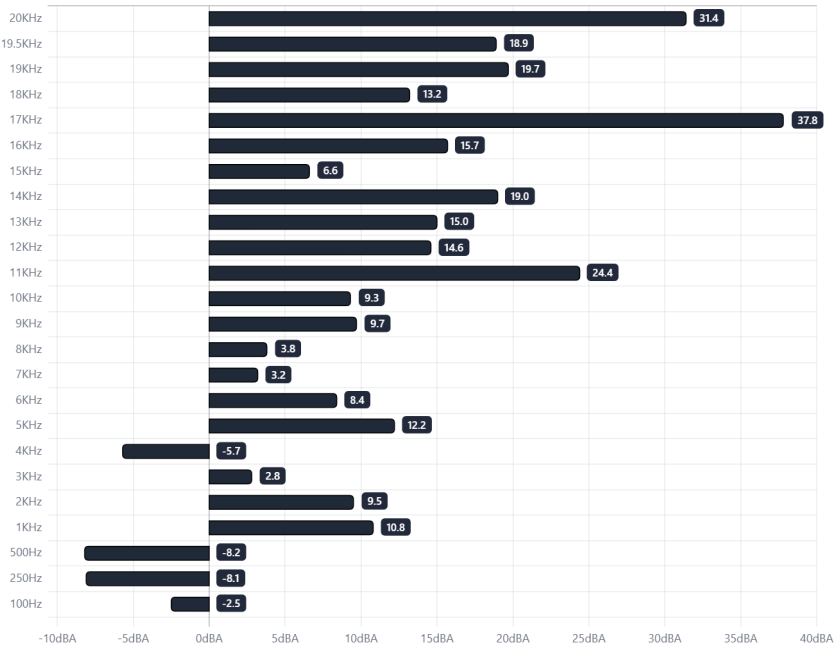


Noise Dampening Performance - Pink & Chirp


LAeq

LZeq

Cooler Master HAF II 500 > Noise Dampening Performance - LAeq
Higher is Better

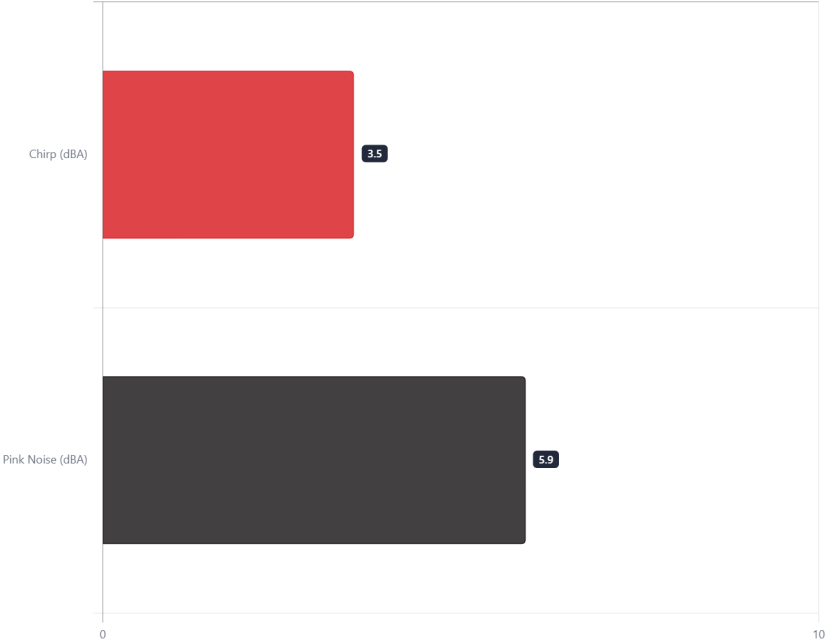


Cooler Master HAF II 500 > Noise Dampening Performance - LZeq
Higher is Better

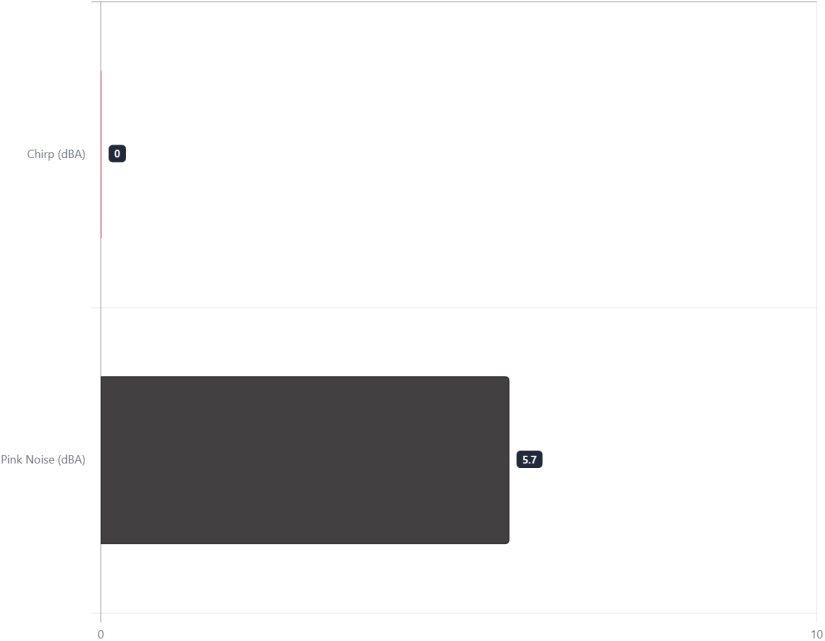

GPU Fan(s) Noise Output - Laeq

Cooler Master HAF II 500 > GPU Noise Output

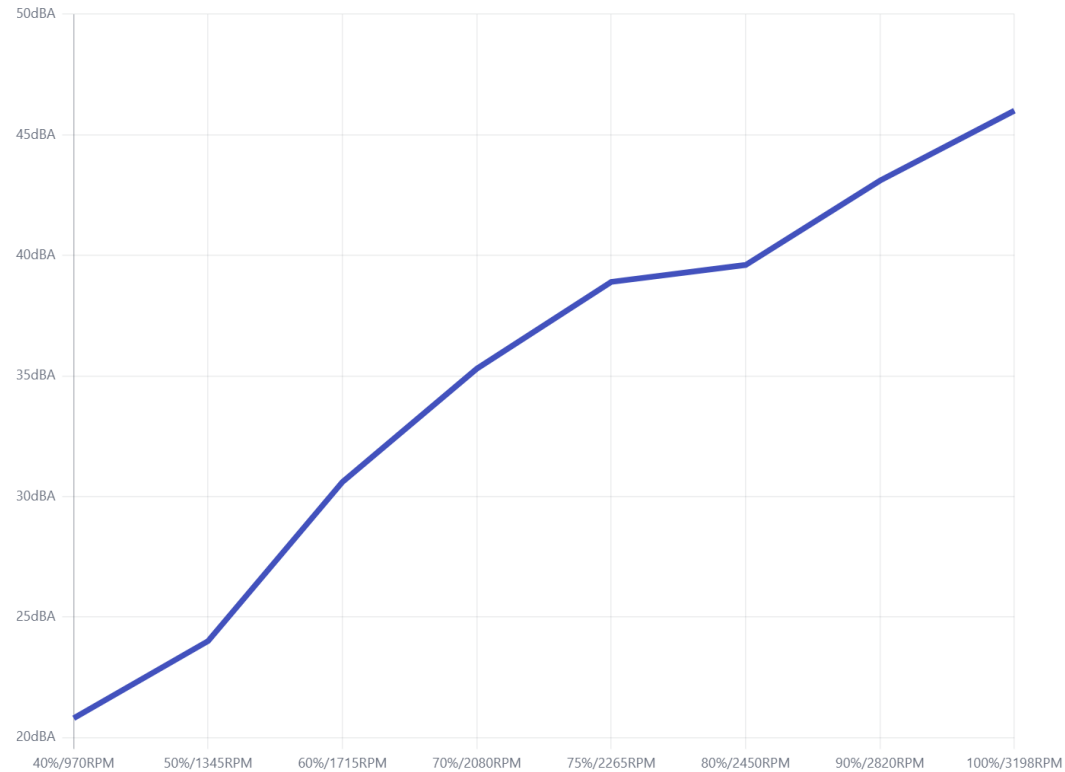

INFO

Galax GeForce RTX 4060 EX Noise Output from 40% to 100% Fan Speed

Cooler Master HAF II 500



Case Photo

All data and graphs included in this test report can be used by any individual on the following conditions:

- › It should be mentioned that the test results are provided by Cybenetics
- › The link to the original test results document should be provided in any case

CYBENETICS LTD Syrou 6, Latsia, 2231, Nicosia Cyprus



Case Photo #2

Cybenetics runs voluntary certification programs for power supplies - ETA for efficiency, LAMBDA for noise and SAFE for safety and correct operation - and for cooling products, with DELTA for chassis soundproofing and PHI for fan airflow and static pressure. THETA rates cooler performance on AMD AM5 and Intel LGA1851 outside ISO 17065 and accreditation scope

www.cybenetics.com - info@cybenetics.com