be quiet!

be quiet! Straight Power 11 550W

Serial Number 281S7420001905

Lab ID 281

Certification ID 25281

Test Result Report ID: 20PS281A

Certificate Issue Date: Jan 25, 2018

Scheme: ETA-EMI PSU

115V



230V




Scheme: LAMBDA PSU

115V



230V





Aristeidis Bitziopoulos, Certification Body General Manager

General Information

Test Equipment

Electronic Loads	Chroma 63601-5 x2 Chroma 63600-2 Chroma 63640-80-80 x10 Chroma 63610-80-20
AC Sources	Chroma 6530, APM SP300VAC4000W-P, GW Instek ASR-3500
Power Analyzers	Rohde & Schwarz HMC8015 & NPA701
Oscilloscopes	Picoscope 4444, Siglent SDS2104X PLUS
Sound Analyzer	Bruel & Kjaer 2270 G4
Microphone	Bruel & Kjaer Type 4955-A
Temperature Logger	Picoscope TC-08
Tachometer	UNI-T UT372
Multimeters	Keysight 34465A
EMI Analyzer	TekBox TBMR-110M-EU
Isolation Transformer	4kVA
UPS	FSP Champ Tower 3kVA, CyberPower OLS3000E 3kVA
Testing Methodology	Cybenetics PSU Test Protocol

DUT Information(Non-accredited measurements)

Product Identification Details	
Brand	be quiet!
Model	Straight Power 11 550W
OEM/ODM	FSP
Serial Number	281S7420001905
Product Specifications	
Manufacturer-Provided Information	
Rated Voltage (Vrms)	100-240
Rated Current (Arms)	8-4
Rated Frequency (Hz)	50-60

Rated Power (W)	550
Operating Temperature (Continuous Full Load) (°C)	
Type	ATX12V
Cable Design	Fully Modular
Warranty	-
Cybenetics Measurements	
Dimensions (W x H x D)	
Weight	
Cooling	135mm Fluid Dynamic Bearing Fan (SIW3-13525-HF-26)
Semi-Passive Operation	✗
Cybenetics Testing Information	
Lab ID	281
Date of receipt	Jan 18, 2018
Testing Date	Jan 23, 2018
Report Issued Date	Jan 25, 2018
Engineer Name	-
Authorized By the Laboratory Technical Manager	Aristeidis Bitziopoulos
Signature	

Cables and Connectors(Non-accredited measurements)

Modular Cables				
Description	Cable Count	Connector Count (Total)	Gauge	In Cable Capacitors
ATX connector 20+4 pin (600mm)	1	1	18-22AWG	No
4+4 pin EPS12V (700mm)	1	1	16AWG	No
6+2 pin PCIe (600mm)	2	2	18AWG	No
SATA (550mm+150mm+150mm)	1	3	18AWG	No
SATA (550mm+150mm+150mm+150mm)	1	4	18AWG	No
SATA (550mm+150mm+150mm) / 4 pin Molex (+150mm)	1	3 / 1	18AWG	No
SATA (550mm+150mm) / 4 pin Molex (+150mm+150mm)	1	2 / 2	18AWG	No
FDD Adapter (+150mm)	1	1	22AWG	No

AC Power Cord (1380mm) - C13 coupler	1	1	18AWG	-

Power Specifications

Rail		3.3V	5V	12V1	12V2	12V3	12V4	5VSB	-12V
Max. Power	Amps	24	24	18	18	20	20	3	0.3
				45.8					
	Watts	130		549.6				15	3.6
Total Max. Power (W)		550							

Test Results

Temperature & Compliance Info

Temperature Range (°C /°F)	28-32 / 82.4-89.6
ErP Lot 3/6 Ready	✓
(EU) No 617/2013 Compliance	✓

Performance Summary

115V

Accredited	
Average Efficiency (>1450 load combinations)	88.981%
Average Noise Output (>1450 Load Combinations)	13.54dBA
Average PF (>1450 Load Combinations)	0.993
Efficiency With 10W (≤500W) or 2% (>500W) Load	-
Standby Power Consumption	0.0344W
Non-Accredited	
12V Ripple (Full Load)	22.22mV
5V Ripple (Full Load)	8.14mV
3.3V Ripple (Full Load)	14.87mV
5VSB Ripple (Full Load)	18.98mV

12V Load Regulation	0.67%
5V Load Regulation	1.99%
3.3V Load Regulation	2.99%
5VSB Load Regulation	3.42%
Inrush Current	29.212A

230V

Accredited		
Average Efficiency (>1450 load combinations)	91.159%	
Average Noise Output (>1450 Load Combinations)	13.27dBA	
Average PF (>1450 Load Combinations)	0.967	
Efficiency With 10W (≤500W) or 2% (>500W) Load	-	
Standby Power Consumption	0.0888W	
Non-Accredited		
12V Ripple (Full Load)	22.67mV	
5V Ripple (Full Load)	7.19mV	
3.3V Ripple (Full Load)	13.34mV	
5VSB Ripple (Full Load)	18.71mV	
12V Load Regulation	0.68%	
5V Load Regulation	1.95%	
3.3V Load Regulation	2.96%	
5VSB Load Regulation	3.44%	
Inrush Current	44.624A	
Hold-Up Time & PWR_OK Signal	16.20ms	
AC Loss to PWR_OK Hold Up Time	14.60ms	
PWR_OK Inactive to DC Loss Delay	1.60ms	
OPP (0.00°C / 0.00°C)	-	-


Hold-Up Time & PWR_OK Signal

Hold-Up Time (ms)	16.2
AC Loss to PWR_OK Hold Up Time (ms)	14.6
PWR_OK Inactive to DC Loss Delay (ms)	1.6


Vampire Power

Graphs

115V

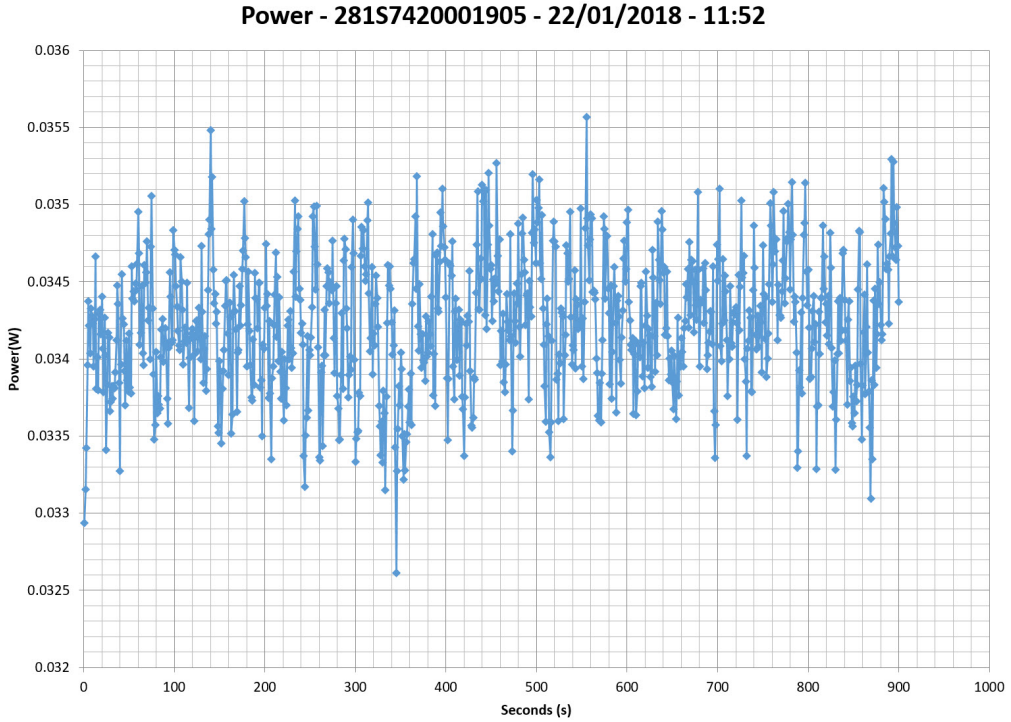


230V

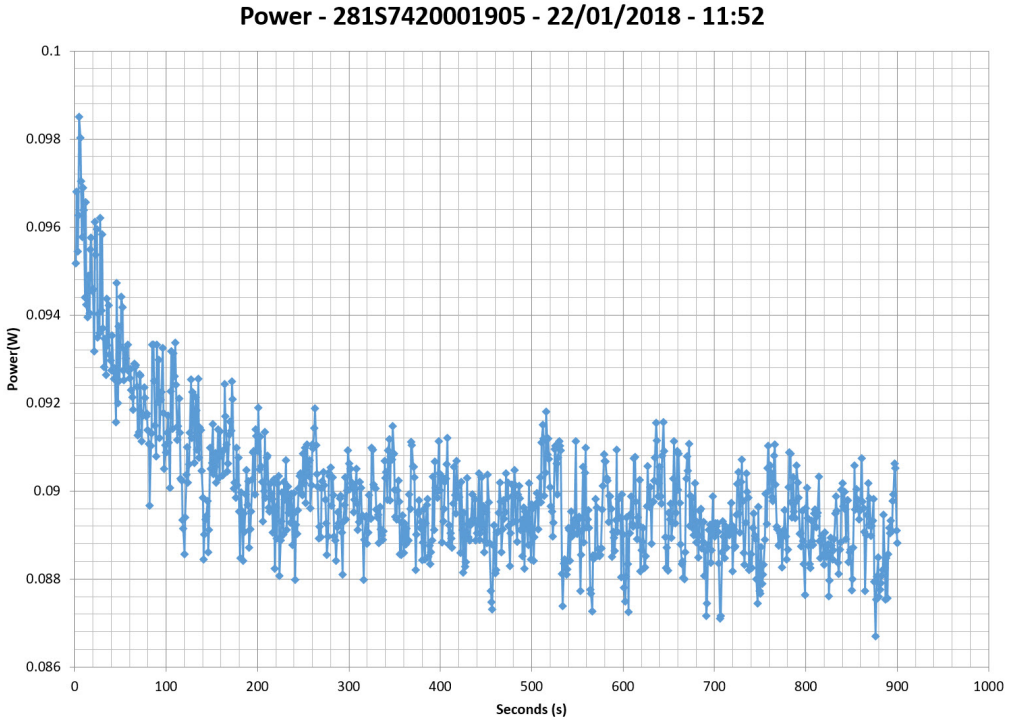

Efficiency Graph


115V

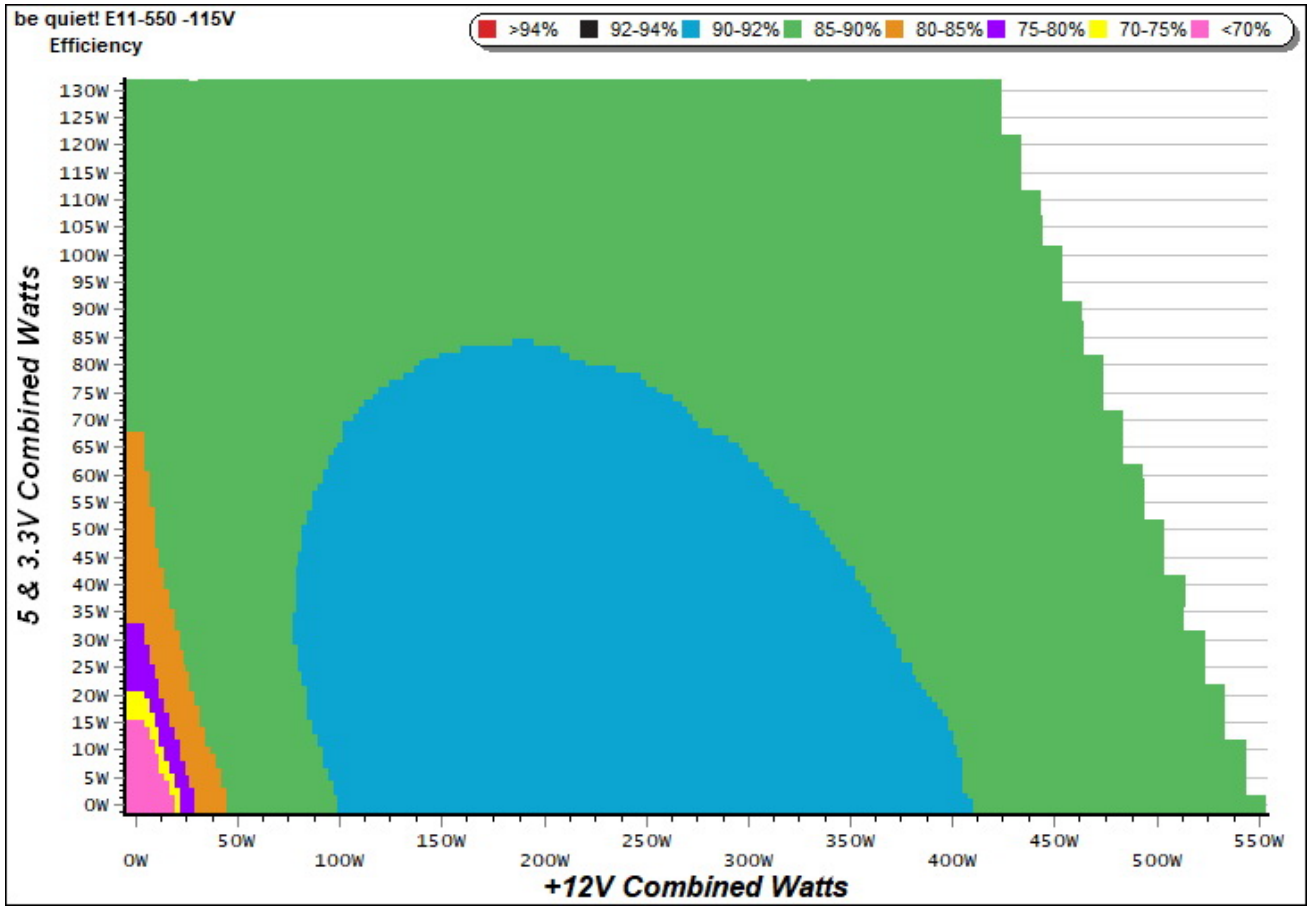

INFO

This graph depicts the PSU`s efficiency throughout its entire operational range. For the generation of the efficiency and noise graphs we set our loaders to auto mode through our custom-made software before trying thousands of possible load combinations.

230V

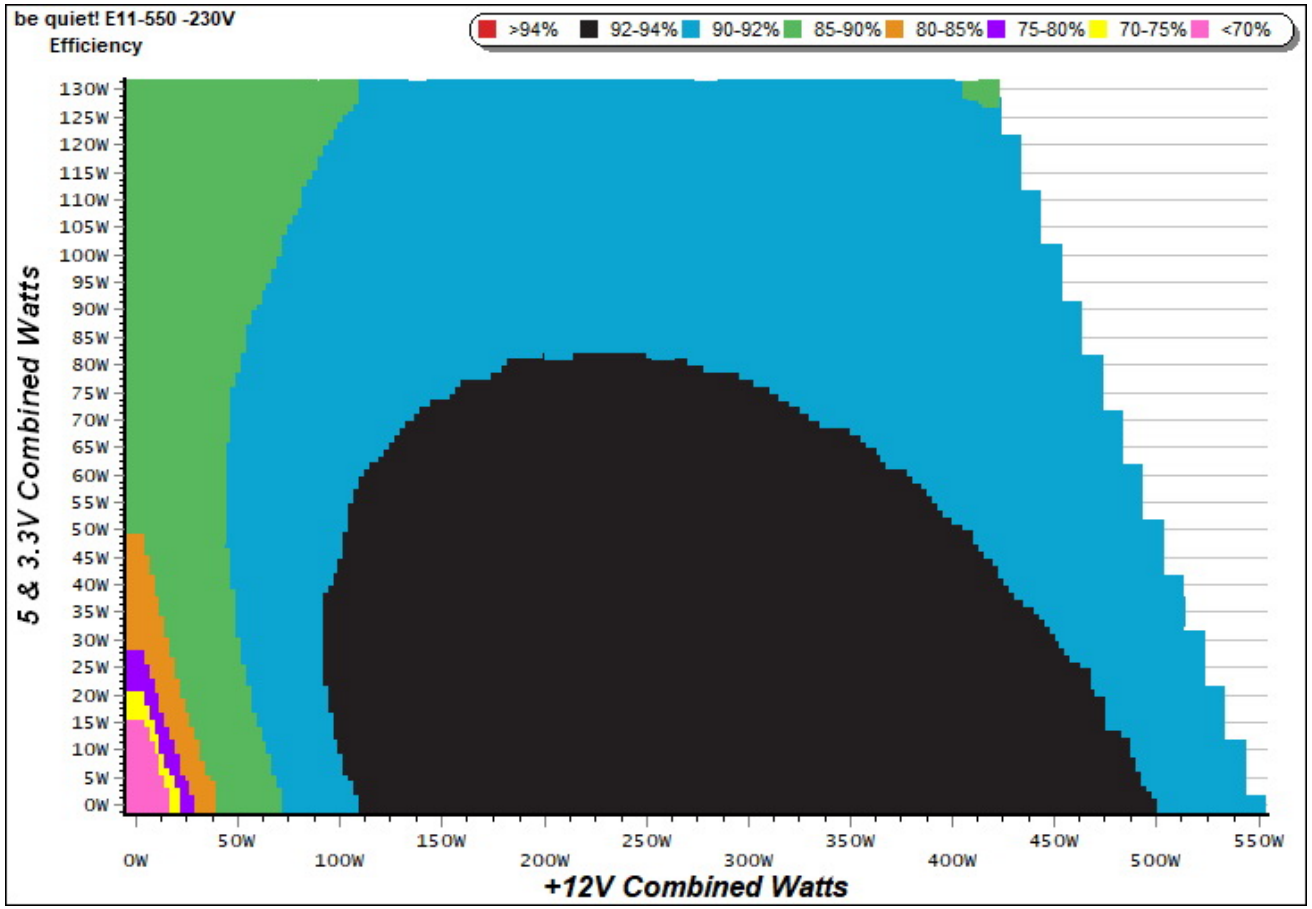


INFO

This graph depicts the PSU`s efficiency throughout its entire operational range. For the generation of the efficiency and noise graphs we set our loaders to auto mode through our custom-made software before trying thousands of possible load combinations.

Noise Graph


115V

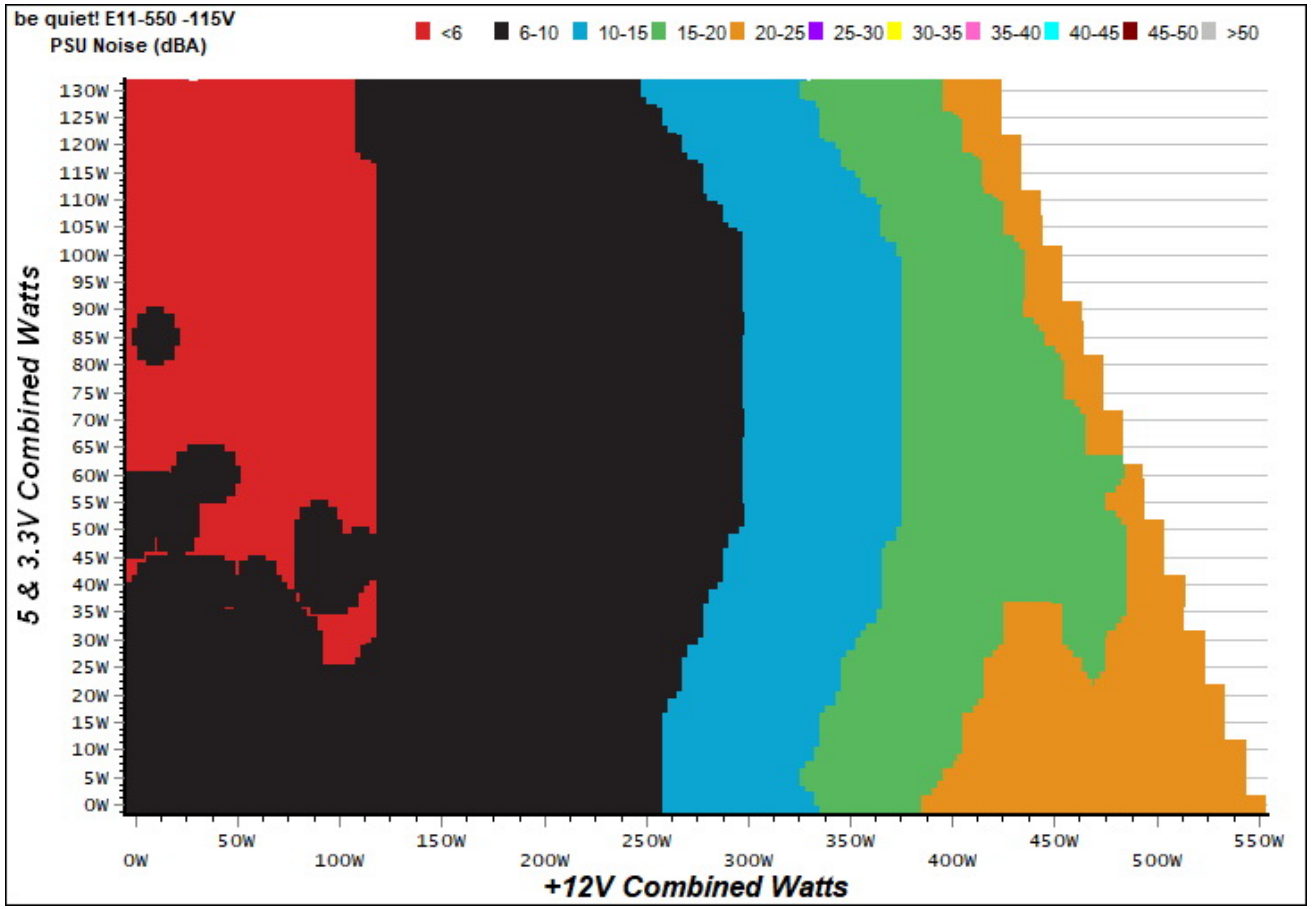

INFO

The PSU`s noise in its entire operational range and under 30-32 °C ambient is depicted in this graph. The X axis represents the load on the +12V rail(s) while the Y axis is the load on the minor rails.

230V

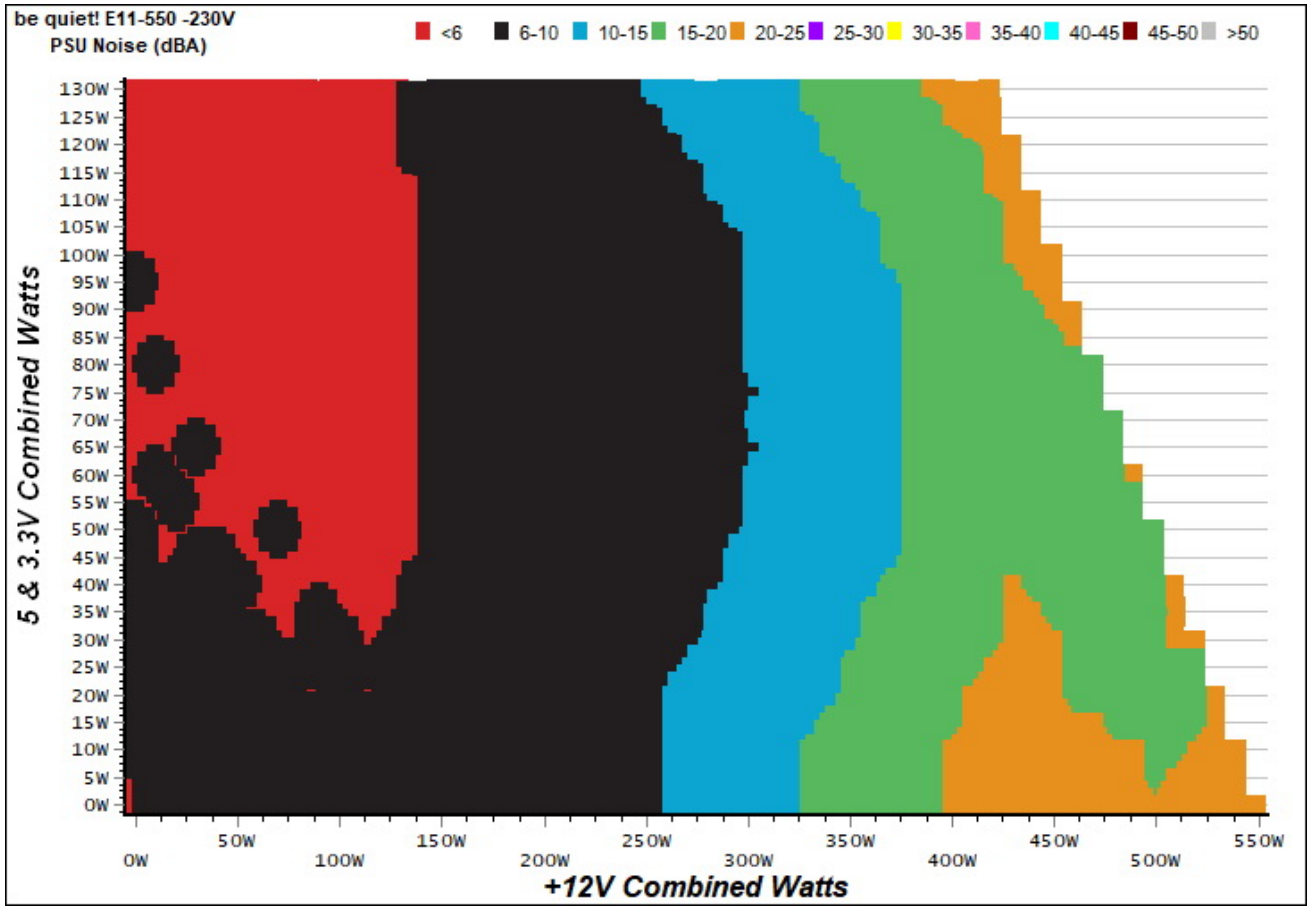


INFO

The PSU`s noise in its entire operational range and under 30-32 °C ambient is depicted in this graph. The X axis represents the load on the +12V rail(s) while the Y axis is the load on the minor rails.

Indicative Performance


Efficiency under high ambient temperature

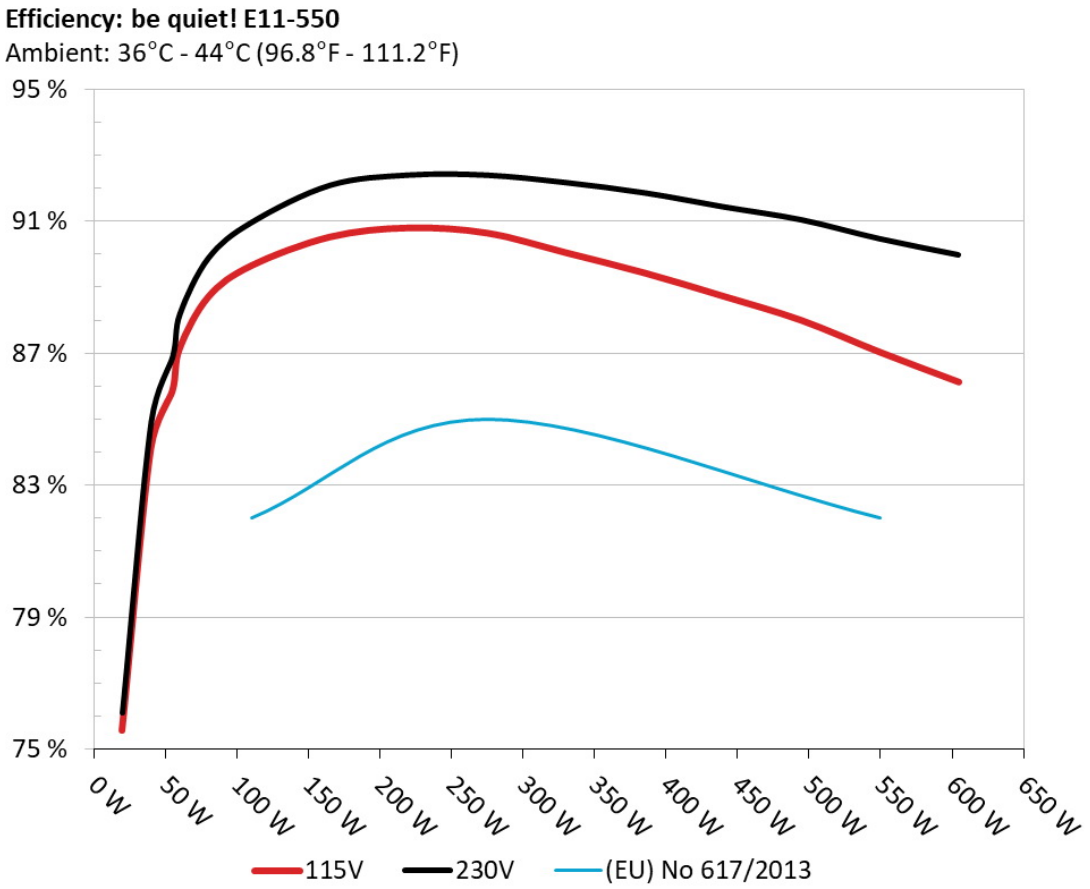

INFO

The PSU`s efficiency under high ambient temperatures with 115V and 230V input. For this graph the results of the 10-110% load regulation table are used.

5VSB Efficiency

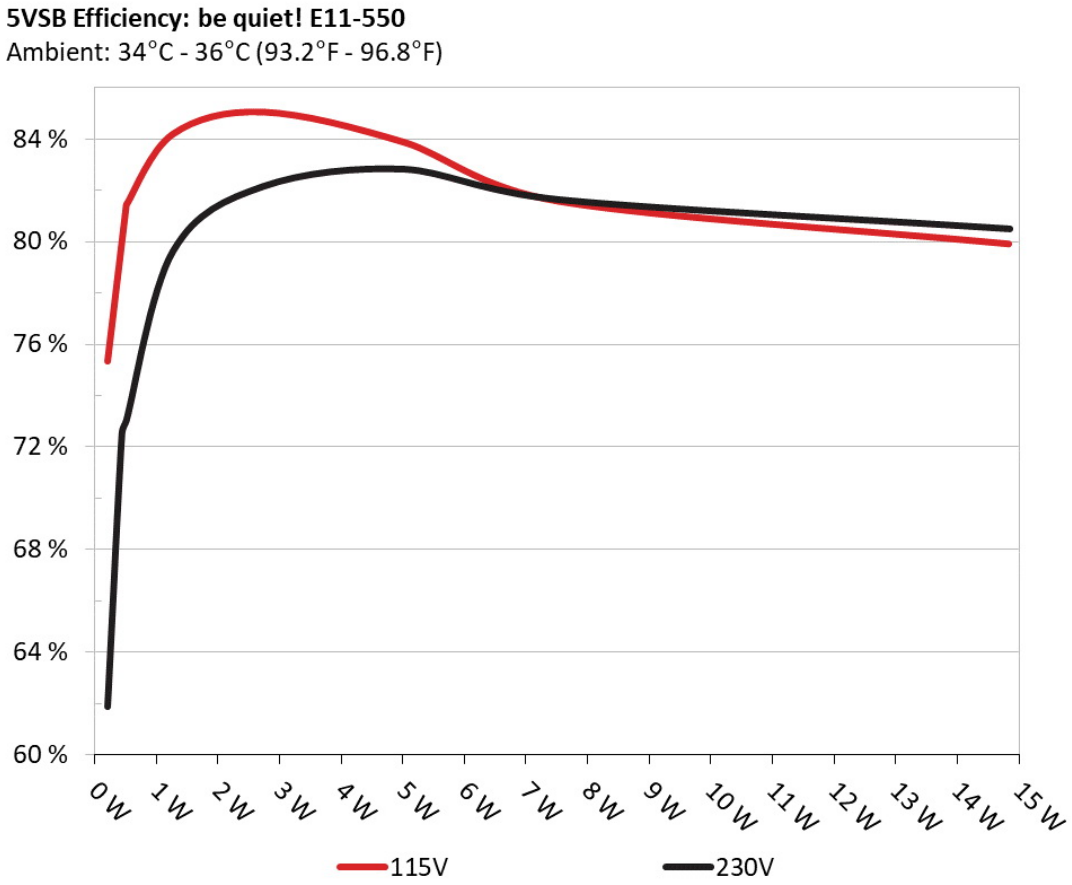

INFO

This graph depicts the efficiency levels of the 5VSB rail with 115V and 230V input.

5VSB Efficiency (ERP LOT 3/6 & CEC)

115V

Test #	5VSB	DC/AC (Watts)	Efficiency	PF/AC Volts
1	0.042A	0.211	75.357%	0.040
	5.069V	0.280		115.04V
2	0.087A	0.443	81.434%	0.075
	5.068V	0.544		115.05V
3	0.542A	2.736	85.048%	0.295
	5.045V	3.217		115.04V
4	1.002A	5.039	83.858%	0.378
	5.028V	6.009		115.04V
5	1.502A	7.524	81.579%	0.423
	5.010V	9.223		115.04V
6	3.002A	14.836	79.918%	0.480
	4.942V	18.564		115.04V

230V

Test #	5VSB	DC/AC (Watts)	Efficiency	PF/AC Volts
1	0.042A	0.211	61.877%	0.015
	5.070V	0.341		230.17V
2	0.087A	0.443	72.504%	0.026
	5.069V	0.611		230.17V
3	0.542A	2.736	82.137%	0.129
	5.047V	3.331		230.16V
4	1.002A	5.033	82.807%	0.206
	5.023V	6.078		230.17V
5	1.502A	7.529	81.624%	0.266
	5.013V	9.224		230.17V
6	3.002A	14.847	80.485%	0.355
	4.946V	18.447		230.17V

Supplementary Tests (For Reference)

Typical Load Tests

115V

Test #	12V	5V	3.3V	5VSB	DC/AC (Watts)	Efficiency	Fan Speed (RPM)	PSU Noise (dB[A])	Temps (In/Out)	PF/AC Volts
1	2.766A	1.994A	1.956A	0.996A	54.835	85.847%	240	6.0	37.91°C	0.969
	12.013V	5.023V	3.369V	5.021V	63.875				45.92°C	115.06V
2	6.576A	2.990A	2.945A	1.196A	109.806	89.636%	240	6.0	38.12°C	0.990
	12.004V	5.013V	3.359V	5.005V	122.502				46.34°C	115.03V
3	10.741A	3.497A	3.463A	1.401A	164.945	90.510%	240	6.0	39.03°C	0.993
	11.996V	5.004V	3.349V	4.996V	182.239				47.56°C	115.02V
4	14.900A	4.005A	3.950A	1.605A	219.806	90.786%	350	7.7	39.96°C	0.995
	11.988V	4.993V	3.339V	4.983V	242.114				48.90°C	115.02V
5	18.727A	5.014A	4.954A	1.810A	274.789	90.630%	490	11.6	40.19°C	0.996
	11.979V	4.981V	3.329V	4.968V	303.199				49.42°C	115.03V
6	22.556A	6.036A	5.967A	2.016A	329.718	90.037%	632	13.3	40.91°C	0.997
	11.968V	4.969V	3.316V	4.954V	366.203				50.41°C	115.03V
7	26.389A	7.054A	6.985A	2.226A	384.671	89.424%	800	18.1	41.53°C	0.997
	11.960V	4.959V	3.305V	4.938V	430.164				51.33°C	115.02V
8	30.235A	8.089A	8.014A	2.435A	439.679	88.720%	968	23.3	42.44°C	0.997
	11.949V	4.948V	3.293V	4.922V	495.582				52.99°C	115.06V
9	34.512A	8.608A	8.558A	2.440A	494.746	87.982%	1133	27.7	43.19°C	0.997
	11.942V	4.938V	3.284V	4.915V	562.328				54.15°C	115.05V
10	38.531A	9.135A	9.074A	3.071A	549.579	87.019%	1295	32.3	43.72°C	0.997
	11.935V	4.928V	3.273V	4.883V	631.562				55.56°C	115.04V
11	43.170A	9.152A	9.094A	3.074A	604.508	86.120%	1400	33.5	44.20°C	0.997
	11.925V	4.919V	3.265V	4.878V	701.935				56.42°C	115.04V
CL1	0.103A	16.028A	16.005A	0.005A	133.976	84.665%	1012	25.4	42.18°C	0.992
	11.989V	4.969V	3.316V	5.040V	158.242				51.46°C	115.03V

CL2	45.802A	1.001A	1.004A	1.002A	560.138	87.744%	1295	32.3	43.21°C	0.997
	11.940V	4.953V	3.300V	4.981V	638.379				54.15°C	115.04V

The results above are not used in the certification process

230V

Test #	12V	5V	3.3V	5VSB	DC/AC (Watts)	Efficiency	Fan Speed (RPM)	PSU Noise (dB[A])	Temps (In/Out)	PF/AC Volts
1	2.766A	1.994A	1.957A	0.995A	54.831	86.889%	240	6.0	38.95°C	0.819
	12.011V	5.023V	3.370V	5.023V	63.105				46.39°C	230.25V
2	6.576A	2.991A	2.945A	1.196A	109.809	90.946%	240	6.0	39.22°C	0.923
	12.003V	5.013V	3.360V	5.007V	120.741				46.87°C	230.26V
3	10.739A	3.499A	3.460A	1.401A	164.902	92.073%	290	6.5	39.60°C	0.956
	11.994V	5.004V	3.350V	4.995V	179.100				47.57°C	230.26V
4	14.903A	4.006A	3.948A	1.603A	219.785	92.382%	394	8.9	40.09°C	0.972
	11.985V	4.993V	3.339V	4.984V	237.909				48.40°C	230.26V
5	18.723A	5.014A	4.952A	1.810A	274.700	92.378%	540	10.4	40.42°C	0.983
	11.977V	4.981V	3.329V	4.969V	297.365				49.12°C	230.26V
6	22.556A	6.038A	5.967A	2.016A	329.711	92.155%	665	14.1	41.09°C	0.987
	11.967V	4.970V	3.316V	4.954V	357.777				50.12°C	230.26V
7	26.393A	7.056A	6.987A	2.225A	384.681	91.845%	850	17.4	41.40°C	0.990
	11.958V	4.959V	3.305V	4.939V	418.836				50.69°C	230.26V
8	30.227A	8.089A	8.014A	2.435A	439.612	91.424%	1012	25.4	41.72°C	0.992
	11.950V	4.948V	3.293V	4.922V	480.849				51.48°C	230.26V
9	34.507A	8.609A	8.556A	2.440A	494.683	91.026%	1194	29.5	42.72°C	0.992
	11.942V	4.938V	3.284V	4.915V	543.453				52.84°C	230.26V
10	38.534A	9.136A	9.075A	3.070A	549.542	90.452%	1349	32.3	43.56°C	0.993
	11.933V	4.928V	3.273V	4.883V	607.554				54.28°C	230.25V
11	43.158A	9.153A	9.095A	3.074A	604.413	89.968%	1400	33.5	44.75°C	0.993
	11.926V	4.919V	3.265V	4.877V	671.809				55.83°C	230.26V
CL1	0.100A	16.028A	16.004A	0.004A	133.931	86.131%	1070	25.5	42.48°C	0.949
	11.988V	4.969V	3.316V	5.040V	155.496				51.62°C	230.32V

CL2	45.785A	1.003A	1.003A	1.002A	560.033	91.218%	1361	32.4	44.09°C	0.993
	11.942V	4.953V	3.300V	4.980V	613.947				54.35°C	230.26V

The results above are not used in the certification process

Light Load Tests

115V

Test #	12V	5V	3.3V	5VSB	DC/AC (Watts)	Efficiency	Fan Speed (RPM)	PSU Noise (dB[A])	PF/AC Volts
1	1.216A	0.491A	0.471A	0.196A	19.668	75.571%	240	6.0	0.892
	12.019V	5.032V	3.378V	5.056V	26.026				115.08V
2	2.456A	0.990A	0.978A	0.396A	39.784	84.097%	240	6.0	0.953
	12.015V	5.028V	3.374V	5.046V	47.307				115.07V
3	3.699A	1.485A	1.481A	0.596A	59.882	87.128%	240	6.0	0.971
	12.012V	5.023V	3.369V	5.035V	68.729				115.07V
4	4.934A	1.994A	1.961A	0.796A	79.859	88.691%	240	6.0	0.981
	12.009V	5.019V	3.365V	5.024V	90.042				115.05V

The results above are not used in the certification process

230V

Test #	12V	5V	3.3V	5VSB	DC/AC (Watts)	Efficiency	Fan Speed (RPM)	PSU Noise (dB[A])	PF/AC Volts
1	1.212A	0.493A	0.470A	0.196A	19.627	76.100%	240	6.0	0.551
	12.018V	5.033V	3.379V	5.058V	25.791				230.23V
2	2.456A	0.989A	0.977A	0.396A	39.775	84.919%	240	6.0	0.742
	12.014V	5.029V	3.374V	5.047V	46.839				265.12V
3	3.698A	1.489A	1.481A	0.596A	59.890	88.186%	240	6.0	0.835
	12.011V	5.024V	3.370V	5.036V	67.913				230.24V
4	4.932A	1.994A	1.960A	0.796A	79.831	89.874%	240	6.0	0.884
	12.008V	5.020V	3.367V	5.023V	88.825				230.25V

The results above are not used in the certification process

Ripple Measurements

115V

Test	12V	5V	3.3V	5VSB	Pass/Fail
10% Load	21.5 mV	5.1 mV	9.4 mV	9.3 mV	Pass
20% Load	16.6 mV	4.3 mV	9.1 mV	10.5 mV	Pass
30% Load	16.2 mV	4.4 mV	9.3 mV	12.4 mV	Pass
40% Load	17.8 mV	5.2 mV	10.8 mV	12.8 mV	Pass
50% Load	16.7 mV	5.3 mV	11.5 mV	13.8 mV	Pass
60% Load	17.9 mV	5.6 mV	11.2 mV	16.0 mV	Pass
70% Load	18.9 mV	6.2 mV	11.7 mV	16.2 mV	Pass
80% Load	19.9 mV	6.3 mV	13.3 mV	15.7 mV	Pass
90% Load	21.0 mV	6.6 mV	13.7 mV	16.6 mV	Pass
100% Load	22.2 mV	8.1 mV	14.9 mV	19.0 mV	Pass
110% Load	23.9 mV	8.1 mV	14.7 mV	18.7 mV	Pass
Crossload 1	16.9 mV	6.4 mV	10.7 mV	7.8 mV	Pass
Crossload 2	22.2 mV	6.8 mV	14.1 mV	13.5 mV	Pass

The results above are not used in the certification process

230V

Test	12V	5V	3.3V	5VSB	Pass/Fail
10% Load	21.6 mV	5.3 mV	9.3 mV	8.9 mV	Pass
20% Load	14.4 mV	5.1 mV	7.9 mV	10.3 mV	Pass
30% Load	14.6 mV	4.2 mV	8.8 mV	12.2 mV	Pass
40% Load	16.3 mV	4.7 mV	9.9 mV	12.8 mV	Pass
50% Load	16.2 mV	5.7 mV	10.4 mV	13.1 mV	Pass
60% Load	17.1 mV	5.7 mV	10.1 mV	16.1 mV	Pass
70% Load	18.0 mV	5.9 mV	11.0 mV	15.2 mV	Pass
80% Load	19.4 mV	7.0 mV	13.3 mV	16.0 mV	Pass


Test	12V	5V	3.3V	5VSB	Pass/Fail
90% Load	20.4 mV	7.1 mV	12.2 mV	16.4 mV	Pass
100% Load	22.7 mV	7.2 mV	13.3 mV	18.7 mV	Pass
110% Load	24.1 mV	7.9 mV	12.8 mV	19.3 mV	Pass
Crossload 1	13.8 mV	6.5 mV	9.2 mV	7.7 mV	Pass
Crossload 2	22.2 mV	6.5 mV	11.5 mV	13.2 mV	Pass

The results above are not used in the certification process

be quiet! Straight Power 11 550W



Top side

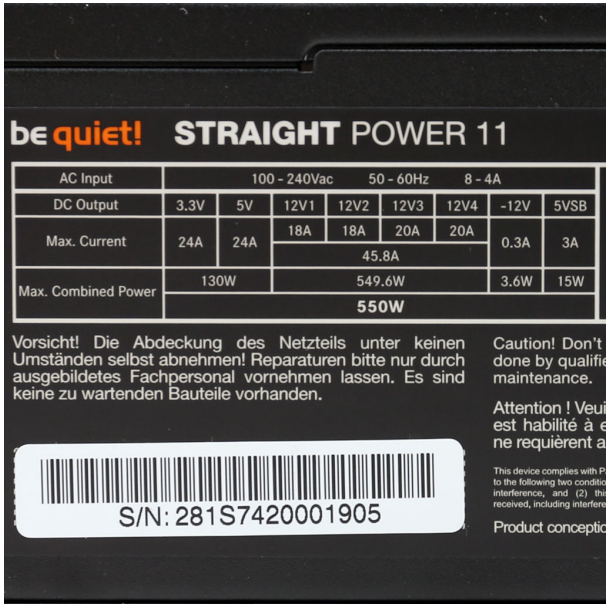

Power specifications label

All data and graphs included in this test report can be used by any individual on the following conditions:
› It should be mentioned that the test results are provided by Cybenetics
› The link to the original test results document should be provided in any case

Cybenetics runs voluntary certification programs for power supplies - ETA for efficiency, LAMBDA for noise and SAFE for safety and correct operation - and for cooling products, with DELTA for chassis soundproofing and PHI for fan airflow and static pressure. THETA rates cooler performance on AMD AM5 and Intel LGA1851 outside ISO 17065 and accreditation scope

CYBENETICS LTD Syrou 6, Latsia, 2231, Nicosia Cyprus

www.cybenetics.com - info@cybenetics.com