XPG Core Reactor II 850W

4N1680815250

Lab ID AD85002216

Certification ID 252216

Test Result Report ID: 23PS2216A

Certificate Issue Date: Aug 25, 2023

Scheme: ETA-EMI PSU

115V



230V



Scheme: LAMBDA PSU

115V



230V





Outside Validation Scope



General Information

Test Equipment

Electronic Loads	Chroma 63601-5 x2 Chroma 63600-2 Chroma 63640-80-80 x10 Chroma 63610-80-20
AC Sources	Chroma 6530, APM SP300VAC4000W-P, GW Instek ASR-3500
Power Analyzers	Rohde & Schwarz HMC8015 & NPA701
Oscilloscopes	Picoscope 4444, Siglent SDS2104X PLUS
Sound Analyzer	Bruel & Kjaer 2270 G4
Microphone	Bruel & Kjaer Type 4955-A
Temperature Logger	Picoscope TC-08
Tachometer	UNI-T UT372
Multimeters	Keysight 34465A
EMI Analyzer	TekBox TBMR-110M-EU
Isolation Transformer	4kVA
UPS	FSP Champ Tower 3kVA, CyberPower OLS3000E 3kVA
Testing Methodology	Cybenetics PSU Test Protocol

DUT Information(Non-accredited measurements)

Product Identification Details	
Brand	XPG
Model	Core Reactor II 850W
OEM/ODM	Channel Well Technology
Serial Number	4N1680815250
Product Specifications	
Manufacturer-Provided Information	
□□□□ (Vrms)	100-240
□□□□ (Arms)	12-6

□□□□ (Hz)	47-63
□□□□ (W)	850
Operating Temperature (Continuous Full Load) (°C)	
□□	ATX12V
□□□□	Fully Modular
Warranty	-
Cybenetics Measurements	
Dimensions (W x H x D)	
Weight	
□□	120mm Fluid Dynamic Bearing Fan (HA1225H12F-Z)
□□□□□	✗
Cybenetics Testing Information	
Lab ID	AD85002216
Date of receipt	Jul 25, 2023
Testing Date	Jul 31, 2023
Report Issued Date	Aug 25, 2023
Engineer Name	-
Authorized By the Laboratory Technical Manager	Aristeidis Bitziopoulos
Signature	

□□□□□ (Non-accredited measurements)

□□□□□				
□□	□□□□	□□□□□□	Gauge	In Cable Capacitors
ATX □□ 20+4 pin (640mm)	1	1	16-20AWG	□
4+4 pin EPS 12V □□ (650mm)	2	2	16AWG	□
4+4 pin EPS 12V □□ (750mm)	1	1	16AWG	□
6+2pin PCIe□□ (650mm+150mm)	2	4	16-18AWG	□
6+2pin PCIe□□ (650mm)	2	2	16AWG	□
12+4 pin PCIe (650mm) (600W)	1	1	16-24AWG	□
SATA□□ (500mm+150mm+150mm+150mm)	2	8	18AWG	□

4-pin Molex (500mm+150mm+150mm+150mm)	1	4	18AWG	□
AC Power Cord (1400mm) - C13 coupler	1	1	18AWG	-

□□□□

□		3.3V	5V	12V	5VSB	-12V
□□□□	□□	22	22	70.8	3	0.3
	□	120		850	15	3.6
□□□□□ (W)		850				

Test Results

Temperature & Compliance Info

□□□□ (°C /°F)	28-32 / 82.4-89.6
□□ ErP Lot3/6□□	✓
□□ (EU) No 617/2013□□	✓
ALPM (Alternative Low Power Mode) compatible	✓
ATX v3.0 Compliance	✓

Performance Summary

115V

Accredited	
□□□□ (>1450 load combinations)	89.464%
Average Noise Output (>1450 Load Combinations)	32.43dBA
PF□□□ (>1450 Load Combinations)	0.990
Efficiency With 10W (≤500W) or 2% (>500W) Load	71.503%
□□□□□□	0.0403W
Non-Accredited	
12V Ripple (Full Load)	23.98mV
5V Ripple (Full Load)	9.67mV

3.3V Ripple (Full Load)	20.80mV
5VSB Ripple (Full Load)	11.86mV
12V Load Regulation	1.37%
5V Load Regulation	0.59%
3.3V Load Regulation	0.39%
5VSB Load Regulation	1.60%
Inrush Current	24.700A

230V

Accredited	
□□□□ (>1450 load combinations)	91.387%
Average Noise Output (>1450 Load Combinations)	30.00dBA
PF□□□ (>1450 Load Combinations)	0.962
Efficiency With 10W (≤500W) or 2% (>500W) Load	70.997%
□□□□□□	0.0724W
Non-Accredited	
12V Ripple (Full Load)	23.75mV
5V Ripple (Full Load)	9.37mV
3.3V Ripple (Full Load)	21.62mV
5VSB Ripple (Full Load)	11.72mV
12V Load Regulation	1.38%
5V Load Regulation	0.61%
3.3V Load Regulation	0.39%
5VSB Load Regulation	1.62%
Inrush Current	45.650A
12V Transient Response (200%)	11.54V
5V Transient Response (200%)	4.972V
3.3V Transient Response (200%)	3.225V
5VSB Transient Response (200%)	4.962V
□□□□ & PG□□	21.40ms
AC Loss to PWR_OK Hold Up Time	18.70ms
PWR_OK Inactive to DC Loss Delay	2.70ms

PSU Timings: T1 (20% / 100%)	65.5ms	66.0ms
PSU Timings: T3 (20% / 100%)	130.0ms	129.5ms
OPP (26.90°C / 38.54°C)	133.57%	131.41%

□□□□ & PG□□

Hold-Up Time (ms)	21.4
AC Loss to PWR_OK Hold Up Time (ms)	18.7
PWR_OK Inactive to DC Loss Delay (ms)	2.7

□□□□

Tables

115V

Detailed Results						
	Average	Min	Limit Min	Max	Limit Max	Result
Mains Voltage RMS:	115.15 V	115.14 V	113.85 V	115.17 V	116.15 V	PASS
Mains Frequency:	60.00 Hz	60.00 Hz	59.40 Hz	60.01 Hz	60.60 Hz	PASS
Mains Voltage CF:	1.415	1.415	1.340	1.416	1.490	PASS
Mains Voltage THD:	0.13 %	0.11 %	N/A	0.15 %	2.00 %	PASS
Real Power:	0.040 W	0.036 W	N/A	0.044 W	N/A	N/A
Apparent Power:	9.904 W	9.900 W	N/A	9.907 W	N/A	N/A
Power Factor:	0.004	N/A	N/A	N/A	N/A	N/A


230V

Detailed Results						
	Average	Min	Limit Min	Max	Limit Max	Result
Mains Voltage RMS:	230.38 V	230.36 V	227.70 V	230.40 V	232.30 V	PASS
Mains Frequency:	50.00 Hz	50.00 Hz	49.50 Hz	50.00 Hz	50.50 Hz	PASS

Mains Voltage CF:	1.415	1.415	1.340	1.416	1.490	PASS
Mains Voltage THD:	0.14 %	0.13 %	N/A	0.16 %	2.00 %	PASS
Real Power:	0.072 W	0.061 W	N/A	0.096 W	N/A	N/A
Apparent Power:	33.110 W	33.103 W	N/A	33.119 W	N/A	N/A
Power Factor:	0.002	N/A	N/A	N/A	N/A	N/A

□□□□□□


115V

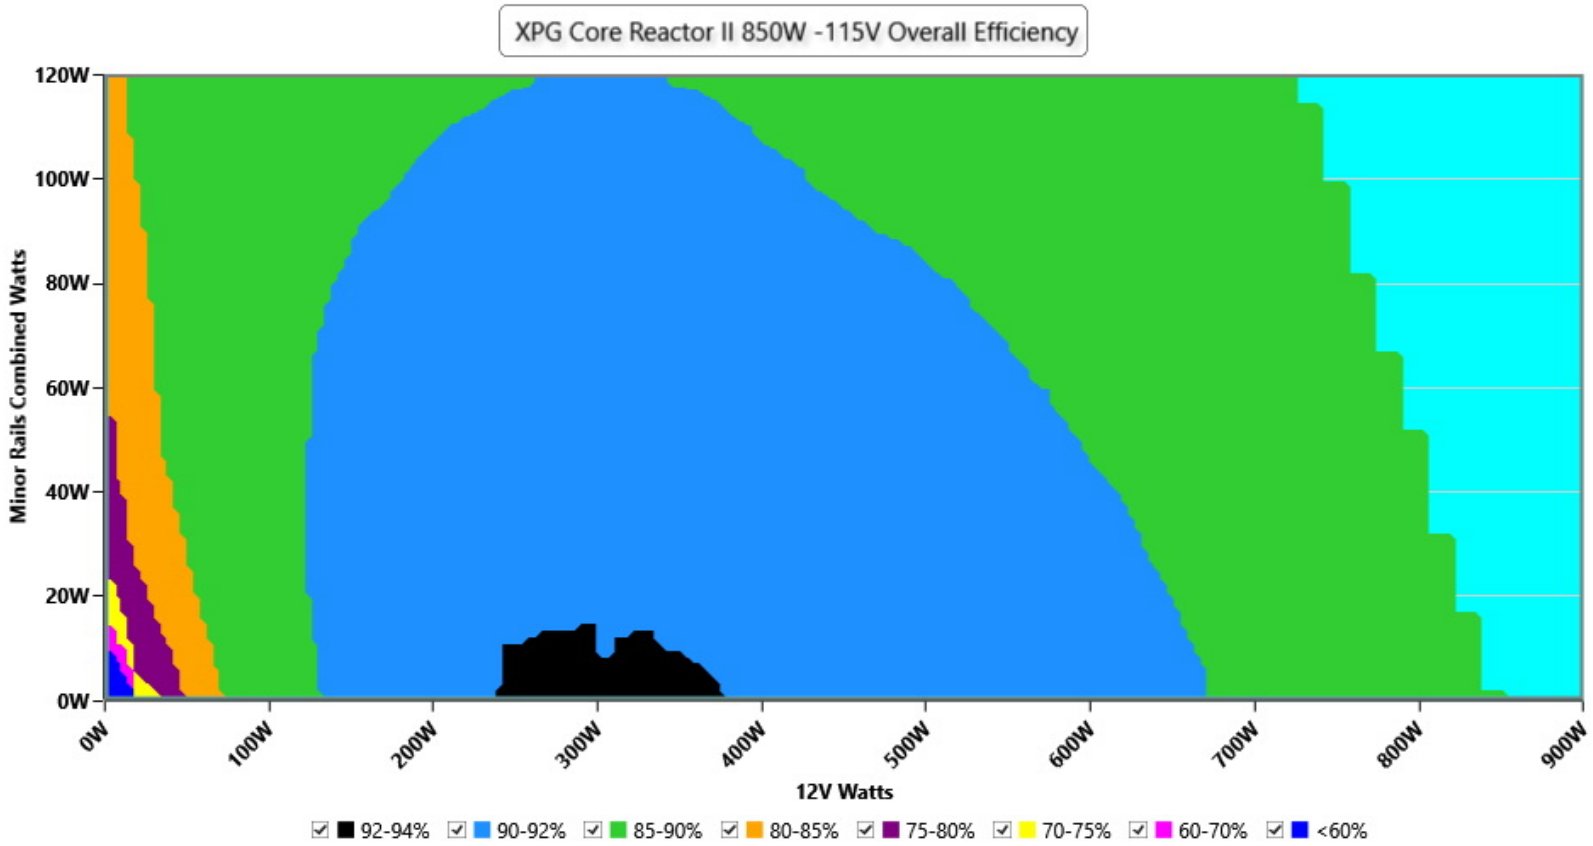


□□

This graph depicts the PSU`s efficiency throughout its entire operational range. For the generation of the efficiency and noise graphs we set our loaders to auto mode through our custom-made software before trying thousands of possible load combinations


230V

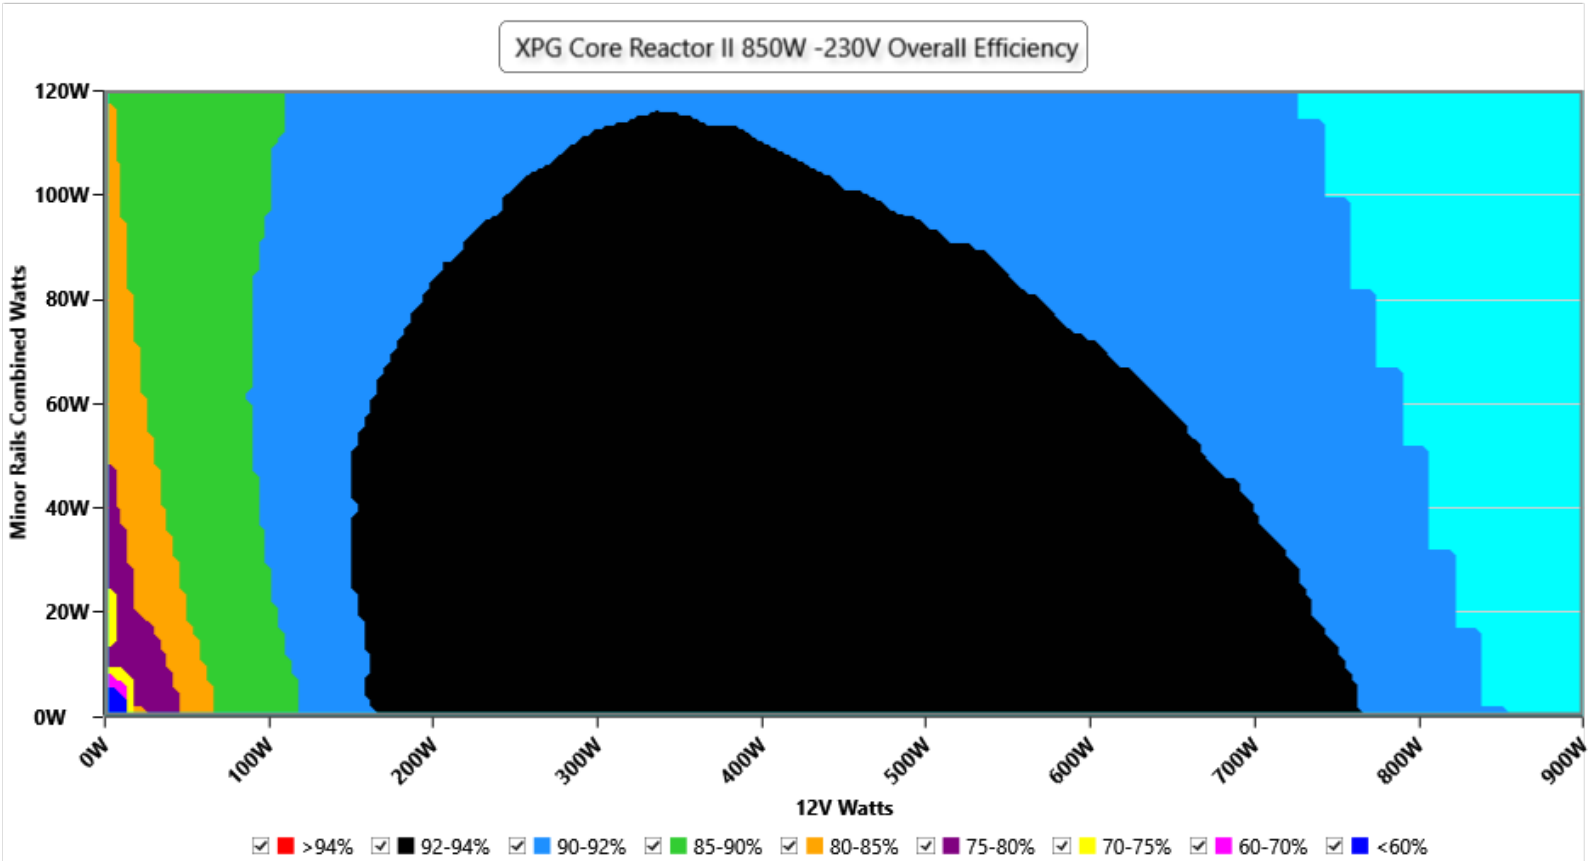

This graph depicts the PSU`s efficiency throughout its entire operational range. For the generation of the efficiency and noise graphs we set our loaders to auto mode through our custom-made software before trying thousands of possible load combinations

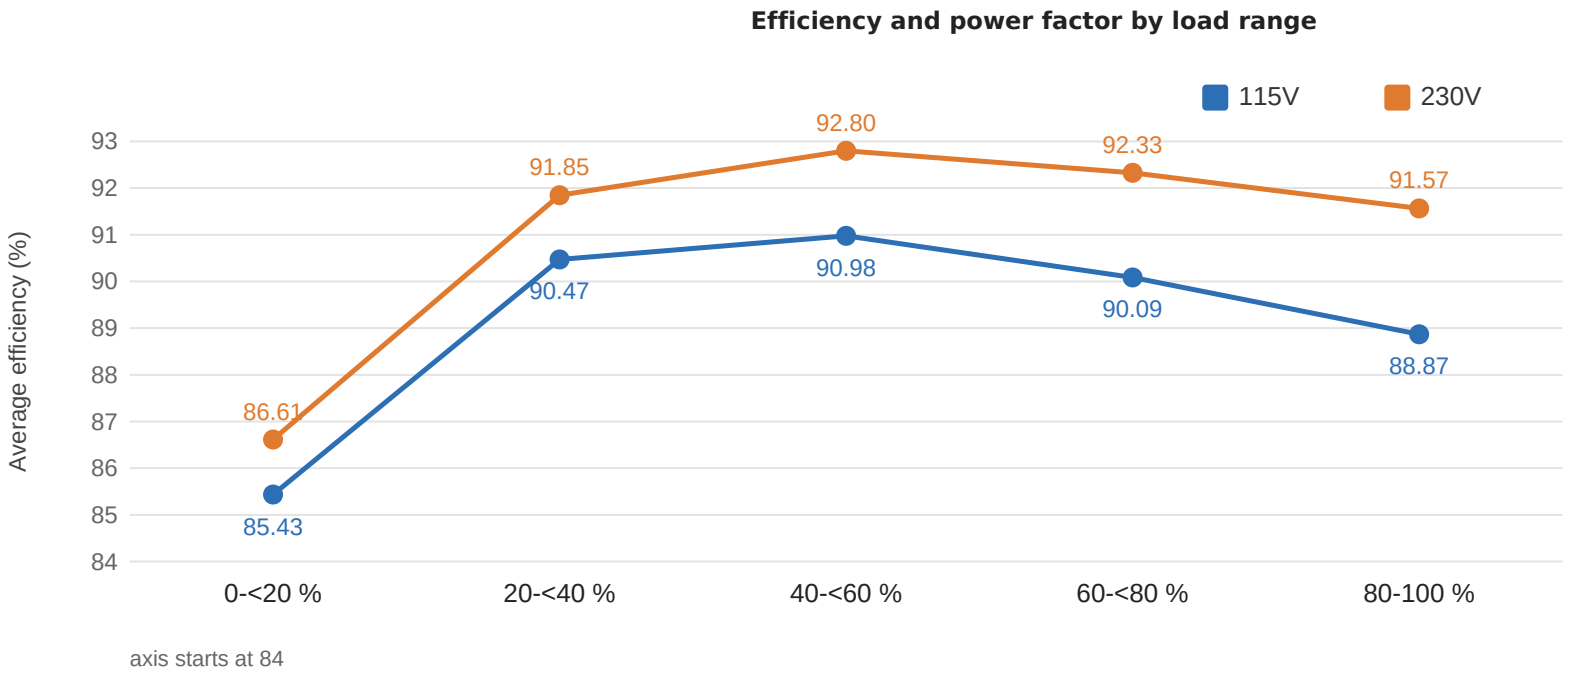

axis starts at 84

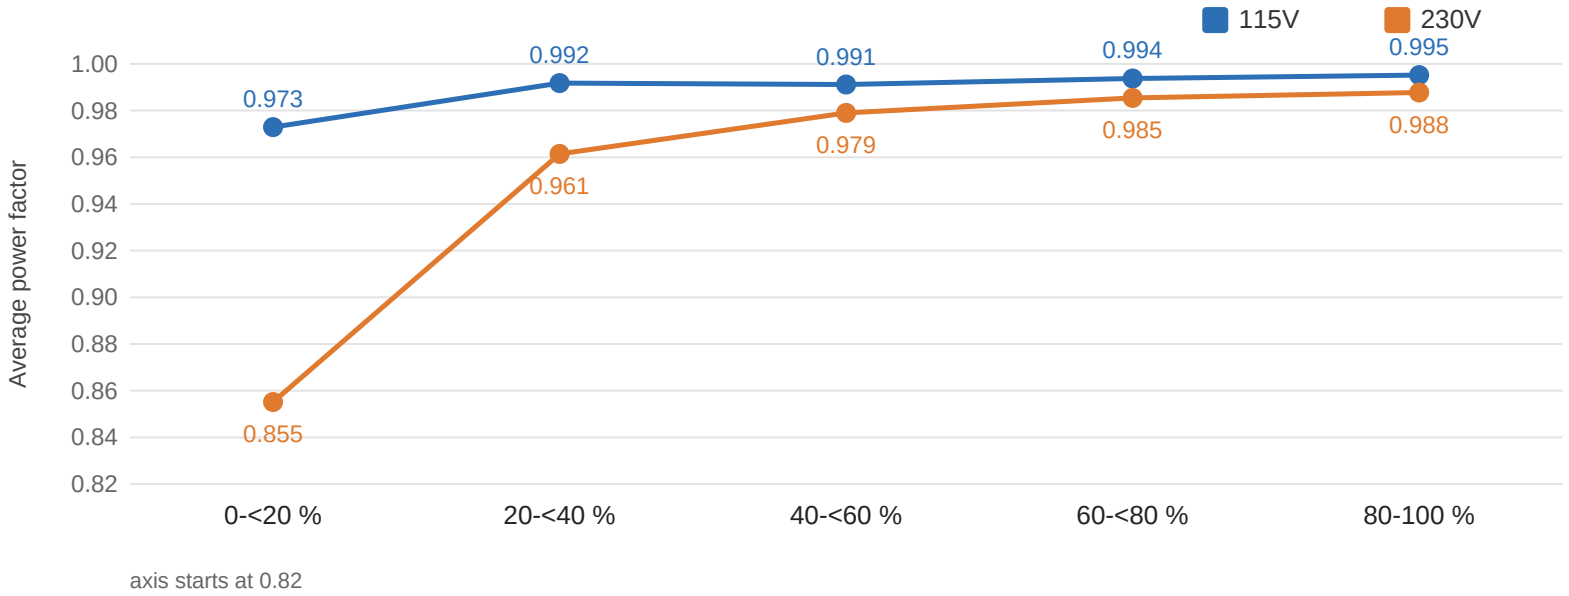

axis starts at 0.82

Load range	Points	Efficiency 115V	Efficiency 230V	PF 115V	PF 230V
0-<20 %	200 / 200	85.43%	86.61%	0.973	0.855
20-<40 %	318 / 318	90.47%	91.85%	0.992	0.961
40-<60 %	319 / 319	90.98%	92.80%	0.991	0.979
60-<80 %	318 / 318	90.09%	92.33%	0.994	0.985
80-100 %	326 / 326	88.87%	91.57%	0.995	0.988
70-100 % (High-Load)	486 / 486	89.18%	91.76%	0.995	0.987
All (published average)	1481 / 1481	89.46%	91.39%	0.990	0.962


INFO

The average efficiency and power factor in five ranges of load. Calculated from the 1481 (115V) and 1481 (230V) load combinations of the certification sweep, the same data that ETA and LAMBDA use (test 0 excluded). Load is the total DC output as a share of the rated 850 W. These are plain averages of the valid readings, as for the ETA rating, so the ranges combined give back the published averages.

Informational. Not part of the ETA or LAMBDA rating.

□□□□□


115V

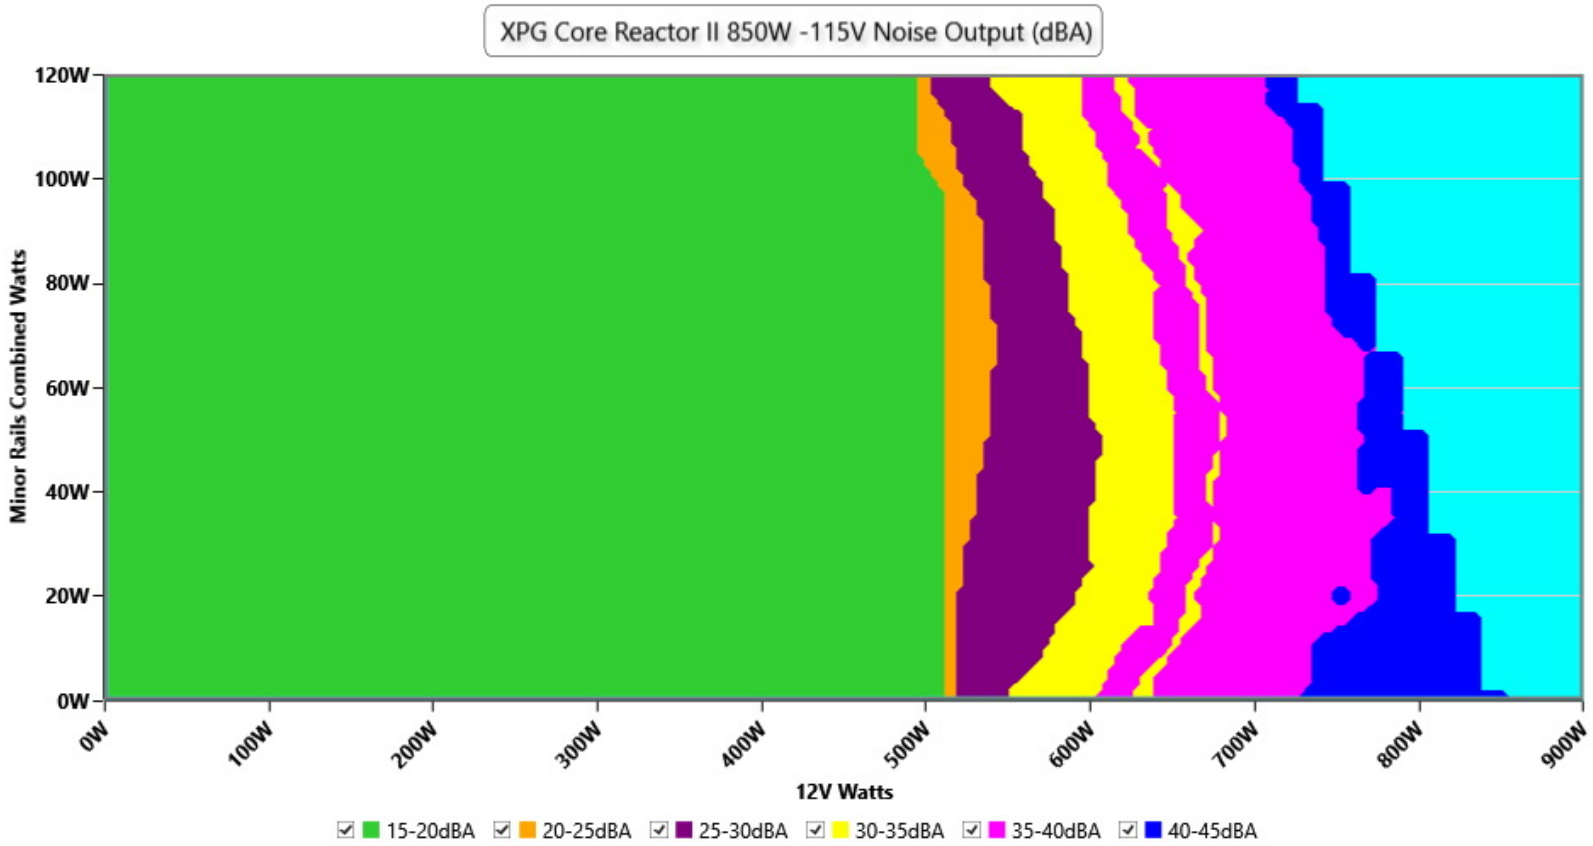

□□

The PSU`s noise in its entire operational range and under 30-32 °C ambient is depicted in this graph. The X axis represents the load on the +12V rail(s) while the Y axis is the load on the minor rails


230V

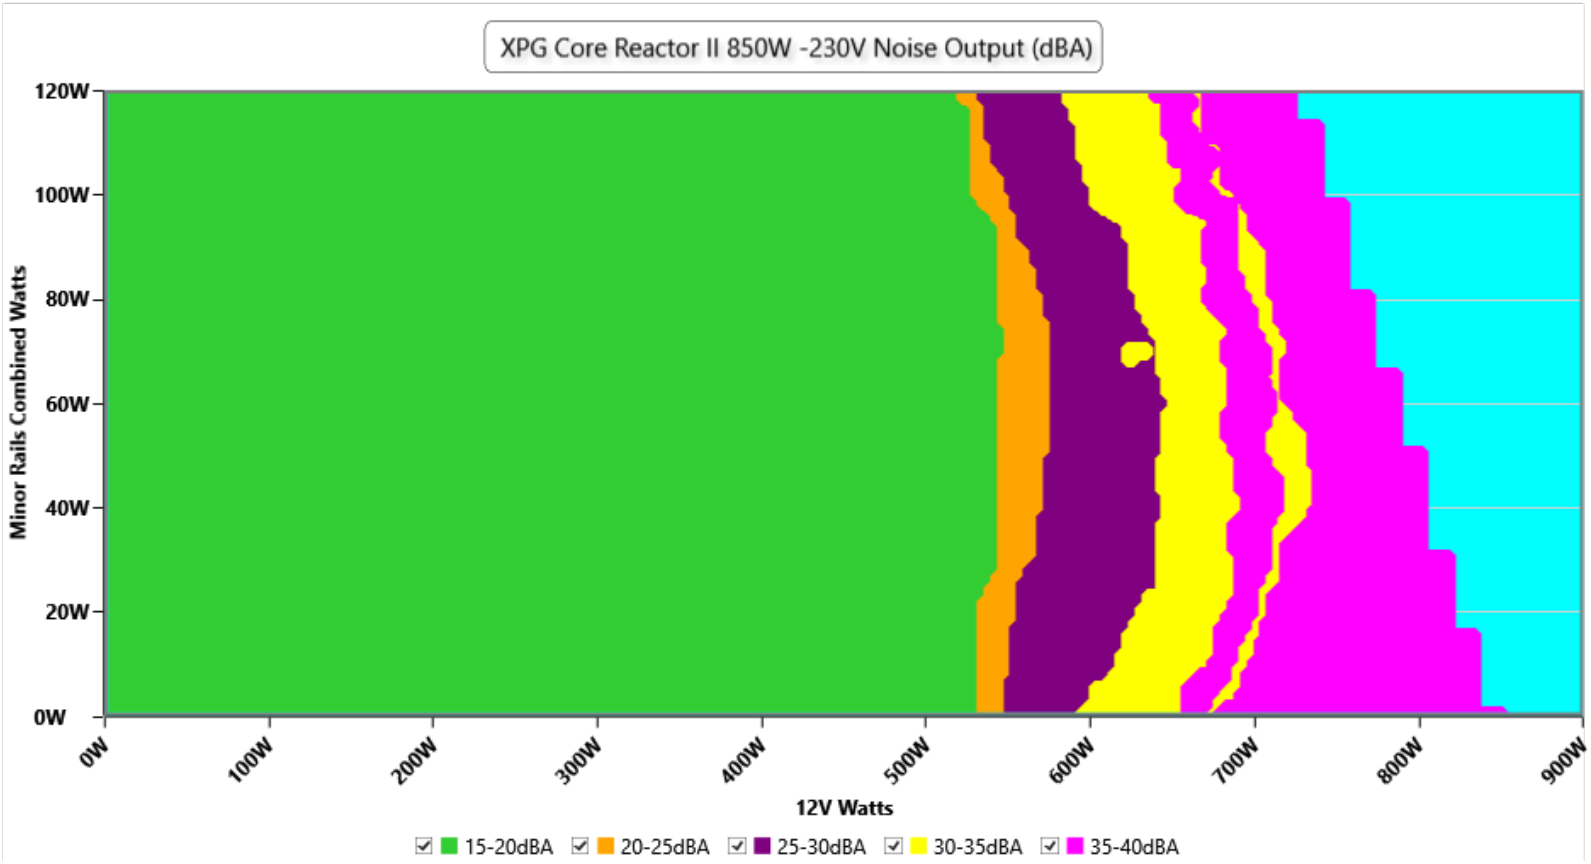

The PSU`s noise in its entire operational range and under 30-32 °C ambient is depicted in this graph. The X axis represents the load on the +12V rail(s) while the Y axis is the load on the minor rails

Noise by load range

High-Load Index (70-100 % load)
Noise **37.1 dB(A)** at 115V and **34.6 dB(A)** at 230V · loudest point 41.9 dB(A)
Efficiency 89.18% / 91.76% · power factor 0.995 / 0.987 (115V / 230V)

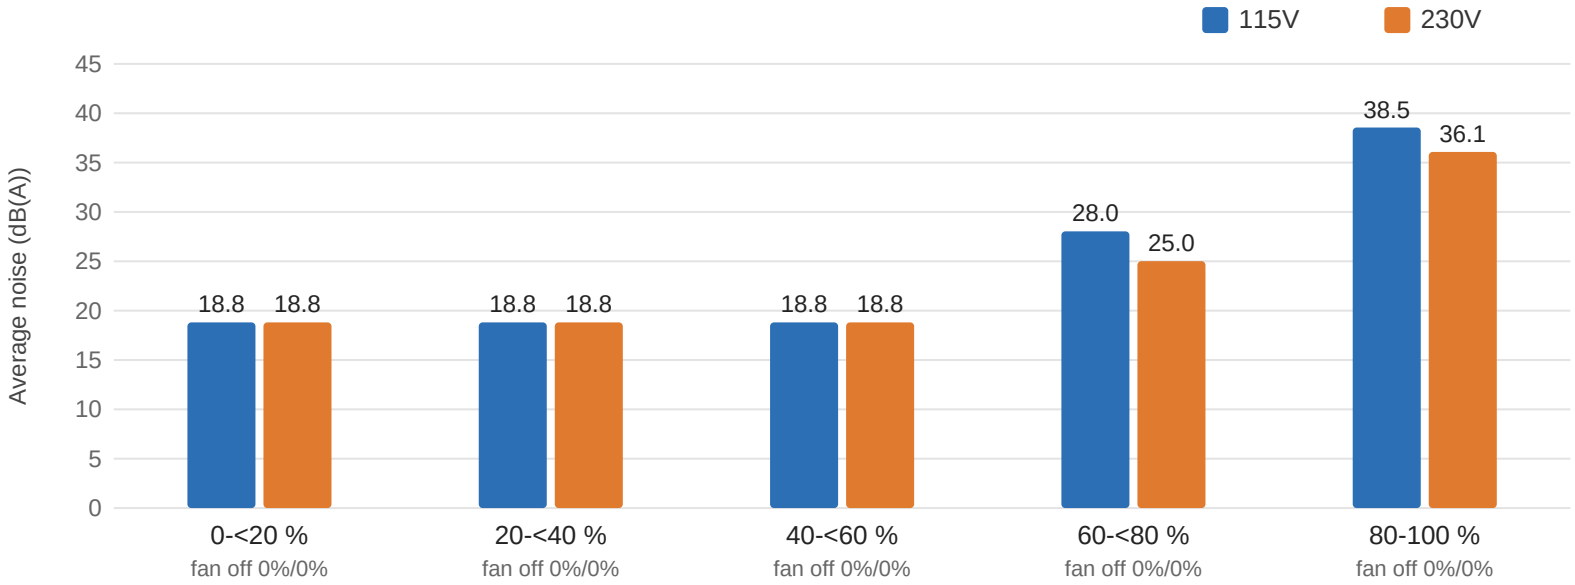

Load range	Noise 115V avg (loudest)	Noise 230V avg (loudest)	Fan off 115V / 230V
0-<20 %	18.8 (18.8)	18.8 (18.8)	0% / 0%
20-<40 %	18.8 (18.8)	18.8 (18.8)	0% / 0%
40-<60 %	18.8 (18.8)	18.8 (18.8)	0% / 0%
60-<80 %	28.0 (37.7)	25.0 (34.9)	0% / 0%
80-100 %	38.5 (41.9)	36.1 (40.0)	0% / 0%
70-100 % (High-Load)	37.1 (41.9)	34.6 (40.0)	0% / 0%
All (published average)	32.4 (41.9)	30.0 (40.0)	0% / 0%

INFO

The average noise in five ranges of load, the share of points with the fan stopped (semi-passive operation), and the High-Load Index: the same figures for all points at 70 % of the rated output and above. Calculated from the 1481 (115V) and 1481 (230V) load combinations of the certification sweep, the same data that ETA and LAMBDA use (test 0 excluded). Load is the total DC output as a share of the rated 850 W. Noise is averaged on the energy scale, as for LAMBDA, so the ranges combined give back the published average noise. Each load combination is held for about five seconds; the stabilized readings at fixed loads are under "Noise under high ambient temperature".

Informational. Not part of the ETA or LAMBDA rating.

Noise under high ambient temperature (indicative)

115V

Load	Normal ambient fan · noise · intake	High ambient fan · noise · intake	Noise change
10%	895 RPM · 20.6 dB(A) · 40.5 °C	895 RPM · 20.6 dB(A) · 40.5 °C	**+0.0 dB(A)**
20%	900 RPM · 20.9 dB(A) · 40.7 °C	900 RPM · 20.9 dB(A) · 40.7 °C	**+0.0 dB(A)**
50%	915 RPM · 21.5 dB(A) · 42.4 °C	915 RPM · 21.5 dB(A) · 42.4 °C	**+0.0 dB(A)**
100%	2335 RPM · 48.8 dB(A) · 45.4 °C	2335 RPM · 48.8 dB(A) · 45.4 °C	**+0.0 dB(A)**

230V


Load	Normal ambient fan · noise · intake	High ambient fan · noise · intake	Noise change
10%	896 RPM · 20.6 dB(A) · 40.4 °C	896 RPM · 20.6 dB(A) · 40.4 °C	**+0.0 dB(A)**
20%	896 RPM · 20.6 dB(A) · 40.7 °C	896 RPM · 20.6 dB(A) · 40.7 °C	**+0.0 dB(A)**
50%	907 RPM · 20.9 dB(A) · 42.6 °C	907 RPM · 20.9 dB(A) · 42.6 °C	**+0.0 dB(A)**
100%	2323 RPM · 48.8 dB(A) · 45.7 °C	2323 RPM · 48.8 dB(A) · 45.7 °C	**+0.0 dB(A)**

INFO

Fan speed, noise and the measured intake temperature at 10, 20, 50 and 100 % load, from the two load regulation tests: at normal ambient (about 30-32 °C) and at high ambient (about 40-47 °C). These are stabilized readings at fixed loads, not averages over the certification sweep, so they are indicative of how the fan behaves when it is hot. "<6.0" is the floor of our sound meter: the fan is stopped or too quiet to measure (the fan speed column says which); with the fan stopped, the intake sensor can read higher than the chamber air.


Informational. Not part of the ETA or LAMBDA rating.

Indicative Performance

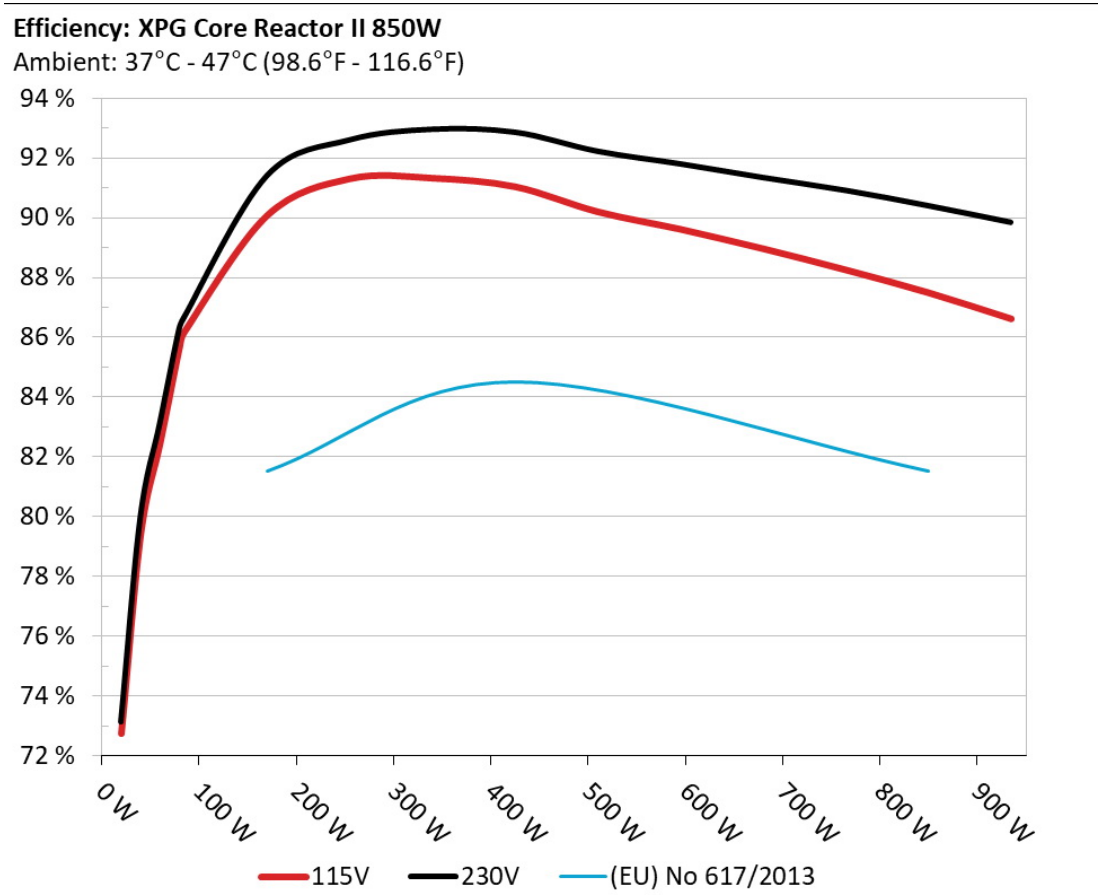

The PSU`s efficiency under high ambient temperatures with 115V and 230V input. For this graph the results of the 10-110% load regulation table are used

5Vsb□□□□

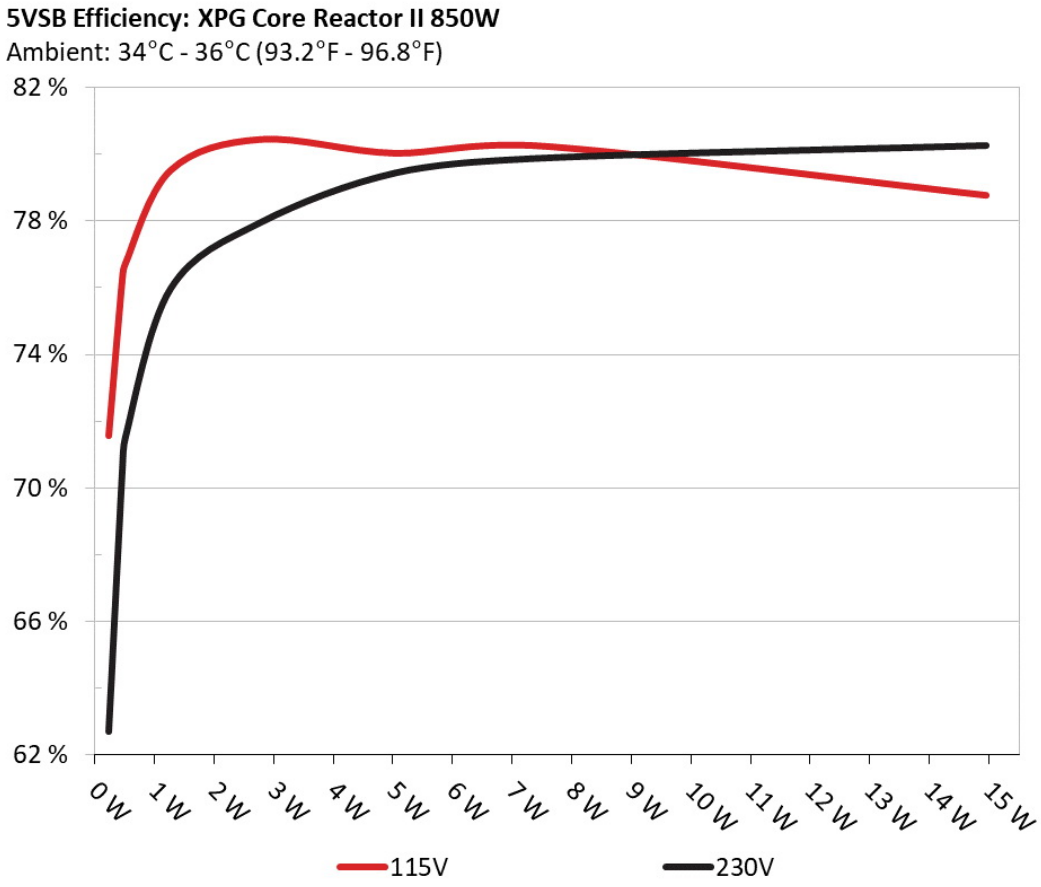

□□

This graph depicts the efficiency levels of the 5VSB rail with 115V and 230V input

□□□□ □□ 5Vsb □□ (ErP Lot3/6 & CEC)

115V

□□ #	5VSB	DC/AC (□)	□□	PF/AC □□
1	0.045A	0.228W	71.07%	0.032
	5.068V	0.321W		115.17V
2	0.09A	0.456W	75.777%	0.06
	5.067V	0.602W		115.16V
3	0.55A	2.78W	79.949%	0.269
	5.054V	3.477W		115.16V
4	1A	5.043W	79.531%	0.369
	5.042V	6.34W		115.17V
5	1.5A	7.543W	79.743%	0.42
	5.028V	9.459W		115.16V
6	3A	14.957W	78.274%	0.487
	4.985V	19.11W		115.16V

230V

□□ #	5VSB	DC/AC (□)	□□	PF/AC □□
1	0.045A	0.228W	62.2%	0.011
	5.068V	0.366W		230.39V
2	0.09A	0.456W	70.04%	0.02
	5.067V	0.651W		230.39V
3	0.55A	2.78W	77.447%	0.103
	5.054V	3.59W		230.39V
4	1A	5.042W	78.928%	0.171
	5.041V	6.387W		230.39V
5	1.5A	7.542W	79.373%	0.23
	5.027V	9.503W		230.39V
6	3A	14.956W	79.747%	0.334
	4.985V	18.757W		230.38V

Supplementary Tests (For Reference)

10-110%□□□□

115V

□□	12V	5V	3.3V	5VSB	DC/AC (□)	□□	□□□□ (RPM)	□□□□□□□ (dB[A])	□□ (□□ /□□)	PF/AC □□
10%	5.182A	1.965A	1.99A	0.986A	85.001	86.674%	895	20.6	40.54°C	0.977
	12.235V	5.09V	3.316V	5.072V	98.07				44.75°C	115.14V
20%	11.450A	2.949A	2.987A	1.185A	169.952	90.559%	900	20.9	40.67°C	0.99
	12.143V	5.086V	3.314V	5.065V	187.668				45.23°C	115.12V
30%	18.039A	3.443A	3.486A	1.384A	254.958	91.789%	902	20.8	41.49°C	0.993
	12.135V	5.083V	3.313V	5.058V	277.765				46.58°C	115.09V
40%	24.608A	3.937A	3.985A	1.584A	340.05	91.808%	905	20.9	41.9°C	0.99
	12.144V	5.081V	3.312V	5.053V	370.391				47.31°C	115.07V
50%	30.739A	4.924A	4.983A	1.784A	425.044	91.518%	915	21.5	42.44°C	0.992
	12.185V	5.079V	3.312V	5.047V	464.436				48.37°C	115.05V
60%	36.937A	5.913A	5.983A	1.984A	509.587	90.682%	1513	37.0	42.82°C	0.993
	12.177V	5.074V	3.31V	5.04V	561.951				49.25°C	115.02V
70%	43.214A	6.905A	6.985A	2.186A	594.918	90.094%	1812	41.4	43.37°C	0.994
	12.168V	5.07V	3.307V	5.033V	660.33				50.38°C	115V
80%	49.501A	7.897A	7.987A	2.288A	679.755	89.446%	2027	44.9	43.87°C	0.995
	12.159V	5.065V	3.305V	5.028V	759.961				52.02°C	114.98V
90%	56.162A	8.395A	8.473A	2.389A	765.186	88.732%	2335	48.8	44.73°C	0.995
	12.156V	5.063V	3.304V	5.024V	862.365				53.77°C	114.95V
100%	62.586A	8.894A	8.991A	2.996A	850.036	87.97%	2335	48.8	45.39°C	0.996
	12.149V	5.06V	3.303V	5.007V	966.278				55.46°C	114.92V
110%	68.874A	9.89A	10.085A	2.998A	934.609	87.101%	2341	49.0	46.56°C	0.996
	12.143V	5.056V	3.301V	5.005V	1073.021				57.48°C	114.9V
CL1	0.115A	14.199A	14.408A	0A	121.3	83.559%	1303	33.2	42.01°C	0.986
	12.168V	5.085V	3.31V	5.109V	145.168				47.51°C	115.13V

CL2	0.115A	21.568A	0A	0A	111.389	82.422%	921	21.6	41.7°C	0.985
	12.169V	5.1V	3.314V	5.145V	135.146				48.73°C	115.14V
CL3	0.114A	0A	21.837A	0A	73.991	77.575%	901	20.9	41.45°C	0.975
	12.237V	5.095V	3.324V	5.087V	95.38				50.47°C	115.15V
CL4	69.897A	0A	0.001A	0A	849.936	88.385%	2333	48.7	45.81°C	0.996
	12.160V	5.072V	3.313V	5.077V	961.631				56.75°C	114.93V

The results above are not used in the certification process

230V

□□	12V	5V	3.3V	5VSB	DC/AC (□)	□□	□□□□ (RPM)	□□□□□□□ (dB[A])	□□ (□□ /□□)	PF/AC □□
10%	5.180A	1.965A	1.99A	0.986A	85.003	87.159%	896	20.6	40.41°C	0.842
	12.238V	5.09V	3.316V	5.072V	97.527				44.66°C	230.39V
20%	11.450A	2.95A	2.987A	1.185A	169.961	91.884%	896	20.6	40.65°C	0.938
	12.145V	5.086V	3.314V	5.065V	184.978				45.29°C	230.38V
30%	18.041A	3.444A	3.487A	1.384A	254.971	93.086%	896	20.6	41.49°C	0.964
	12.134V	5.083V	3.313V	5.058V	273.908				46.63°C	230.37V
40%	24.616A	3.938A	3.986A	1.584A	340.06	93.443%	903	20.8	41.78°C	0.974
	12.140V	5.08V	3.312V	5.051V	363.919				47.31°C	230.36V
50%	30.744A	4.924A	4.983A	1.784A	425.074	93.343%	907	20.9	42.62°C	0.98
	12.183V	5.079V	3.312V	5.047V	455.386				48.65°C	230.35V
60%	36.933A	5.912A	5.982A	1.984A	509.617	92.708%	1626	38.5	42.85°C	0.984
	12.179V	5.075V	3.31V	5.041V	549.696				49.49°C	230.34V
70%	43.217A	6.905A	6.984A	2.186A	595.016	92.283%	1904	42.6	43.58°C	0.986
	12.169V	5.071V	3.308V	5.033V	644.766				50.66°C	230.33V
80%	49.485A	7.895A	7.985A	2.287A	679.821	91.829%	2172	46.3	43.66°C	0.988
	12.164V	5.067V	3.306V	5.029V	740.304				51.74°C	230.32V
90%	56.175A	8.395A	8.473A	2.389A	765.237	91.396%	2300	49.1	44.06°C	0.988
	12.154V	5.063V	3.304V	5.023V	837.275				53.35°C	230.31V
100%	62.600A	8.895A	8.992A	2.997A	850.089	90.885%	2323	48.8	45.68°C	0.989
	12.146V	5.059V	3.303V	5.006V	935.341				55.77°C	230.3V

110%	68.888A	9.889A	10.084A	2.997A	934.647	90.332%	2328	48.7	46.76°C	0.99
	12.141V	5.057V	3.302V	5.005V	1034.678				57.69°C	230.29V
CL1	0.115A	14.197A	14.405A	0A	121.303	84.486%	1282	32.5	42.85°C	0.91
	12.165V	5.085V	3.311V	5.109V	143.576				48.39°C	230.39V
CL2	0.115A	21.565A	0A	0A	111.39	83.362%	920	21.6	41.75°C	0.9
	12.170V	5.101V	3.315V	5.145V	133.621				48.78°C	230.39V
CL3	0.114A	0A	21.861A	0A	73.992	78.168%	896	20.6	39.41°C	0.836
	12.232V	5.089V	3.321V	5.081V	94.659				48.48°C	230.39V
CL4	69.924A	0A	0.001A	0A	849.983	91.407%	2326	48.8	45.78°C	0.989
	12.156V	5.071V	3.313V	5.076V	929.891				56.77°C	230.3V

The results above are not used in the certification process

20-80□□□□□

115V

□□	12V	5V	3.3V	5VSB	DC/AC (□)	□□	□□□□ (RPM)	□□□□□□□ (dB[A])	□□ (□□ /□□)	PF/AC □□
20W	1.230A	0.491A	0.498A	0.197A	20.003	73.218%	874	19.6	36.53°C	0.811
	12.070V	5.089V	3.314V	5.087V	27.32				39.58°C	115.17V
40W	2.708A	0.688A	0.697A	0.295A	40	79.911%	882	20.0	37.84°C	0.927
	12.071V	5.09V	3.315V	5.086V	50.058				41.09°C	115.15V
60W	4.130A	0.884A	0.896A	0.393A	59.999	82.966%	887	20.4	38.21°C	0.962
	12.234V	5.09V	3.315V	5.084V	72.314				41.99°C	115.15V
80W	5.586A	1.081A	1.095A	0.492A	79.954	86.171%	889	20.4	38.93°C	0.974
	12.233V	5.089V	3.315V	5.081V	92.785				42.91°C	115.14V

The results above are not used in the certification process

230V

□□	12V	5V	3.3V	5VSB	DC/AC (□)	□□	□□□□ (RPM)	□□□□□□□ (dB[A])	□□ (□□ /□□)	PF/AC □□
20W	1.230A	0.491A	0.498A	0.197A	20.003	73.624%	879	20.0	36.76°C	0.444
	12.073V	5.09V	3.314V	5.087V	27.295				39.85°C	230.39V
40W	2.708A	0.688A	0.697A	0.295A	40.002	80.472%	881	20.0	36.93°C	0.639
	12.072V	5.09V	3.315V	5.085V	49.707				40.23°C	230.39V
60W	4.130A	0.884A	0.896A	0.394A	60	83.616%	883	20.1	37.65°C	0.765
	12.233V	5.089V	3.315V	5.083V	71.76				41.17°C	230.39V
80W	5.586A	1.081A	1.095A	0.492A	79.959	86.774%	885	20.2	38.56°C	0.829
	12.233V	5.089V	3.315V	5.08V	92.15				42.29°C	230.39V

The results above are not used in the certification process

□□□□

115V

Test	12V	5V	3.3V	5VSB	Pass/Fail
10% Load	9.24mV	4.14mV	5.37mV	6.17mV	Pass
20% Load	12.55mV	4.35mV	6.81mV	6.37mV	Pass
30% Load	10.52mV	5.98mV	8.85mV	7.29mV	Pass
40% Load	11.80mV	5.22mV	9.01mV	7.39mV	Pass
50% Load	12.62mV	5.58mV	10.03mV	7.44mV	Pass
60% Load	13.74mV	6.24mV	12.08mV	8.26mV	Pass
70% Load	15.17mV	6.80mV	13.00mV	9.28mV	Pass
80% Load	16.14mV	7.62mV	18.17mV	9.58mV	Pass
90% Load	17.47mV	8.18mV	19.29mV	9.89mV	Pass
100% Load	23.98mV	9.67mV	20.80mV	11.86mV	Pass
110% Load	25.17mV	9.97mV	22.86mV	12.29mV	Pass
Crossload1	21.63mV	5.85mV	13.96mV	6.80mV	Pass
Crossload2	17.71mV	8.08mV	6.19mV	7.95mV	Pass

Test	12V	5V	3.3V	5VSB	Pass/Fail
Crossload3	7.20mV	4.55mV	15.46mV	6.53mV	Pass
Crossload4	23.66mV	8.52mV	16.42mV	10.89mV	Pass


The results above are not used in the certification process

230V

Test	12V	5V	3.3V	5VSB	Pass/Fail
10% Load	8.48mV	4.25mV	5.42mV	6.53mV	Pass
20% Load	12.96mV	4.40mV	6.60mV	6.42mV	Pass
30% Load	10.50mV	5.52mV	8.44mV	6.88mV	Pass
40% Load	11.39mV	5.22mV	8.60mV	7.03mV	Pass
50% Load	12.52mV	5.68mV	10.08mV	8.16mV	Pass
60% Load	13.99mV	6.39mV	11.31mV	8.62mV	Pass
70% Load	15.53mV	7.47mV	12.69mV	8.87mV	Pass
80% Load	16.24mV	7.57mV	17.86mV	9.59mV	Pass
90% Load	17.42mV	8.08mV	19.14mV	10.50mV	Pass
100% Load	23.75mV	9.37mV	21.62mV	11.72mV	Pass
110% Load	26.79mV	10.14mV	23.17mV	11.70mV	Pass
Crossload1	23.08mV	5.71mV	13.67mV	6.81mV	Pass
Crossload2	18.37mV	8.54mV	6.09mV	7.44mV	Pass
Crossload3	7.00mV	4.76mV	15.61mV	6.12mV	Pass
Crossload4	24.77mV	8.69mV	16.45mV	11.04mV	Pass

The results above are not used in the certification process

XPG Core Reactor II 850W

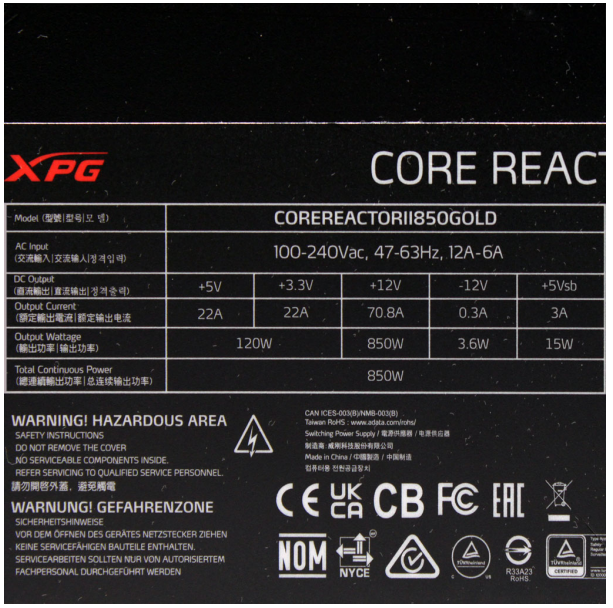



Top side Power specifications label

本测试报告中包含的所有数据和图表均可在以下条件下由任何人使用：使用过程需提及测试结果由 Cybenetics提供。
在任何情况下都应提供原始测试结果文档的网站链接

Cybenetics 提供自愿性认证计划：电源方面有 ETA（效率）、 LAMBDA（噪声）与 SAFE （安全与正确运行）；散热产品方面有 DELTA（机箱隔音）与 PHI（风扇风量与静压）

CYBENETICS LTD Syrou 6, Latsia, 2231, Nicosia Cyprus www.cybenetics.com - info@cybenetics.com

Cybenetics - XPG Core Reactor II 850W - Test Report - Page 24 / 24