



## Corsair AX1500i

Serial Number 16509500001009610055

Lab ID 102

Certification ID 25102

Test Result Report ID:

Certificate Issue Date: Feb 5, 2018

115V 230V

Scheme: ETA-EMI PSU



115V 230V



Scheme: LAMBDA PSU

A handwritten signature in blue ink, appearing to read "Aristeidis Bitziopoulos".

Aristeidis Bitziopoulos, Certification Body General Manager

## General Information

### Test Equipment

|                       |                                                                                     |
|-----------------------|-------------------------------------------------------------------------------------|
| Electronic Loads      | Chroma 63601-5 x2<br>Chroma 63600-2<br>Chroma 63640-80-80 x10<br>Chroma 63610-80-20 |
| AC Sources            | Chroma 6530, APM SP300VAC4000W-P, GW Instek ASR-3500                                |
| Power Analyzers       | Rohde & Schwarz HMC8015 & NPA701                                                    |
| Oscilloscopes         | Picoscope 4444, Siglent SDS2104X PLUS                                               |
| Sound Analyzer        | Bruel & Kjaer 2270 G4                                                               |
| Microphone            | Bruel & Kjaer Type 4955-A                                                           |
| Temperature Logger    | Picoscope TC-08                                                                     |
| Tachometer            | UNI-T UT372                                                                         |
| Multimeters           | Keysight 34465A                                                                     |
| EMI Analyzer          | TekBox TBMR-110M-EU                                                                 |
| Isolation Transformer | 4kVA                                                                                |
| UPS                   | FSP Champ Tower 3kVA, CyberPower OLS3000E 3kVA                                      |
| Testing Methodology   | Cybenetics PSU Test Protocol                                                        |

### DUT Information(Non-accredited measurements)

|                                   |                      |
|-----------------------------------|----------------------|
| Product Identification Details    |                      |
| Brand                             | Corsair              |
| Model                             | AX1500i              |
| OEM/ODM                           | Flextronics          |
| Serial Number                     | 16509500001009610055 |
| Product Specifications            |                      |
| Manufacturer-Provided Information |                      |
| Rated Voltage (Vrms)              | 100-240              |
| Rated Current (Arms)              | 15-8                 |
| Rated Frequency (Hz)              | 50-60                |

|                                                   |                                                                                     |
|---------------------------------------------------|-------------------------------------------------------------------------------------|
| Rated Power (W)                                   | 1500                                                                                |
| Operating Temperature (Continuous Full Load) (°C) |                                                                                     |
| Type                                              | ATX12V                                                                              |
| Cable Design                                      | Fully Modular                                                                       |
| Warranty                                          | -                                                                                   |
| Cybenetics Measurements                           |                                                                                     |
| Dimensions (W x H x D)                            |                                                                                     |
| Weight                                            |                                                                                     |
| Cooling                                           | 140mm Fluid Dynamic Bearing Fan (NR140P)                                            |
| Semi-Passive Operation                            | ✓ (selectable)                                                                      |
| Cybenetics Testing Information                    |                                                                                     |
| Lab ID                                            | 102                                                                                 |
| Date of receipt                                   | Jan 25, 2018                                                                        |
| Testing Date                                      | Feb 3, 2018                                                                         |
| Report Issued Date                                | Feb 5, 2018                                                                         |
| DUT Notes                                         | CP-9020057                                                                          |
| Engineer Name                                     | -                                                                                   |
| Authorized By the Laboratory Technical Manager    | Aristeidis Bitziopoulos                                                             |
| Signature                                         |  |

### Cables and Connectors(Non-accredited measurements)

| Modular Cables                                 |             |                         |          |
|------------------------------------------------|-------------|-------------------------|----------|
| Description                                    | Cable Count | Connector Count (Total) | Gauge    |
| ATX connector 20+4 pin (700mm)                 | 1           | 1                       | 16-22AWG |
| 4+4 pin EPS12V (800mm) / (650mm)               | 1 / 1       | 1 / 1                   | 18AWG    |
| 6+2 pin PCIe (700mm+155mm) / (650mm) / (800mm) | 2 / 4 / 2   | 4 / 4 / 2               | 18AWG    |
| SATA (500mm+90mm+90mm+90mm)                    | 3           | 12                      | 18AWG    |
| SATA (550mm+90mm+90mm+90mm)                    | 2           | 8                       | 18AWG    |
| 4 pin Molex (450mm+100mm+100mm+100mm)          | 3           | 12                      | 18AWG    |
| FDD Adapter (+105mm)                           | 2           | 2                       | 22AWG    |

|                                                     |       |       |               |
|-----------------------------------------------------|-------|-------|---------------|
| C-Link USB Cable (800mm) / C-Link I2C Cable (800mm) | 1 / 1 | 1 / 1 | 24-28 / 29AWG |
|-----------------------------------------------------|-------|-------|---------------|

### Power Specifications

| Rail                 |       | 3.3V | 5V | 12V  | 5VSB | -12V |
|----------------------|-------|------|----|------|------|------|
| Max. Power           | Amps  | 30   | 30 | 125  | 3.5  | 0.8  |
|                      | Watts | 180  |    | 1500 | 17.5 | 9.6  |
| Total Max. Power (W) |       | 1500 |    |      |      |      |

### Parts Description

|                      |                                                                                                                                                                  |
|----------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Primary Side         |                                                                                                                                                                  |
| Transient Filter     | 6x Y caps, 5x X caps, 3x CM chokes, 1x MOV, 2x TVS diodes                                                                                                        |
| Inrush Protection    | NTC Thermistor & Relay                                                                                                                                           |
| Rectifiers           | 2x Toshiba TK62J60W (600V, 61.8A @ 150°C, 33 mOhm)                                                                                                               |
| APFC MOSFETS         | 4x Infineon IPA60R099<br>(650V, 24A @ 100°C, 99 mOhm)                                                                                                            |
| APFC Boost Diode     | 4x CREE C3D06060A (600V, 6A @ 154°C)                                                                                                                             |
| Hold-up Cap(s)       | 2x Nippon Chemi-Con (420V, 470uF & 680uF or 1150uF combined, 2000h @ 105°C, KMR)                                                                                 |
| Main Switchers       | 4x Infineon IPA60R099<br>(650V, 24A @ 100°C, 0.099 Ohm)                                                                                                          |
| Topology             | Primary side: Bridgeless Design, Two Phase Interleaved PFC, Full-Bridge & LLC Resonant Converter<br>Secondary side: Synchronous Rectification & DC-DC converters |
| Digital Controllers  |                                                                                                                                                                  |
| Main Controller      | Freescale MC56F8236                                                                                                                                              |
| MCUs                 | Silicon Lab C8051F310 & C8051F380                                                                                                                                |
| Secondary Side       |                                                                                                                                                                  |
| +12V                 | 16x fets                                                                                                                                                         |
| 5V & 3.3V            | 2x DC-DC Converters                                                                                                                                              |
| Filtering Capacitors | Electrolytics: Nippon Chemi-Con (105°C, KY, KZE), Rubycon (105°C, ZLH)<br>Polymers: Nippon Chemi-Con, CapXon                                                     |
| Fan Model            | NR135P (12V, 0.22A, Fluid Dynamic Bearing)                                                                                                                       |
| -12V Circuit         |                                                                                                                                                                  |
| Rectifier            | IPA60R950C6 (650V, 2.8A @ 100°C, 0.95 Ohm)                                                                                                                       |

## Test Results

### Temperature & Compliance Info

|                             |                   |
|-----------------------------|-------------------|
| Temperature Range (°C /°F)  | 28-32 / 82.4-89.6 |
| ErP Lot 3/6 Ready           | ✓                 |
| (EU) No 617/2013 Compliance | ✓                 |

### Performance Summary 115V

|                                                       |          |
|-------------------------------------------------------|----------|
| Accredited                                            |          |
| Average Efficiency (>1450 load combinations)          | 91.264%  |
| Average Noise Output (>1450 Load Combinations)        | 27.55dBA |
| Average PF (>1450 Load Combinations)                  | 0.993    |
| Efficiency With 10W ( $\leq$ 500W) or 2% (>500W) Load | 65.602%  |
| Standby Power Consumption                             | 0.0564W  |
| Non-Accredited                                        |          |
| 12V Ripple (Full Load)                                | 12.66mV  |
| 5V Ripple (Full Load)                                 | 7.08mV   |
| 3.3V Ripple (Full Load)                               | 5.79mV   |
| 5VSB Ripple (Full Load)                               | 7.09mV   |
| 12V Load Regulation                                   | 0.13%    |
| 5V Load Regulation                                    | 0.26%    |
| 3.3V Load Regulation                                  | 0.36%    |
| 5VSB Load Regulation                                  | 1.63%    |
| Inrush Current                                        | 28.812A  |


### Hold-Up Time & PWR\_OK Signal

|                                       |      |
|---------------------------------------|------|
| Hold-Up Time (ms)                     | 24.0 |
| AC Loss to PWR_OK Hold Up Time (ms)   | 21.3 |
| PWR_OK Inactive to DC Loss Delay (ms) | 2.7  |

## Vampire Power


### Graphs 115V

Power - 16509500001009610055 - 29/04/2017 - 13:11

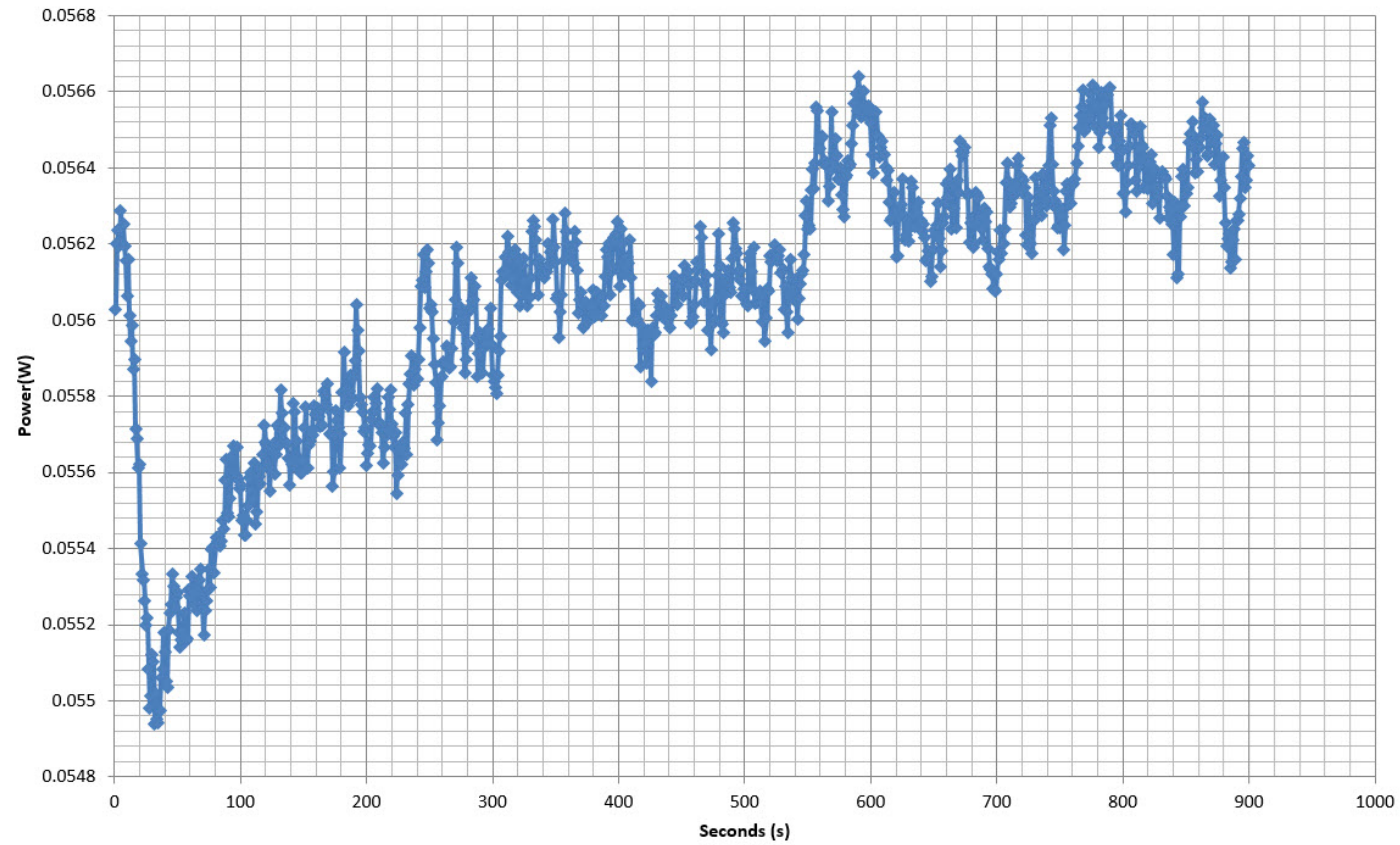

## Efficiency Graph

115V

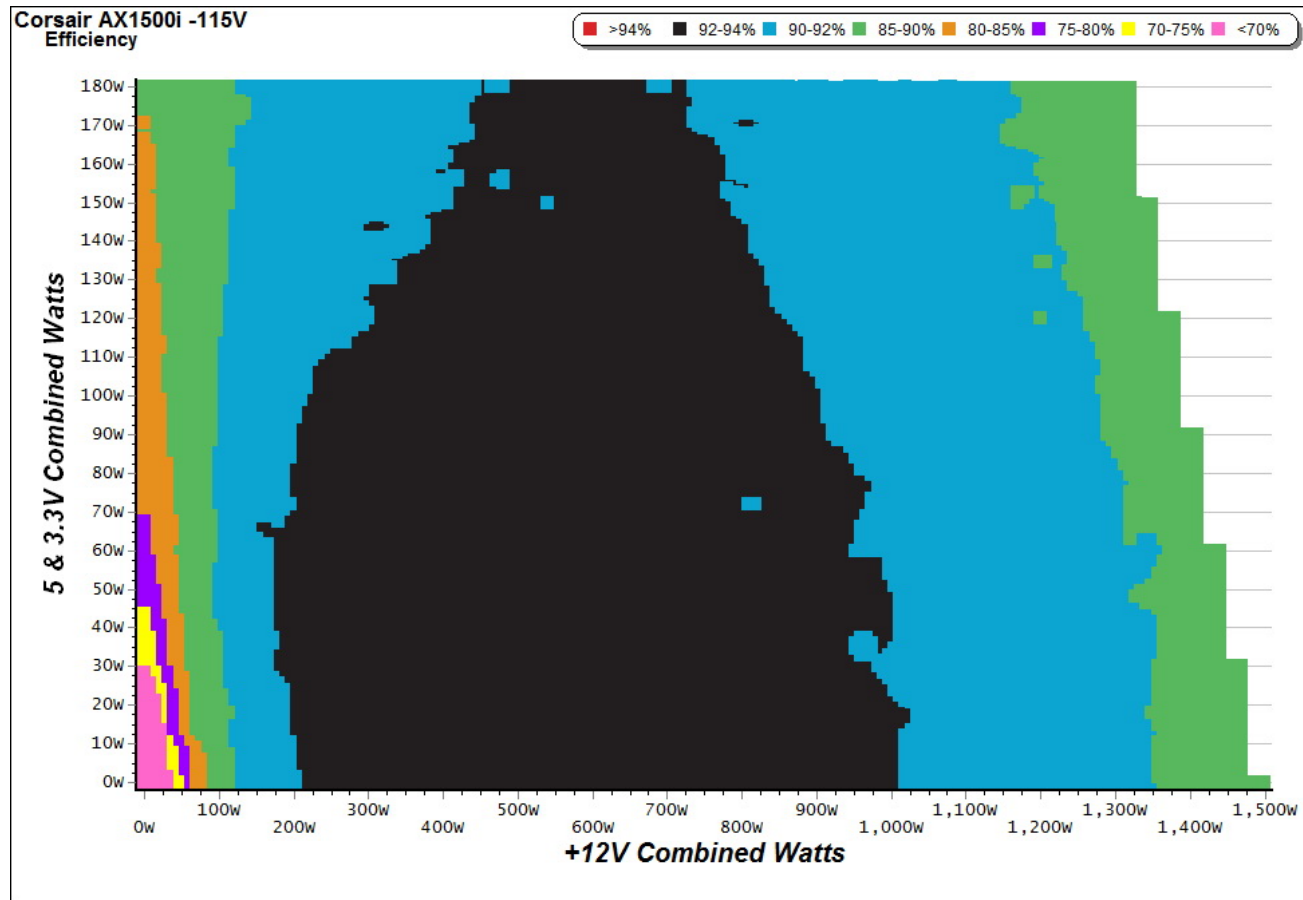


### INFO

This graph depicts the PSU's efficiency throughout its entire operational range. For the generation of the efficiency and noise graphs we set our loaders to auto mode through our custom-made software before trying thousands of possible load combinations.

## Noise Graph

115V

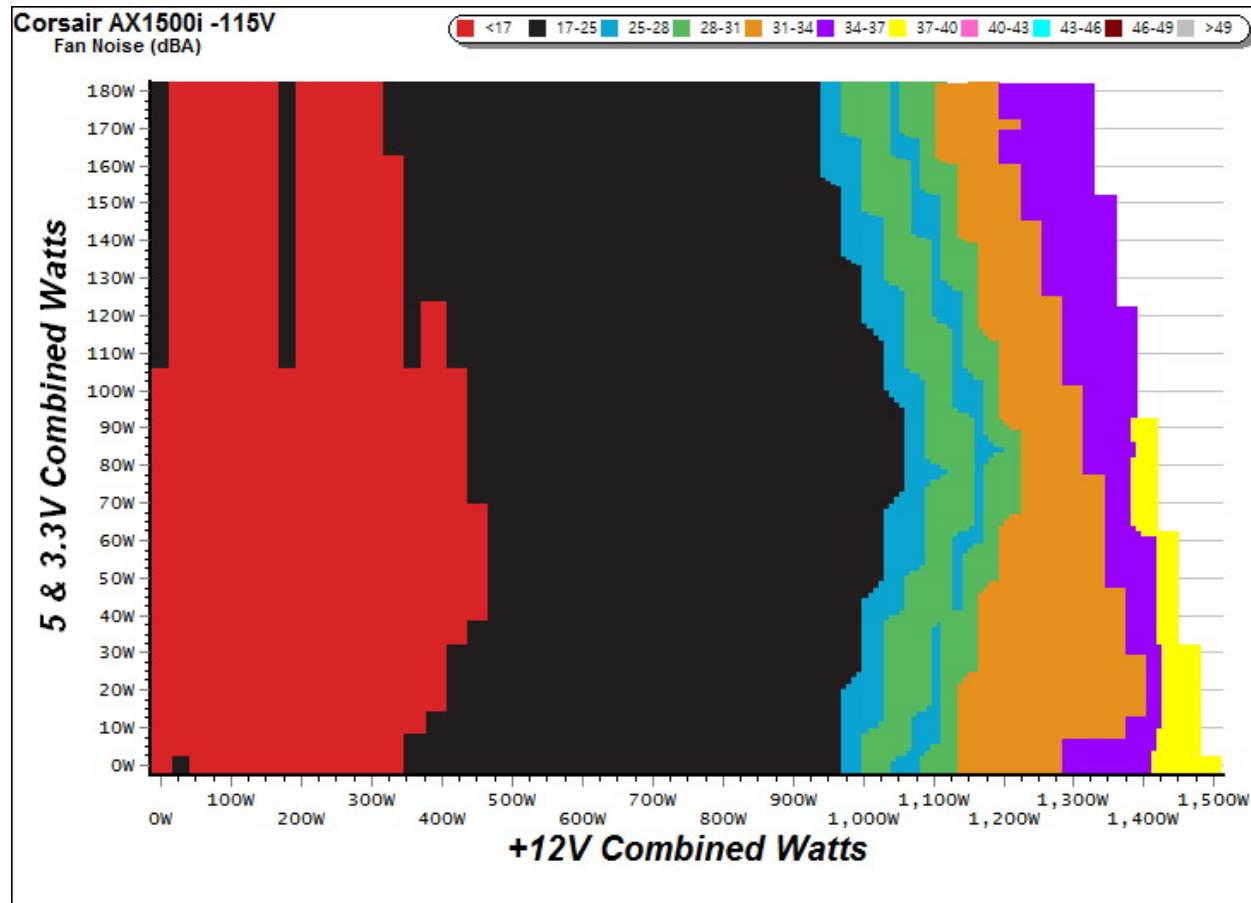

### INFO


The PSU's noise in its entire operational range and under 30-32 °C ambient is depicted in this graph. The X axis represents the load on the +12V rail(s) while the Y axis is the load on the minor rails.

## Indicative Performance

### Efficiency under high ambient temperature

Efficiency: Corsair AX1500i

Ambient: 36°C - 45°C (96.8°F - 113°F)

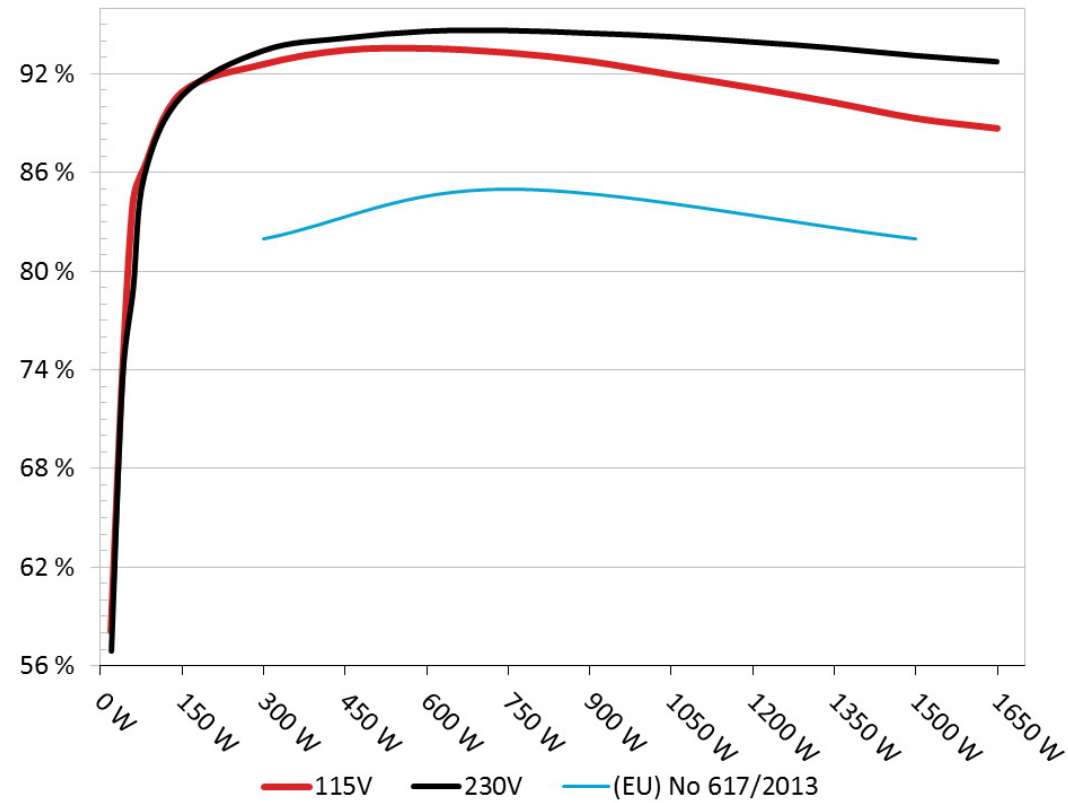


### INFO

The PSU's efficiency under high ambient temperatures with 115V and 230V input. For this graph the results of the 10-110% load regulation table are used.

## 5VSB Efficiency

5VSB Efficiency: Corsair AX1500i

Ambient: 34°C - 36°C (93.2°F - 96.8°F)

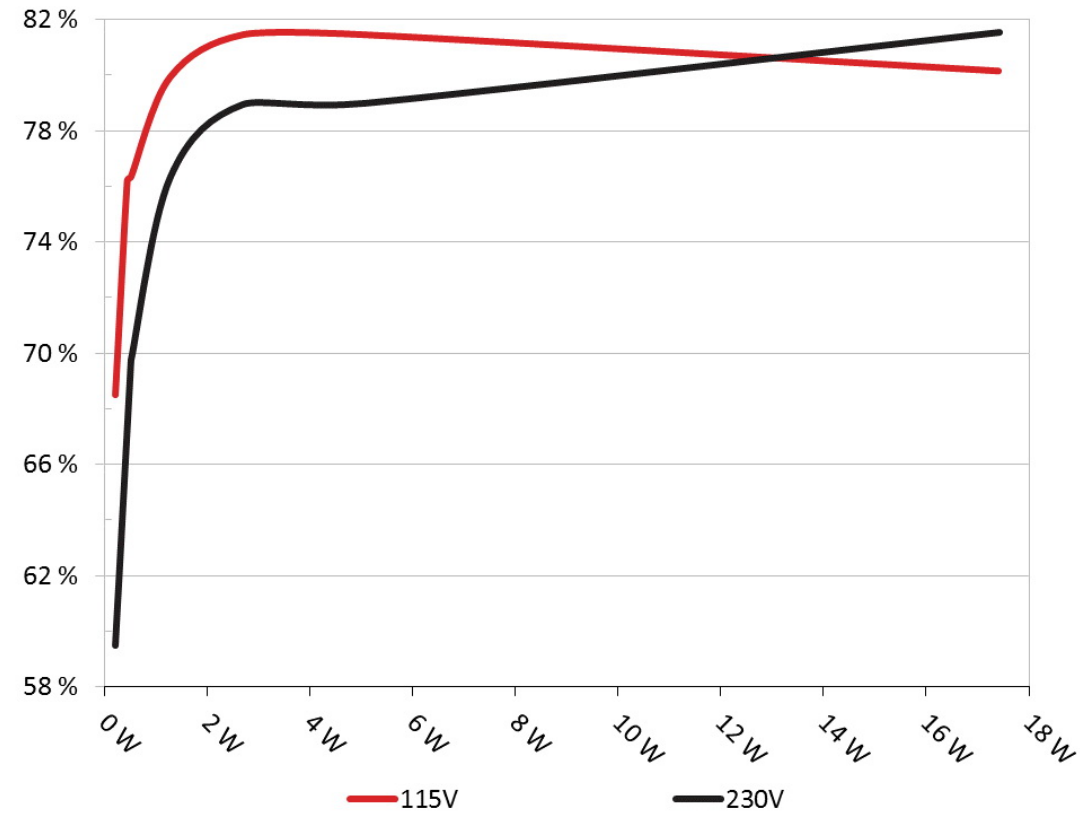

## INFO

This graph depicts the efficiency levels of the 5VSB rail with 115V and 230V input.

### 5VSB Efficiency (ERP LOT 3/6 & CEC) 115V

| Test # | 5VSB   | DC/AC (Watts) | Efficiency | PF/AC Volts |
|--------|--------|---------------|------------|-------------|
| 1      | 0.042A | 0.213         | 68.489%    | 0.016       |
|        | 5.084V | 0.311         |            | 115.12V     |

|   |        |        |         |         |
|---|--------|--------|---------|---------|
| 2 | 0.088A | 0.445  | 76.199% | 0.029   |
|   | 5.083V | 0.584  |         | 115.13V |
| 3 | 0.532A | 2.697  | 79.534% | 0.158   |
|   | 5.069V | 3.391  |         | 115.12V |
| 4 | 3.502A | 17.415 | 80.150% | 0.502   |
|   | 4.973V | 21.728 |         | 115.11V |

## Supplementary Tests (For Reference)

### Typical Load Tests 115V

| Load Regulation & Efficiency Tests<br>Nidus 500 PG-5001-BR -115V |          |        |        |        |               |            |                 |                   |                |             |
|------------------------------------------------------------------|----------|--------|--------|--------|---------------|------------|-----------------|-------------------|----------------|-------------|
| Test #                                                           | 12V      | 5V     | 3.3V   | 5VSB   | DC/AC (Watts) | Efficiency | Fan Speed (RPM) | PSU Noise (dB[A]) | Temps (In/Out) | PF/AC Volts |
| 1                                                                | 10.693A  | 2.006A | 1.999A | 1.006A | 149.780       | 90.853%    | 0000            | <6.0              | 46.44°C        | 0.986       |
|                                                                  | 11.992V  | 4.984V | 3.296V | 4.961V | 164.859       |            |                 |                   | 38.49°C        | 115.11V     |
| 2                                                                | 22.435A  | 3.012A | 3.004A | 1.211A | 299.751       | 92.568%    | 0000            | <6.0              | 47.01°C        | 0.986       |
|                                                                  | 11.986V  | 4.977V | 3.293V | 4.951V | 323.817       |            |                 |                   | 38.94°C        | 115.12V     |
| 3                                                                | 34.491A  | 3.515A | 3.521A | 1.415A | 449.757       | 93.426%    | 0000            | <6.0              | 47.12°C        | 0.992       |
|                                                                  | 11.995V  | 4.973V | 3.291V | 4.944V | 481.402       |            |                 |                   | 39.64°C        | 115.13V     |
| 4                                                                | 46.544A  | 4.027A | 4.011A | 1.618A | 599.596       | 93.529%    | 0000            | <6.0              | 40.40°C        | 0.994       |
|                                                                  | 11.999V  | 4.971V | 3.289V | 4.938V | 641.079       |            |                 |                   | 44.38°C        | 115.12V     |
| 5                                                                | 58.260A  | 5.014A | 5.010A | 1.818A | 749.457       | 93.271%    | 0000            | <6.0              | 40.74°C        | 0.995       |
|                                                                  | 11.999V  | 4.981V | 3.292V | 4.945V | 803.526       |            |                 |                   | 44.58°C        | 115.13V     |
| 6                                                                | 70.003A  | 6.030A | 6.023A | 2.023A | 899.392       | 92.747%    | 0000            | <6.0              | 41.47°C        | 0.996       |
|                                                                  | 11.994V  | 4.977V | 3.287V | 4.938V | 969.727       |            |                 |                   | 45.16°C        | 115.12V     |
| 7                                                                | 81.775A  | 7.040A | 7.031A | 2.230A | 1049.260      | 91.937%    | 0000            | <6.0              | 42.62°C        | 0.997       |
|                                                                  | 11.987V  | 4.971V | 3.284V | 4.930V | 1141.285      |            |                 |                   | 46.36°C        | 115.12V     |
| 8                                                                | 93.533A  | 8.034A | 8.023A | 2.431A | 1199.262      | 91.136%    | 0000            | <6.0              | 43.65°C        | 0.998       |
|                                                                  | 11.984V  | 4.981V | 3.289V | 4.936V | 1315.910      |            |                 |                   | 47.33°C        | 115.12V     |
| 9                                                                | 105.692A | 8.545A | 8.547A | 2.431A | 1349.343      | 90.239%    | 0000            | <6.0              | 45.02°C        | 0.998       |
|                                                                  | 11.987V  | 4.976V | 3.287V | 4.933V | 1495.303      |            |                 |                   | 48.81°C        | 115.13V     |

|     |          |         |         |        |          |         |      |      |         |         |
|-----|----------|---------|---------|--------|----------|---------|------|------|---------|---------|
| 10  | 117.413A | 9.055A  | 9.042A  | 3.569A | 1499.188 | 89.278% | 0000 | <6.0 | 46.02°C | 0.998   |
|     | 11.984V  | 4.975V  | 3.285V  | 4.901V | 1679.245 |         |      |      | 49.61°C | 115.12V |
| 11  | 129.906A | 9.056A  | 9.043A  | 3.569A | 1649.181 | 88.672% | 0000 | <6.0 | 45.07°C | 0.998   |
|     | 11.985V  | 4.973V  | 3.284V  | 4.901V | 1859.873 |         |      |      | 49.57°C | 115.12V |
| CL1 | 0.099A   | 22.030A | 19.998A | 0.004A | 176.532  | 84.649% | 0000 | <6.0 | 44.42°C | 0.982   |
|     | 11.991V  | 4.971V  | 3.290V  | 5.010V | 208.547  |         |      |      | 48.05°C | 115.13V |
| CL2 | 124.927A | 1.003A  | 1.003A  | 1.002A | 1508.590 | 89.275% | 0000 | <6.0 | 46.28°C | 0.998   |
|     | 11.970V  | 4.984V  | 3.295V  | 4.965V | 1689.825 |         |      |      | 49.69°C | 115.13V |

The results above are not used in the certification process

### Light Load Tests 115V

| Efficiency at Low Loads<br>Nidus 500 PG-5001-BR -115V |         |        |        |        |               |            |                 |                   |             |
|-------------------------------------------------------|---------|--------|--------|--------|---------------|------------|-----------------|-------------------|-------------|
| Test #                                                | 12V     | 5V     | 3.3V   | 5VSB   | DC/AC (Watts) | Efficiency | Fan Speed (RPM) | PSU Noise (dB[A]) | PF/AC Volts |
| 1                                                     | 1.217A  | 0.502A | 0.483A | 0.202A | 19.709        | 58.103%    | 0000            | <6.0              | 0.896       |
|                                                       | 12.003V | 4.988V | 3.294V | 4.982V | 33.921        |            |                 |                   | 115.12V     |
| 2                                                     | 2.460A  | 1.001A | 1.000A | 0.400A | 39.791        | 73.101%    | 0000            | <6.0              | 0.953       |
|                                                       | 11.999V | 4.984V | 3.294V | 4.974V | 54.433        |            |                 |                   | 115.12V     |
| 3                                                     | 3.702A  | 1.497A | 1.514A | 4.967A | 59.840        | 84.034%    | 0000            | <6.0              | 0.967       |
|                                                       | 11.996V | 4.980V | 3.293V | 4.967V | 71.209        |            |                 |                   | 115.12V     |
| 4                                                     | 4.940A  | 2.009A | 2.003A | 0.805A | 79.835        | 86.211%    | 0000            | <6.0              | 0.978       |
|                                                       | 11.994V | 4.977V | 3.291V | 4.960V | 92.604        |            |                 |                   | 115.11V     |

The results above are not used in the certification process

### Ripple Measurements 115V

| Test     | 12V    | 5V     | 3.3V   | 5VSB   | Pass/Fail |
|----------|--------|--------|--------|--------|-----------|
| 10% Load | 5.6 mV | 5.6 mV | 4.0 mV | 3.1 mV | Pass      |
| 20% Load | 8.3 mV | 8.2 mV | 4.6 mV | 7.6 mV | Pass      |
| 30% Load | 9.3 mV | 5.0 mV | 4.2 mV | 3.8 mV | Pass      |
| 40% Load | 9.7 mV | 4.6 mV | 4.3 mV | 4.2 mV | Pass      |

| Test        | 12V     | 5V      | 3.3V   | 5VSB    | Pass/Fail |
|-------------|---------|---------|--------|---------|-----------|
| 50% Load    | 10.0 mV | 4.9 mV  | 4.2 mV | 4.8 mV  | Pass      |
| 60% Load    | 9.4 mV  | 12.4 mV | 5.8 mV | 12.1 mV | Pass      |
| 70% Load    | 9.7 mV  | 8.8 mV  | 4.7 mV | 8.0 mV  | Pass      |
| 80% Load    | 9.8 mV  | 6.2 mV  | 4.6 mV | 5.3 mV  | Pass      |
| 90% Load    | 10.9 mV | 6.9 mV  | 5.1 mV | 6.7 mV  | Pass      |
| 100% Load   | 12.7 mV | 7.1 mV  | 5.8 mV | 7.1 mV  | Pass      |
| 110% Load   | 13.3 mV | 7.2 mV  | 6.2 mV | 7.4 mV  | Pass      |
| Crossload 1 | 19.5 mV | 10.9 mV | 7.4 mV | 6.2 mV  | Pass      |
| Crossload 2 | 12.5 mV | 5.3 mV  | 5.1 mV | 7.6 mV  | Pass      |

The results above are not used in the certification process

A black Corsair AX1500i power supply unit is shown from a three-quarter perspective. The unit features a large circular fan on the top and a mesh-covered intake on the front. The Corsair logo and 'AX1500i' are printed on the side. The front panel includes a power switch and a power input socket.

CYBENETICS LTD Syrou 6, Latsia, 2231, Nicosia Cyprus

[illegible]

Cybenetics runs voluntary certification programs for power supplies - ETA for efficiency, LAMBDA for noise and SAFE for safety and correct operation - and for cooling products, with DELTA for chassis soundproofing and PHI for fan airflow and static pressure. THETA rates cooler performance on AMD AM5 and Intel LGA1851 outside ISO 17065 and accreditation scope

www.cybenetics.com - info@cybenetics.com