



## SilverStone Strider Titanium 600W


Serial Number 155200448

Lab ID 128

Certification ID 25128

Test Result Report ID:

Certificate Issue Date: Jun 20, 2018

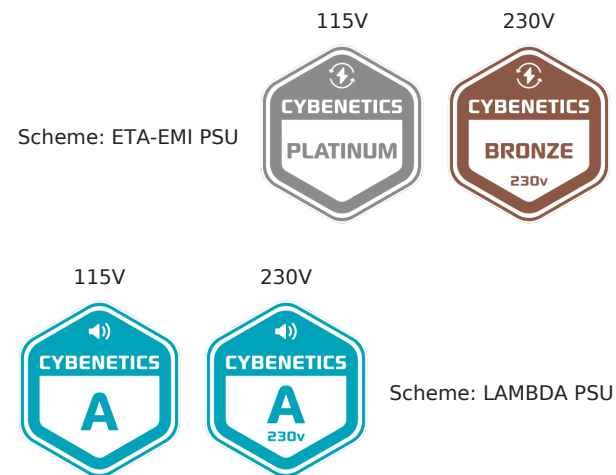

Aristeidis Bitziopoulos, Certification Body General Manager

## General Information

### Test Equipment

|                       |                                                                                     |
|-----------------------|-------------------------------------------------------------------------------------|
| Electronic Loads      | Chroma 63601-5 x2<br>Chroma 63600-2<br>Chroma 63640-80-80 x10<br>Chroma 63610-80-20 |
| AC Sources            | Chroma 6530, APM SP300VAC4000W-P, GW Instek ASR-3500                                |
| Power Analyzers       | Rohde & Schwarz HMC8015 & NPA701                                                    |
| Oscilloscopes         | Picoscope 4444, Siglent SDS2104X PLUS                                               |
| Sound Analyzer        | Bruel & Kjaer 2270 G4                                                               |
| Microphone            | Bruel & Kjaer Type 4955-A                                                           |
| Temperature Logger    | Picoscope TC-08                                                                     |
| Tachometer            | UNI-T UT372                                                                         |
| Multimeters           | Keysight 34465A                                                                     |
| EMI Analyzer          | TekBox TBMR-110M-EU                                                                 |
| Isolation Transformer | 4kVA                                                                                |
| UPS                   | FSP Champ Tower 3kVA, CyberPower OLS3000E 3kVA                                      |
| Testing Methodology   | Cybenetics PSU Test Protocol                                                        |

### DUT Information(Non-accredited measurements)

|                                   |                       |
|-----------------------------------|-----------------------|
| Product Identification Details    |                       |
| Brand                             | SilverStone           |
| Model                             | Strider Titanium 600W |
| OEM/ODM                           | Enhance Electronics   |
| Serial Number                     | 155200448             |
| Product Specifications            |                       |
| Manufacturer-Provided Information |                       |
| Rated Voltage (Vrms)              | 100-240               |
| Rated Current (Arms)              | 9-4.5                 |
| Rated Frequency (Hz)              | 50-60                 |

|                                                   |                                                                                     |
|---------------------------------------------------|-------------------------------------------------------------------------------------|
| Rated Power (W)                                   | 600                                                                                 |
| Operating Temperature (Continuous Full Load) (°C) |                                                                                     |
| Type                                              | ATX12V                                                                              |
| Cable Design                                      | Fully Modular                                                                       |
| Warranty                                          | -                                                                                   |
| Cybenetics Measurements                           |                                                                                     |
| Dimensions (W x H x D)                            |                                                                                     |
| Weight                                            |                                                                                     |
| Cooling                                           | 120mm Fluid Dymanic Bearing Fan<br>(HA1225H12F-Z)                                   |
| Semi-Passive Operation                            | X                                                                                   |
| Cybenetics Testing Information                    |                                                                                     |
| Lab ID                                            | 128                                                                                 |
| Date of receipt                                   | Jun 4, 2018                                                                         |
| Testing Date                                      | Jun 16, 2018                                                                        |
| Report Issued Date                                | Jun 20, 2018                                                                        |
| Engineer Name                                     | -                                                                                   |
| Authorized By the Laboratory Technical Manager    | Aristeidis Bitziopoulos                                                             |
| Signature                                         |  |

### Cables and Connectors(Non-accredited measurements)

| Modular Cables                  |             |                         |          |
|---------------------------------|-------------|-------------------------|----------|
| Description                     | Cable Count | Connector Count (Total) | Gauge    |
| ATX connector 20+4 pin (560mm)  | 1           | 1                       | 18-22AWG |
| 4+4 pin EPS12V (755mm)          | 1           | 1                       | 18AWG    |
| 6 pin PCIe (560mm)              | 2           | 2                       | 18AWG    |
| 6+2 pin PCIe (560mm)            | 2           | 2                       | 18AWG    |
| SATA (600mm+140mm+140mm+140mm)  | 2           | 8                       | 18AWG    |
| 4 pin Molex (610mm+150mm+150mm) | 1           | 3                       | 18AWG    |
| FDD Adapter (+105mm)            | 1           | 1                       | 22AWG    |

## Power Specifications

|                      |       |      |    |     |      |      |
|----------------------|-------|------|----|-----|------|------|
| Rail                 |       | 3.3V | 5V | 12V | 5VSB | -12V |
| Max. Power           | Amps  | 20   | 20 | 49  | 2.5  | 0.3  |
|                      | Watts | 100  |    | 588 | 12.5 | 3.6  |
| Total Max. Power (W) |       | 600  |    |     |      |      |

## Parts Description

|                      |                                                                                                                                                            |
|----------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Primary Side         |                                                                                                                                                            |
| Transient Filter     | 4x Y caps, 4x X caps, 2x CM chokes, 1x MOV                                                                                                                 |
| Inrush Protection    | NTC Thermistor                                                                                                                                             |
| Bridge Rectifier(s)  | 2x Vishay BU1506 (600V, 15A @ 150°C)                                                                                                                       |
| APFC MOSFETS         | 2x Infineon IPP50R140CP (550V, 15A @ 100°C, 0.14 Ohm)                                                                                                      |
| APFC Boost Diode     | 1x CREE C3D08060A (600V, 8A @ 152°C)                                                                                                                       |
| Hold-up Cap(s)       | 1x Nippon Chemi-Con (450V, 470uF, 2000h @ 105°C, KMQ)                                                                                                      |
| Main Switchers       | 2x Infineon IPP50R140CP (550V, 15A @ 100°C, 0.14 Ohm)<br>Driver IC: 1x Silicon Labs Si8230BD                                                               |
| APFC Controller      | Champion CM6502S & CM03X Green PFC controller                                                                                                              |
| Switching Controller | Champion CM6901                                                                                                                                            |
| Topology             | Primary side: Half-Bridge & LLC Resonant Converter<br>Secondary side: Synchronous Rectification & DC-DC converters                                         |
| Secondary Side       |                                                                                                                                                            |
| +12V MOSFETS         | 8x Infineon BSC014N04LS (40V, 100A @ 100°C, 1.4 mOhm)                                                                                                      |
| 5V & 3.3V            | DC-DC Converters:<br>2x BSC050NE2LS FETs (25V, 37A @ 100°C, 5.0mΩ)<br>2x BSC018NE2LS FETs (25V, 97A @ 100°C, 1.8mΩ)<br>PWM Controller: 2x APW7073          |
| Filtering Capacitors | Electrolytics: Nippon Chemi-Con (105°C, KY 4,000-10,000h, KZH 5,000-6,000h), Rubycon (105°C, ZLH 6,000-10,000h, YXG 3,000-6,000h)<br>Polymers: Unicon (TW) |
| Supervisor IC        | SITI PS223 (OVP, UVP, OCP, SCP, OTP )                                                                                                                      |
| Fan Model            | Hong Hua HA1225H12F-Z (120mm, 12V, 0.58A, 2200RPM, Fluid Dynamic Bearing)                                                                                  |
| 5VSB Circuit         |                                                                                                                                                            |
| Rectifier            | 1x PFR10V45CT & 1x SG30N04D                                                                                                                                |

|                        |                   |
|------------------------|-------------------|
| Standby PWM Controller | Sanken STR-A6069H |
|------------------------|-------------------|

## Test Results

### Temperature & Compliance Info

|                             |                                                                     |
|-----------------------------|---------------------------------------------------------------------|
| Temperature Range (°C /°F)  | 28-32 / 82.4-89.6                                                   |
| ErP Lot 3/6 Ready           | ErP Lot 6 2010: ✓<br>ErP Lot 6 2013: ✓<br>ErP Lot 3 2014: Partially |
| (EU) No 617/2013 Compliance | ✓                                                                   |

### Performance Summary

#### 115V

|                                                |          |
|------------------------------------------------|----------|
| Accredited                                     |          |
| Average Efficiency (>1450 load combinations)   | 91.801%  |
| Average Noise Output (>1450 Load Combinations) | 21.10dBA |
| Average PF (>1450 Load Combinations)           | 0.975    |
| Efficiency With 10W (≤500W) or 2% (>500W) Load | -        |
| Standby Power Consumption                      | 0.0587W  |
| Non-Accredited                                 |          |
| 12V Ripple (Full Load)                         | 66.17mV  |
| 5V Ripple (Full Load)                          | 18.81mV  |
| 3.3V Ripple (Full Load)                        | 36.68mV  |
| 5VSB Ripple (Full Load)                        | 15.79mV  |
| 12V Load Regulation                            | 0.37%    |
| 5V Load Regulation                             | 1.52%    |
| 3.3V Load Regulation                           | 2.32%    |
| 5VSB Load Regulation                           | 2.70%    |
| Inrush Current                                 | 89.963A  |

## 230V

|                                                |          |   |
|------------------------------------------------|----------|---|
| Accredited                                     |          |   |
| Average Efficiency (>1450 load combinations)   | 92.961%  |   |
| Average Noise Output (>1450 Load Combinations) | 20.79dBA |   |
| Average PF (>1450 Load Combinations)           | 0.910    |   |
| Efficiency With 10W (≤500W) or 2% (>500W) Load | -        |   |
| Standby Power Consumption                      | 0.0943W  |   |
| Non-Accredited                                 |          |   |
| 12V Ripple (Full Load)                         | 55.81mV  |   |
| 5V Ripple (Full Load)                          | 14.94mV  |   |
| 3.3V Ripple (Full Load)                        | 29.26mV  |   |
| 5VSB Ripple (Full Load)                        | 8.23mV   |   |
| 12V Load Regulation                            | 0.10%    |   |
| 5V Load Regulation                             | 1.30%    |   |
| 3.3V Load Regulation                           | 2.09%    |   |
| 5VSB Load Regulation                           | 2.59%    |   |
| Inrush Current                                 | 61.642A  |   |
| Hold-Up Time & PWR_OK Signal                   | 14.30ms  |   |
| AC Loss to PWR_OK Hold Up Time                 | 19.70ms  |   |
| PWR_OK Inactive to DC Loss Delay               | -5.40ms  |   |
| OPP (0.00°C / 0.00°C)                          | -        | - |

## Hold-Up Time & PWR\_OK Signal


|                                       |      |
|---------------------------------------|------|
| Hold-Up Time (ms)                     | 14.3 |
| AC Loss to PWR_OK Hold Up Time (ms)   | 19.7 |
| PWR_OK Inactive to DC Loss Delay (ms) | -5.4 |



## Graphs


115V

Power - 155200448 - 19/06/2017 - 12:05

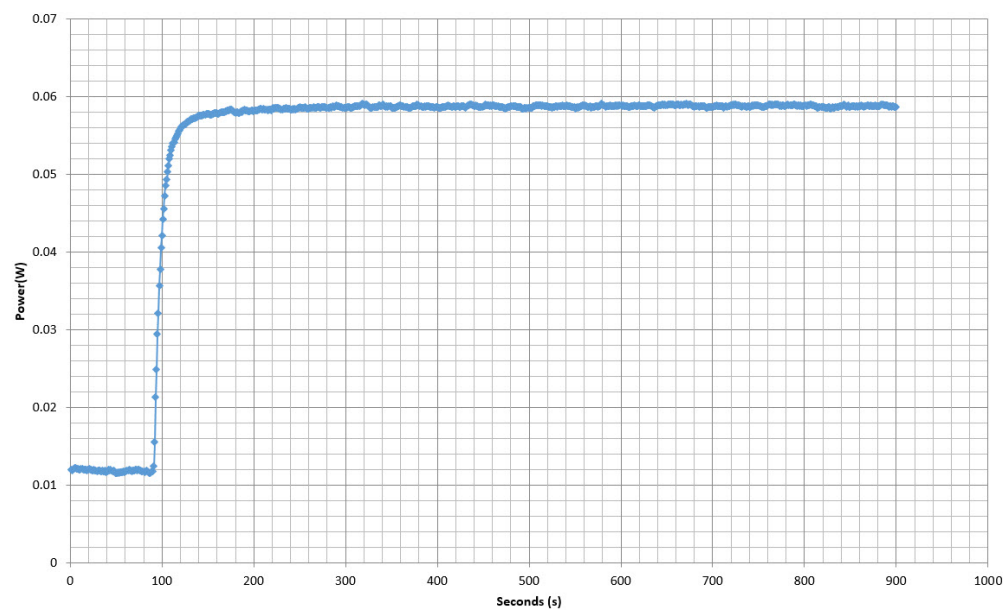


230V

Power - 155200448 - 19/06/2017 - 12:05

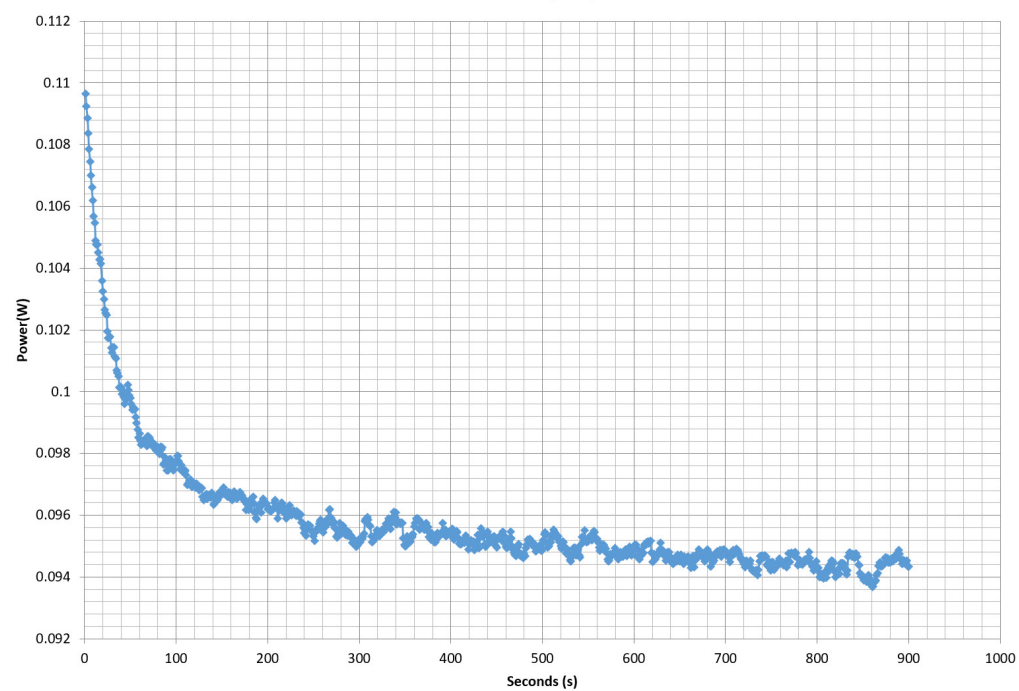

## Efficiency Graph


115V

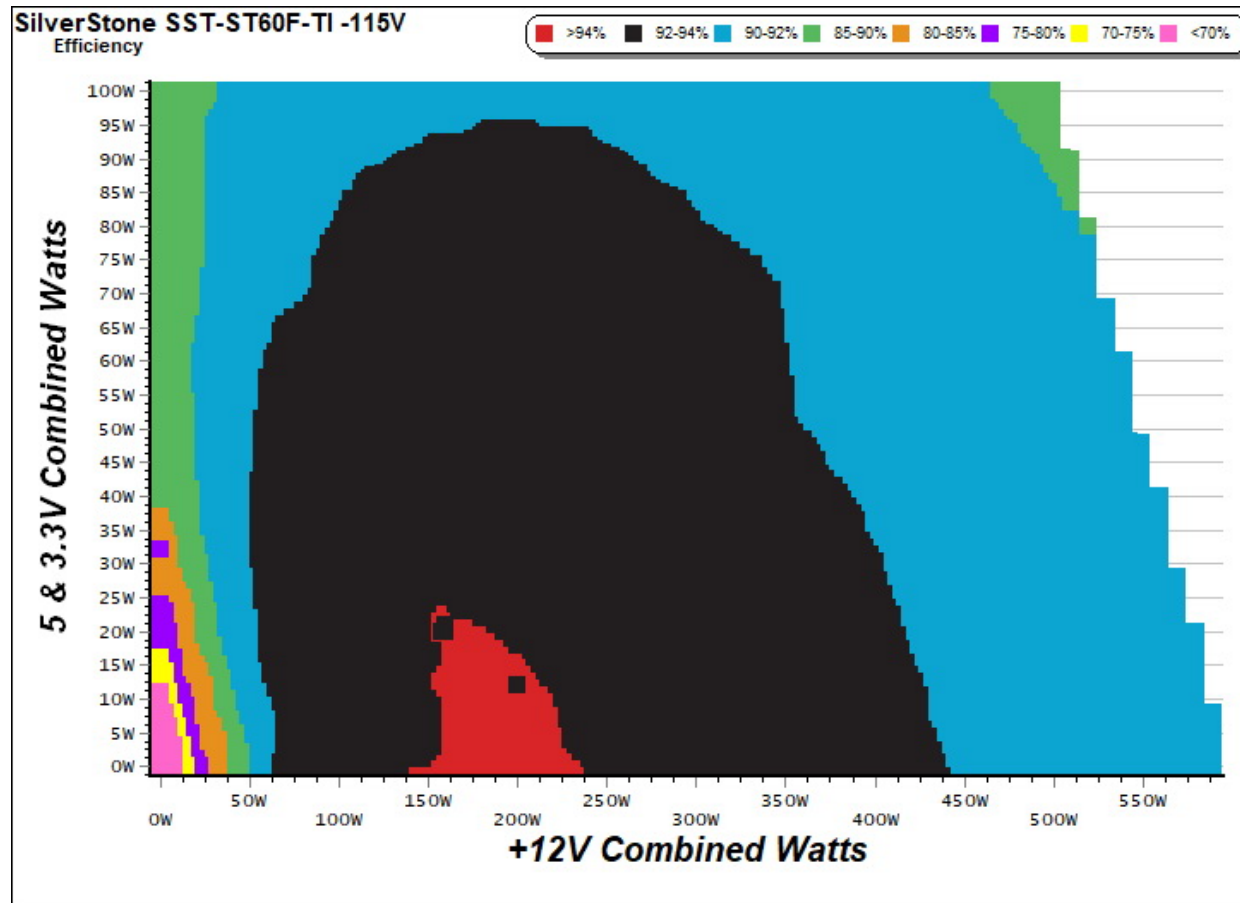

### INFO

This graph depicts the PSU's efficiency throughout its entire operational range. For the generation of the efficiency and noise graphs we set our loaders to auto mode through our custom-made software before trying thousands of possible load combinations.

## 230V

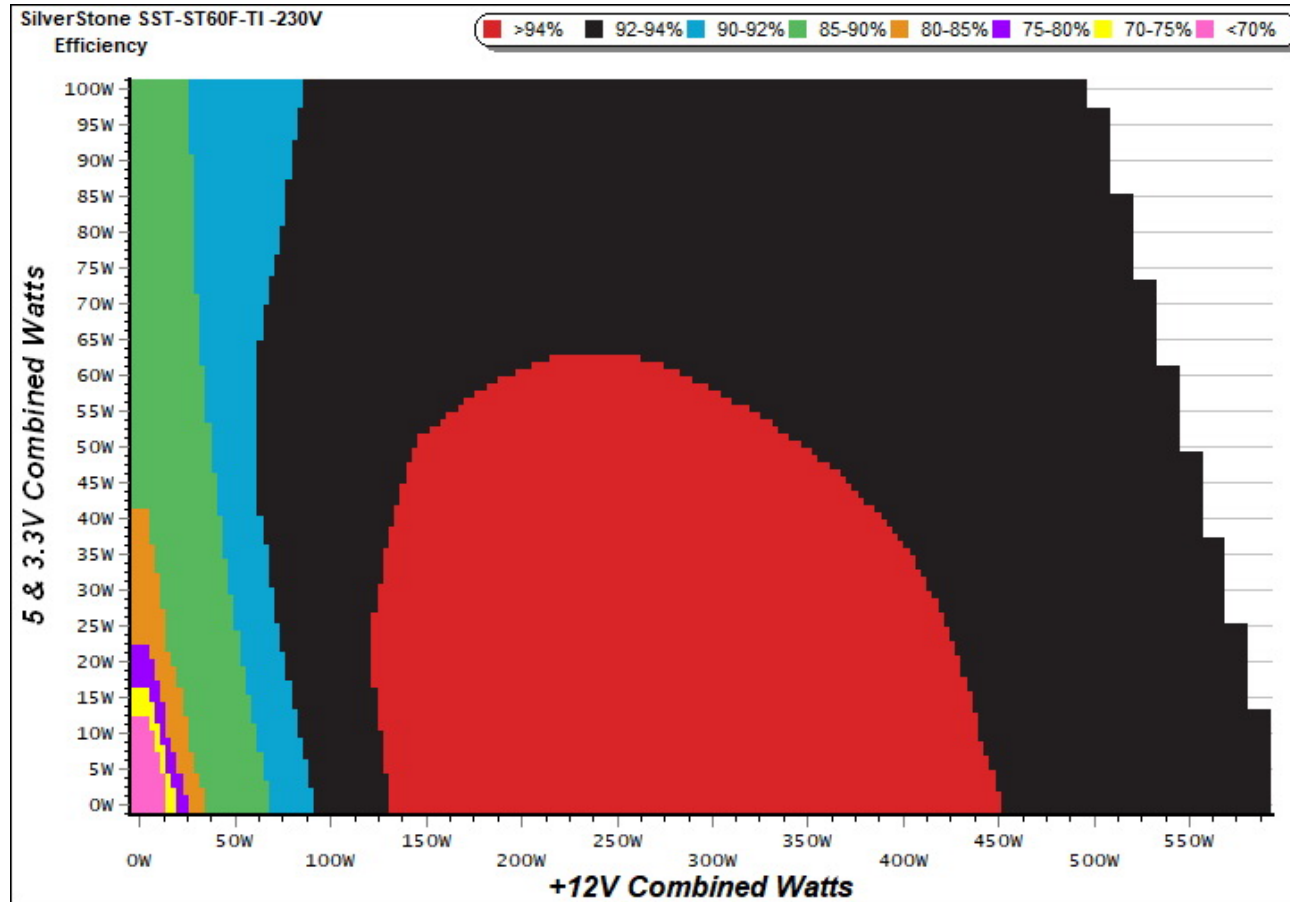


### INFO

This graph depicts the PSU's efficiency throughout its entire operational range. For the generation of the efficiency and noise graphs we set our loaders to auto mode through our custom-made software before trying thousands of possible load combinations.

# Noise Graph


115V

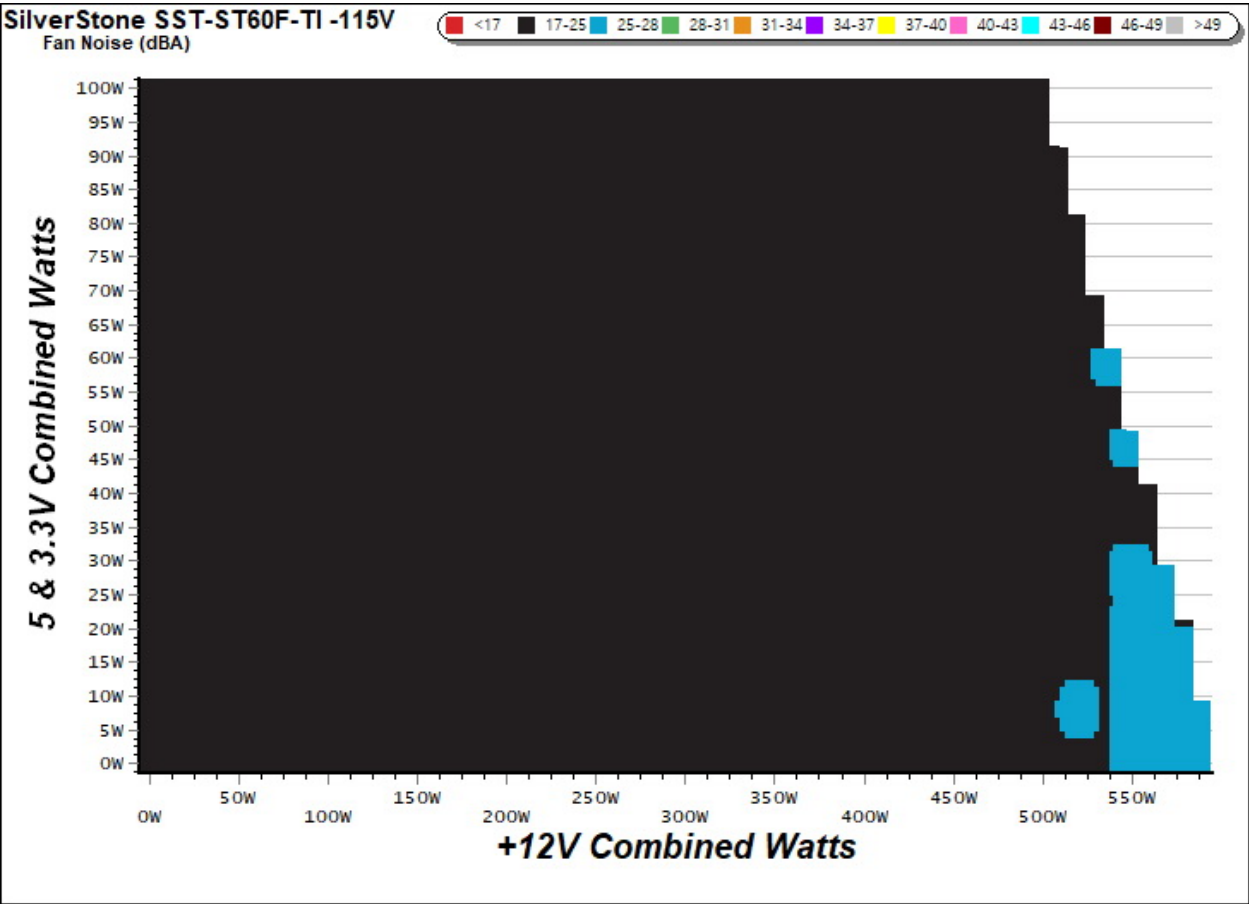

## INFO

The PSU`s noise in its entire operational range and under 30-32 °C ambient is depicted in this graph. The X axis represents the load on the +12V rail(s) while the Y axis is the load on the minor rails.

## 230V

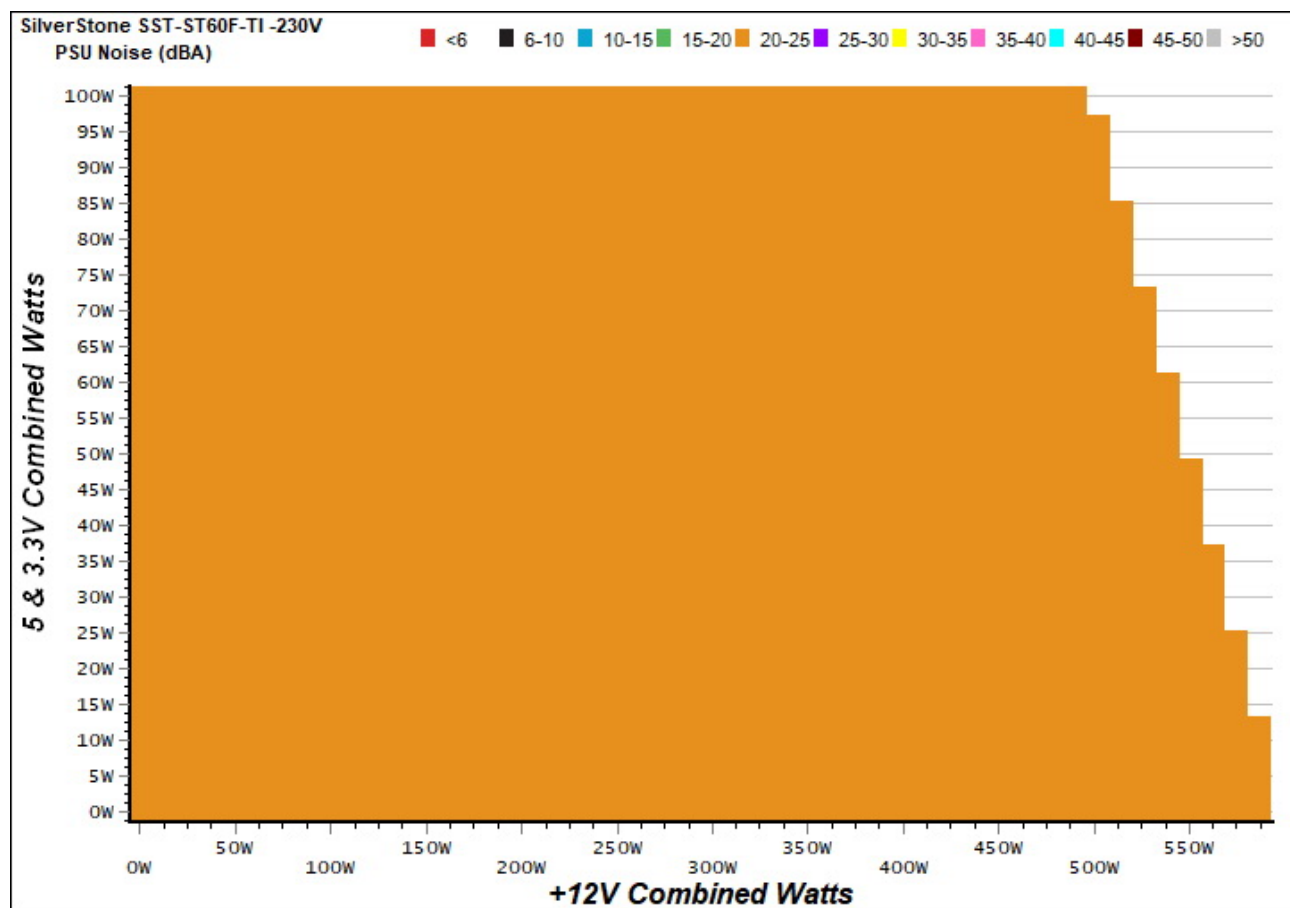

## INFO


The PSU's noise in its entire operational range and under 30-32 °C ambient is depicted in this graph. The X axis represents the load on the +12V rail(s) while the Y axis is the load on the minor rails.

## Indicative Performance

### Efficiency under high ambient temperature

Efficiency: SilverStone SST-ST60F-TI

Ambient: 37°C - 46°C (98.6°F - 114.8°F)

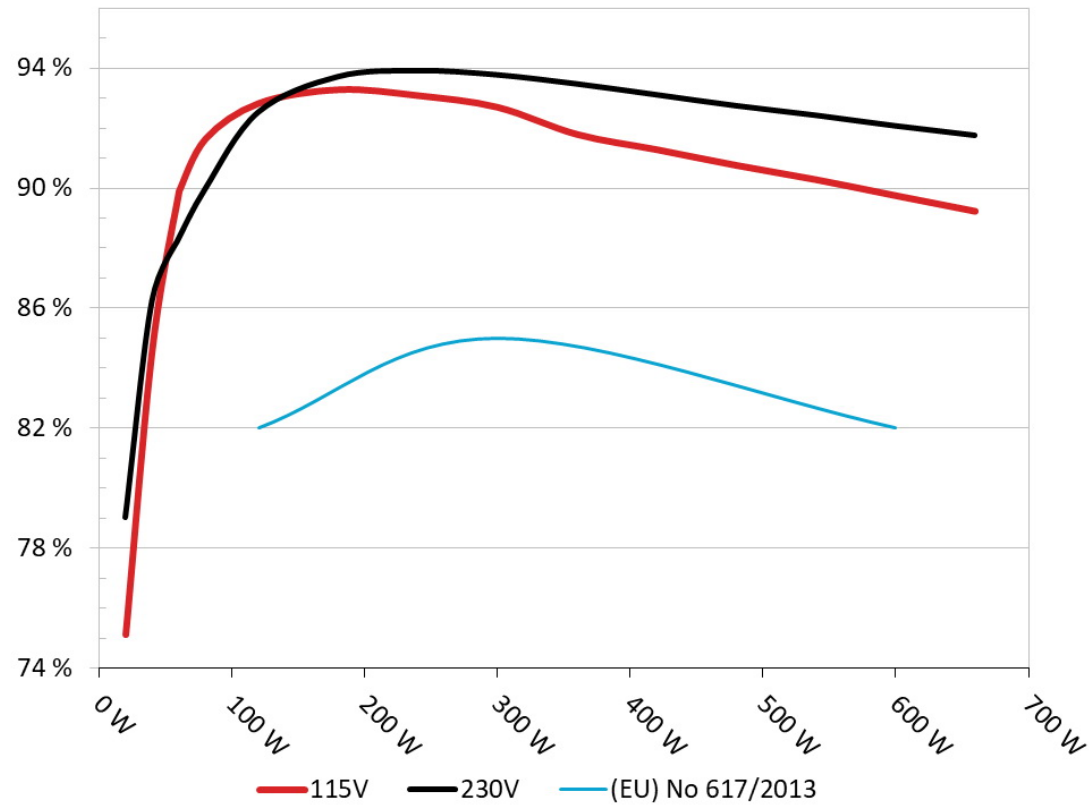


### INFO

The PSU's efficiency under high ambient temperatures with 115V and 230V input. For this graph the results of the 10-110% load regulation table are used.

## 5VSB Efficiency

### 5VSB Efficiency: SilverStone SST-ST60F-TI

Ambient: 34°C - 36°C (93.2°F - 96.8°F)

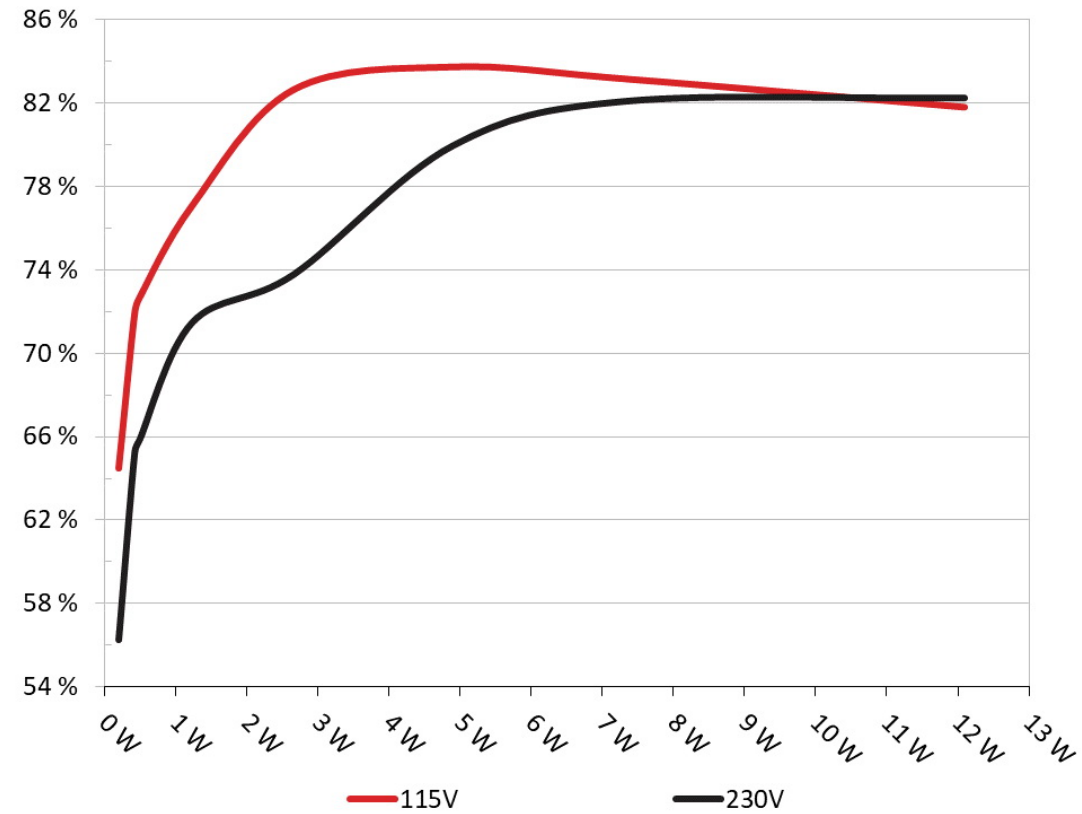

## INFO

This graph depicts the efficiency levels of the 5VSB rail with 115V and 230V input.

### 5VSB Efficiency (ERP LOT 3/6 & CEC)

#### 115V

| Test # | 5VSB   | DC/AC (Watts) | Efficiency | PF/AC Volts |
|--------|--------|---------------|------------|-------------|
| 1      | 0.042A | 0.205         | 64.465%    | 0.021       |
|        | 4.935V | 0.318         |            | 115.14V     |
| 2      | 0.086A | 0.426         | 71.838%    | 0.040       |
|        | 4.933V | 0.593         |            | 115.13V     |
| 3      | 0.542A | 2.663         | 82.651%    | 0.185       |
|        | 4.913V | 3.222         |            | 115.12V     |
| 4      | 1.002A | 4.903         | 83.740%    | 0.274       |
|        | 4.894V | 5.855         |            | 115.12V     |
| 5      | 1.502A | 7.317         | 83.167%    | 0.330       |
|        | 4.873V | 8.798         |            | 115.13V     |
| 6      | 2.502A | 12.088        | 81.808%    | 0.387       |
|        | 4.832V | 14.776        |            | 115.13V     |

#### 230V

| Test # | 5VSB   | DC/AC (Watts) | Efficiency | PF/AC Volts |
|--------|--------|---------------|------------|-------------|
| 1      | 0.042A | 0.206         | 56.284%    | 0.007       |
|        | 4.935V | 0.366         |            | 230.35V     |
| 2      | 0.087A | 0.430         | 65.250%    | 0.013       |
|        | 4.933V | 0.659         |            | 230.36V     |
| 3      | 0.542A | 2.664         | 73.795%    | 0.071       |
|        | 4.914V | 3.610         |            | 230.35V     |
| 4      | 1.002A | 4.905         | 79.977%    | 0.115       |
|        | 4.895V | 6.133         |            | 230.35V     |
| 5      | 1.502A | 7.321         | 82.102%    | 0.159       |
|        | 4.875V | 8.917         |            | 230.35V     |
| 6      | 2.501A | 12.093        | 82.260%    | 0.229       |
|        | 4.835V | 14.701        |            | 230.35V     |

## Supplementary Tests (For Reference)

### Typical Load Tests

#### 115V

| Test # | 12V     | 5V      | 3.3V    | 5VSB   | DC/AC (Watts) | Efficiency | Fan Speed (RPM) | Fan Noise (dB[A]) | Temps (In/Out) | PF/AC Volts |
|--------|---------|---------|---------|--------|---------------|------------|-----------------|-------------------|----------------|-------------|
| 1      | 3.211A  | 1.994A  | 1.969A  | 1.006A | 59.812        | 89.896%    | 964             | 24.4              | 38.43°C        | 0.919       |
|        | 11.904V | 5.010V  | 3.350V  | 4.972V | 66.535        |            |                 |                   | 40.45°C        | 115.14V     |
| 2      | 7.475A  | 2.993A  | 2.959A  | 1.206A | 119.776       | 92.816%    | 1133            | 25.5              | 38.68°C        | 0.952       |
|        | 11.898V | 5.002V  | 3.341V  | 4.960V | 129.047       |            |                 |                   | 41.01°C        | 115.13V     |
| 3      | 12.093A | 3.508A  | 3.472A  | 1.414A | 179.911       | 93.272%    | 1268            | 27.2              | 38.95°C        | 0.970       |
|        | 11.893V | 4.993V  | 3.335V  | 4.946V | 192.889       |            |                 |                   | 42.07°C        | 115.13V     |
| 4      | 16.706A | 4.015A  | 3.964A  | 1.621A | 239.806       | 93.075%    | 1488            | 32.4              | 39.49°C        | 0.975       |
|        | 11.888V | 4.985V  | 3.328V  | 4.934V | 257.647       |            |                 |                   | 42.98°C        | 115.12V     |
| 5      | 20.976A | 5.020A  | 4.971A  | 1.826A | 299.737       | 92.687%    | 1712            | 37.9              | 39.90°C        | 0.980       |
|        | 11.884V | 4.976V  | 3.318V  | 4.921V | 323.385       |            |                 |                   | 44.02°C        | 115.12V     |
| 6      | 25.251A | 6.039A  | 5.978A  | 2.036A | 359.739       | 91.782%    | 1979            | 40.4              | 40.21°C        | 0.984       |
|        | 11.879V | 4.968V  | 3.310V  | 4.908V | 391.951       |            |                 |                   | 45.23°C        | 115.12V     |
| 7      | 29.528A | 7.053A  | 6.996A  | 2.246A | 419.679       | 91.275%    | 2124            | 43.5              | 41.19°C        | 0.986       |
|        | 11.874V | 4.960V  | 3.300V  | 4.895V | 459.797       |            |                 |                   | 46.57°C        | 115.12V     |
| 8      | 33.808A | 8.080A  | 8.016A  | 2.456A | 479.699       | 90.753%    | 2156            | 44.1              | 42.41°C        | 0.988       |
|        | 11.870V | 4.951V  | 3.293V  | 4.885V | 528.576       |            |                 |                   | 48.35°C        | 115.12V     |
| 9      | 38.529A | 8.597A  | 8.551A  | 2.456A | 539.781       | 90.276%    | 2156            | 44.1              | 43.40°C        | 0.989       |
|        | 11.866V | 4.945V  | 3.285V  | 4.883V | 597.922       |            |                 |                   | 49.88°C        | 115.12V     |
| 10     | 43.200A | 9.112A  | 9.060A  | 2.561A | 599.624       | 89.744%    | 2156            | 44.1              | 44.81°C        | 0.990       |
|        | 11.862V | 4.939V  | 3.278V  | 4.874V | 668.150       |            |                 |                   | 53.14°C        | 115.13V     |
| 11     | 48.273A | 9.124A  | 9.073A  | 2.566A | 659.613       | 89.223%    | 2226            | 43.9              | 45.96°C        | 0.991       |
|        | 11.858V | 4.932V  | 3.273V  | 4.870V | 739.288       |            |                 |                   | 56.04°C        | 115.13V     |
| CL1    | 0.099A  | 12.012A | 12.006A | 0.004A | 100.865       | 86.502%    | 2156            | 44.1              | 42.81°C        | 0.950       |
|        | 11.901V | 4.980V  | 3.319V  | 5.049V | 116.604       |            |                 |                   | 49.95°C        | 115.13V     |

|     |         |        |        |        |         |         |      |      |         |         |
|-----|---------|--------|--------|--------|---------|---------|------|------|---------|---------|
| CL2 | 48.963A | 1.003A | 1.002A | 1.002A | 594.172 | 90.417% | 2226 | 43.9 | 43.76°C | 0.990   |
|     | 11.865V | 4.964V | 3.306V | 4.926V | 657.143 |         |      |      | 52.24°C | 115.14V |

The results above are not used in the certification process

## 230V

| Test # | 12V     | 5V      | 3.3V    | 5VSB   | DC/AC (Watts) | Efficiency | Fan Speed (RPM) | PSU Noise (dB[A]) | Temps (In/Out) | PF/AC Volts |
|--------|---------|---------|---------|--------|---------------|------------|-----------------|-------------------|----------------|-------------|
| 1      | 3.212A  | 1.994A  | 1.966A  | 1.006A | 59.791        | 87.179%    | 1547            | 33.6              | 39.28°C        | 0.704       |
|        | 11.894V | 5.011V  | 3.353V  | 4.973V | 68.584        |            |                 |                   | 42.63°C        | 230.79V     |
| 2      | 7.444A  | 2.996A  | 2.955A  | 1.209A | 119.466       | 92.050%    | 1595            | 33.7              | 40.03°C        | 0.840       |
|        | 11.901V | 5.004V  | 3.345V  | 4.961V | 129.784       |            |                 |                   | 43.68°C        | 230.76V     |
| 3      | 12.052A | 3.500A  | 3.444A  | 1.415A | 179.398       | 93.373%    | 1730            | 37.2              | 40.54°C        | 0.894       |
|        | 11.899V | 4.998V  | 3.338V  | 4.948V | 192.130       |            |                 |                   | 44.64°C        | 230.71V     |
| 4      | 16.663A | 4.007A  | 3.959A  | 1.621A | 239.424       | 93.659%    | 1950            | 39.1              | 40.82°C        | 0.920       |
|        | 11.897V | 4.991V  | 3.331V  | 4.934V | 255.635       |            |                 |                   | 45.54°C        | 230.67V     |
| 5      | 20.936A | 5.013A  | 4.963A  | 1.829A | 299.508       | 93.640%    | 2105            | 42.4              | 41.10°C        | 0.935       |
|        | 11.895V | 4.983V  | 3.323V  | 4.922V | 319.852       |            |                 |                   | 46.20°C        | 230.63V     |
| 6      | 25.208A | 6.028A  | 5.972A  | 2.036A | 359.618       | 93.431%    | 2166            | 43.7              | 41.82°C        | 0.945       |
|        | 11.894V | 4.976V  | 3.315V  | 4.912V | 384.902       |            |                 |                   | 47.24°C        | 230.59V     |
| 7      | 29.454A | 7.043A  | 6.982A  | 2.244A | 419.386       | 93.172%    | 2200            | 44.1              | 42.98°C        | 0.951       |
|        | 11.893V | 4.969V  | 3.307V  | 4.904V | 450.119       |            |                 |                   | 48.62°C        | 230.53V     |
| 8      | 33.762A | 8.062A  | 8.001A  | 2.454A | 479.858       | 92.879%    | 2226            | 43.9              | 43.45°C        | 0.956       |
|        | 11.891V | 4.961V  | 3.299V  | 4.891V | 516.649       |            |                 |                   | 49.55°C        | 230.49V     |
| 9      | 38.410A | 8.576A  | 8.504A  | 2.455A | 539.187       | 92.579%    | 2226            | 43.9              | 43.90°C        | 0.960       |
|        | 11.890V | 4.955V  | 3.292V  | 4.889V | 582.406       |            |                 |                   | 50.84°C        | 230.55V     |
| 10     | 43.124A | 9.096A  | 9.040A  | 2.562A | 599.907       | 92.228%    | 2226            | 43.9              | 44.76°C        | 0.963       |
|        | 11.889V | 4.948V  | 3.285V  | 4.880V | 650.462       |            |                 |                   | 51.95°C        | 230.51V     |
| 11     | 48.176A | 9.103A  | 9.056A  | 2.564A | 659.955       | 91.914%    | 2226            | 43.9              | 45.68°C        | 0.965       |
|        | 11.889V | 4.943V  | 3.279V  | 4.875V | 718.012       |            |                 |                   | 53.44°C        | 230.47V     |
| CL1    | 0.128A  | 11.999A | 11.998A | 0.000A | 101.302       | 86.425%    | 2145            | 43.4              | 40.83°C        | 0.825       |
|        | 11.891V | 4.988V  | 3.328V  | 5.053V | 117.214       |            |                 |                   | 46.85°C        | 230.85V     |

|     |         |        |        |        |         |         |      |      |         |         |
|-----|---------|--------|--------|--------|---------|---------|------|------|---------|---------|
| CL2 | 48.997A | 1.000A | 0.997A | 1.000A | 595.956 | 92.913% | 2226 | 43.9 | 44.40°C | 0.964   |
|     | 11.894V | 4.967V | 3.303V | 4.926V | 641.410 |         |      |      | 51.02°C | 230.51V |

The results above are not used in the certification process

### Light Load Tests

#### 115V

| Test # | 12V     | 5V     | 3.3V   | 5VSB   | DC/AC (Watts) | Efficiency | Fan Speed (RPM) | Fan Noise (dB[A]) | PF/AC Volts |
|--------|---------|--------|--------|--------|---------------|------------|-----------------|-------------------|-------------|
| 1      | 1.230A  | 0.491A | 0.473A | 0.196A | 19.669        | 75.124%    | 765             | 19.8              | 0.807       |
|        | 11.898V | 5.019V | 3.359V | 5.009V | 26.182        |            |                 |                   | 115.14V     |
| 2      | 2.478A  | 0.990A | 0.982A | 0.399A | 39.758        | 84.667%    | 765             | 19.8              | 0.891       |
|        | 11.906V | 5.015V | 3.356V | 4.999V | 46.958        |            |                 |                   | 115.14V     |
| 3      | 3.732A  | 1.487A | 1.489A | 0.601A | 59.871        | 90.639%    | 788             | 20.2              | 0.919       |
|        | 11.904V | 5.012V | 3.353V | 4.990V | 66.054        |            |                 |                   | 115.14V     |
| 4      | 4.974A  | 1.995A | 1.969A | 0.801A | 79.776        | 91.634%    | 924             | 22.3              | 0.935       |
|        | 11.902V | 5.009V | 3.349V | 4.980V | 87.059        |            |                 |                   | 115.13V     |

The results above are not used in the certification process

#### 230V

| Test # | 12V     | 5V     | 3.3V   | 5VSB   | DC/AC (Watts) | Efficiency | Fan Speed (RPM) | PSU Noise (dB[A]) | PF/AC Volts |
|--------|---------|--------|--------|--------|---------------|------------|-----------------|-------------------|-------------|
| 1      | 1.193A  | 0.496A | 0.472A | 0.200A | 19.268        | 78.909%    | 765             | 19.8              | 0.388       |
|        | 11.894V | 5.019V | 3.361V | 5.012V | 24.418        |            |                 |                   | 230.81V     |
| 2      | 2.471A  | 0.995A | 0.982A | 0.400A | 39.679        | 86.626%    | 765             | 19.8              | 0.586       |
|        | 11.894V | 5.016V | 3.358V | 5.001V | 45.805        |            |                 |                   | 230.80V     |
| 3      | 3.679A  | 1.493A | 1.458A | 0.601A | 59.135        | 88.081%    | 998             | 24.3              | 0.697       |
|        | 11.894V | 5.014V | 3.355V | 4.992V | 67.137        |            |                 |                   | 230.79V     |
| 4      | 4.958A  | 1.993A | 1.967A | 0.803A | 79.546        | 89.706%    | 1133            | 25.5              | 0.769       |
|        | 11.894V | 5.010V | 3.351V | 4.981V | 88.674        |            |                 |                   | 230.77V     |

The results above are not used in the certification process

## Ripple Measurements

### 115V

| Test        | 12V     | 5V      | 3.3V    | 5VSB    | Pass/Fail |
|-------------|---------|---------|---------|---------|-----------|
| 10% Load    | 19.4 mV | 7.5 mV  | 15.0 mV | 6.1 mV  | Pass      |
| 20% Load    | 20.0 mV | 7.7 mV  | 16.5 mV | 5.7 mV  | Pass      |
| 30% Load    | 25.7 mV | 8.6 mV  | 23.3 mV | 6.8 mV  | Pass      |
| 40% Load    | 31.5 mV | 9.1 mV  | 20.2 mV | 7.0 mV  | Pass      |
| 50% Load    | 37.3 mV | 10.2 mV | 22.1 mV | 8.8 mV  | Pass      |
| 60% Load    | 43.8 mV | 11.8 mV | 25.6 mV | 8.3 mV  | Pass      |
| 70% Load    | 51.0 mV | 21.5 mV | 42.0 mV | 17.7 mV | Pass      |
| 80% Load    | 55.4 mV | 21.6 mV | 45.7 mV | 17.3 mV | Pass      |
| 90% Load    | 60.0 mV | 15.5 mV | 38.1 mV | 11.2 mV | Pass      |
| 100% Load   | 66.2 mV | 18.8 mV | 36.7 mV | 15.8 mV | Pass      |
| 110% Load   | 72.1 mV | 20.6 mV | 37.1 mV | 15.3 mV | Pass      |
| Crossload 1 | 21.2 mV | 9.7 mV  | 18.1 mV | 7.0 mV  | Pass      |
| Crossload 2 | 64.8 mV | 18.8 mV | 33.7 mV | 13.3 mV | Pass      |

The results above are not used in the certification process

### 230V

| Test     | 12V     | 5V      | 3.3V    | 5VSB    | Pass/Fail |
|----------|---------|---------|---------|---------|-----------|
| 10% Load | 11.3 mV | 4.9 mV  | 14.9 mV | 4.1 mV  | Pass      |
| 20% Load | 23.5 mV | 6.2 mV  | 24.7 mV | 5.2 mV  | Pass      |
| 30% Load | 25.8 mV | 7.3 mV  | 19.4 mV | 5.1 mV  | Pass      |
| 40% Load | 29.8 mV | 7.7 mV  | 19.4 mV | 5.2 mV  | Pass      |
| 50% Load | 34.4 mV | 8.9 mV  | 21.2 mV | 6.0 mV  | Pass      |
| 60% Load | 38.4 mV | 10.8 mV | 22.7 mV | 5.7 mV  | Pass      |
| 70% Load | 43.4 mV | 21.2 mV | 39.1 mV | 15.7 mV | Pass      |
| 80% Load | 47.9 mV | 22.7 mV | 42.6 mV | 16.7 mV | Pass      |


| Test        | 12V     | 5V      | 3.3V    | 5VSB   | Pass/Fail |
|-------------|---------|---------|---------|--------|-----------|
| 90% Load    | 50.5 mV | 14.1 mV | 38.9 mV | 7.7 mV | Pass      |
| 100% Load   | 55.8 mV | 14.9 mV | 29.3 mV | 8.2 mV | Pass      |
| 110% Load   | 60.4 mV | 16.6 mV | 29.4 mV | 8.7 mV | Pass      |
| Crossload 1 | 33.3 mV | 9.1 mV  | 20.5 mV | 7.4 mV | Pass      |
| Crossload 2 | 55.5 mV | 12.6 mV | 25.2 mV | 7.8 mV | Pass      |

The results above are not used in the certification process

### SilverStone Strider Titanium 600W



Top side

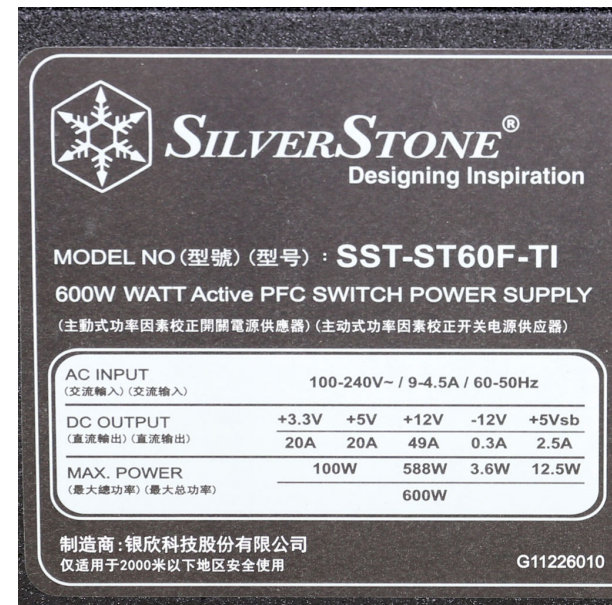

Power specifications label

Cybenetics [REDACTED]

ETA [REDACTED]

LAMBDA [REDACTED]

SAFE [REDACTED]

DELTA [REDACTED]

PHI [REDACTED]

CYBENETICS LTD Syrou 6, Latsia, 2231, Nicosia Cyprus

[www.cybenetics.com](http://www.cybenetics.com) - [info@cybenetics.com](mailto:info@cybenetics.com)