# Seasonic Focus Plus Gold 550W

Serial Number R1705AA135750743

Lab ID 133

Certification ID 25133

Test Result Report ID: 19PS133A

Certificate Issue Date: Jun 29, 2018

Scheme: ETA-EMI PSU

115V: CYBENETICS GOLD

230V: CYBENETICS SILVER 230v

Scheme: LAMBDA PSU

115V: CYBENETICS A

230V: CYBENETICS A+ 230v



Aristeidis Bitziopoulos, Certification Body General Manager

# General Information

## Test Equipment

| | |
|---|---|
| Electronic Loads | Chroma 63601-5 x2<br>Chroma 63600-2<br>Chroma 63640-80-80 x10<br>Chroma 63610-80-20 |
| AC Sources | Chroma 6530, APM SP300VAC4000W-P, GW Instek ASR-3500 |
| Power Analyzers | Rohde & Schwarz HMC8015 & NPA701 |
| Oscilloscopes | Picoscope 4444, Siglent SDS2104X PLUS |
| Sound Analyzer | Bruel & Kjaer 2270 G4 |
| Microphone | Bruel & Kjaer Type 4955-A |
| Temperature Logger | Picoscope TC-08 |
| Tachometer | UNI-T UT372 |
| Multimeters | Keysight 34465A |
| EMI Analyzer | TekBox TBMR-110M-EU |
| Isolation Transformer | 4kVA |
| UPS | FSP Champ Tower 3kVA, CyberPower OLS3000E 3kVA |
| Testing Methodology | Cybenetics PSU Test Protocol |

## DUT Information(Non-accredited measurements)

| | |
|---|---|
| Product Identification Details | |
| Brand | Seasonic |
| Model | Focus Plus Gold 550W |
| OEM/ODM | Seasonic |
| Serial Number | R1705AA135750743 |
| Product Specifications | |
| Manufacturer-Provided Information | |
| Rated Voltage (Vrms) | 100-240 |
| Rated Current (Arms) | 8-4 |
| Rated Frequency (Hz) | 50-60 |

| | |
|---|---|
| Rated Power (W) | 550 |
| Operating Temperature (Continuous Full Load) (°C) | |
| Type | ATX12V |
| Cable Design | Fully Modular |
| Warranty | - |
| Cybenetics Measurements | |
| Dimensions (W x H x D) | |
| Weight | |
| Cooling | 120mm Fluid Dynamic Bearing Fan<br>(HA1225H12F-Z) |
| Semi-Passive Operation | ✓ (selectable) |
| Cybenetics Testing Information | |
| Lab ID | 133 |
| Date of receipt | Jun 21, 2018 |
| Testing Date | Jun 25, 2018 |
| Report Issued Date | Jun 29, 2018 |
| Engineer Name | - |
| Authorized By the Laboratory Technical Manager | Aristeidis Bitziopoulos |
| Signature |  |

## Cables and Connectors(Non-accredited measurements)

| Modular Cables | | | |
|---|---|---|---|
| Description | Cable Count | Connector Count (Total) | Gauge |
| ATX connector 20+4 pin (610mm) | 1 | 1 | 18-22AWG |
| 4+4 pin EPS12V (655mm) | 1 | 1 | 18AWG |
| 6+2 pin PCIe (680mm+80mm) | 1 | 2 | 18AWG |
| SATA (460mm+115mm+115mm+115mm) | 1 | 4 | 18AWG |
| SATA (460mm+120mm) | 1 | 2 | 18AWG |
| 4 pin Molex (460mm+120mm+120mm) | 1 | 3 | 18AWG |
| FDD Adapter (+110mm) | 1 | 1 | 22AWG |

## Power Specifications

| Rail | | 3.3V | 5V | 12V | 5VSB | -12V |
|---|---|---|---|---|---|---|
| Max. Power | Amps | 20 | 20 | 45 | 3 | 0.3 |
| | Watts | 100 | | 540 | 15 | 3.6 |
| Total Max. Power (W) | | 550 | | | | |

## Parts Description

| General Data | |
|---|---|
| Manufacturer (OEM) | Seasonic |
| Platform Model | FX |
| Primary Side | |
| Transient Filter | 4x Y caps, 2x X caps, 2x CM chokes, 1x MOV |
| Inrush Protection | NTC Thermistor & Diode |
| Bridge Rectifier(s) | 2x GBU1506 (600V, 15A @ 100°C) |
| APFC MOSFETS | 2x UTC GPT18N50DG (500V, 18A @ 100°C, 0.265Ohm) |
| APFC Boost Diode | 1x STMicroelectronics STTH8S06D (600V, 8A @ 125°C) |
| Hold-up Cap(s) | 1x Nippon Chemi-Con (400V, 560uF, 2000h @ 105°C, CE) |
| Main Switchers | 4x UTC GBT10N50ADG<br>(500V, 10A @ 25°C, 0.61Ohm) |
| APFC Controller | Champion CM6500UNX |
| Resonant Controller | Champion CM6901T6X |
| Topology | Primary side: Full-Bridge & LLC Resonant Controller<br>Secondary side: Synchronous Rectification & DC-DC converters |
| Secondary Side | |
| +12V MOSFETS | 4x Nexperia PSMN2R6-40YS (40V, 100A @ 25°C, 2.8mOhm) |
| 5V & 3.3V | DC-DC Converters: 6x Infineon BSC0906NS (30V, 40A @ 100°C, 4.5mOhm)<br>PWM Controller: APW7159 |
| Filtering Capacitors | Electrolytics: Chemi-Con (1-5,000 @ 105°C, KZE), Chemi-Con (4-10,000 @ 105°C, KY), W<br>Polymers: Chemi-Con |
| Supervisor IC | Weltrend WT7527V (OVP, UVP, OCP, SCP, PG) |
| Fan Model | Hong Hua HA1225H12F-Z (120mm, 12V, 0.58A, 2200 RPM, Fluid Dynamic Bearing) |
| 5VSB Circuit | |

| | |
|---|---|
| Standby PWM Controller | Excelliance EM8569 |

# Test Results

## Temperature & Compliance Info

| | |
|---|---|
| Temperature Range (°C /°F) | 28-32 / 82.4-89.6 |
| ErP Lot 3/6 Ready | ✓ |
| (EU) No 617/2013 Compliance | ✓ |

## Performance Summary

### 115V

| | |
|---|---|
| Accredited | |
| Average Efficiency (>1450 load combinations) | 88.048% |
| Average Noise Output (>1450 Load Combinations) | 23.19dBA |
| Average PF (>1450 Load Combinations) | 0.984 |
| Efficiency With 10W (≤500W) or 2% (>500W) Load | - |
| Standby Power Consumption | 0.0456W |
| Non-Accredited | |
| 12V Ripple (Full Load) | 24.83mV |
| 5V Ripple (Full Load) | 12.48mV |
| 3.3V Ripple (Full Load) | 12.30mV |
| 5VSB Ripple (Full Load) | 9.31mV |
| 12V Load Regulation | 0.07% |
| 5V Load Regulation | 0.46% |
| 3.3V Load Regulation | 0.12% |
| 5VSB Load Regulation | 3.04% |
| Inrush Current | 41.972A |

| 230V | | |
|---|---|---|
| Accredited | | |
| Average Efficiency (>1450 load combinations) | 90.768% | |
| Average Noise Output (>1450 Load Combinations) | 18.68dBA | |
| Average PF (>1450 Load Combinations) | 0.926 | |
| Efficiency With 10W (≤500W) or 2% (>500W) Load | - | |
| Standby Power Consumption | 0.0756W | |
| Non-Accredited | | |
| 12V Ripple (Full Load) | 22.87mV | |
| 5V Ripple (Full Load) | 13.50mV | |
| 3.3V Ripple (Full Load) | 13.51mV | |
| 5VSB Ripple (Full Load) | 7.95mV | |
| 12V Load Regulation | 0.11% | |
| 5V Load Regulation | 0.32% | |
| 3.3V Load Regulation | 0.54% | |
| 5VSB Load Regulation | 2.67% | |
| Inrush Current | 54.244A | |
| Hold-Up Time & PWR_OK Signal | 23.70ms | |
| AC Loss to PWR_OK Hold Up Time | 19.50ms | |
| PWR_OK Inactive to DC Loss Delay | 4.20ms | |
| OPP (0.00°C / 0.00°C) | - | - |


## Hold-Up Time & PWR_OK Signal

| | |
|---|---|
| Hold-Up Time (ms) | 23.7 |
| AC Loss to PWR_OK Hold Up Time (ms) | 19.5 |
| PWR_OK Inactive to DC Loss Delay (ms) | 4.2 |


# Vampire Power

## Graphs

### 115V

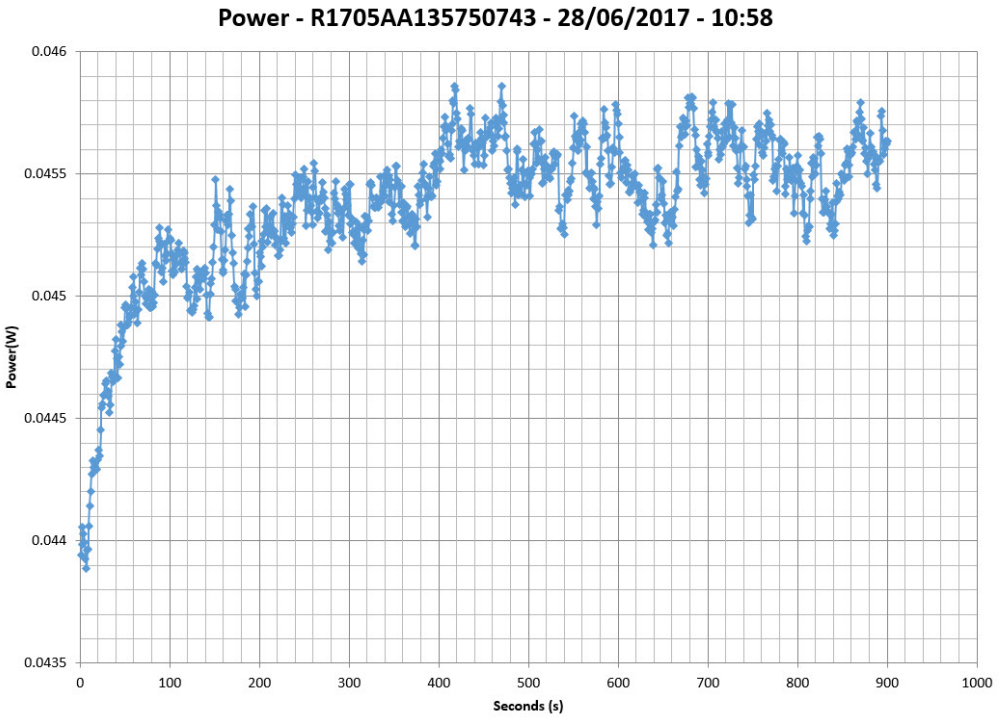



### 230V

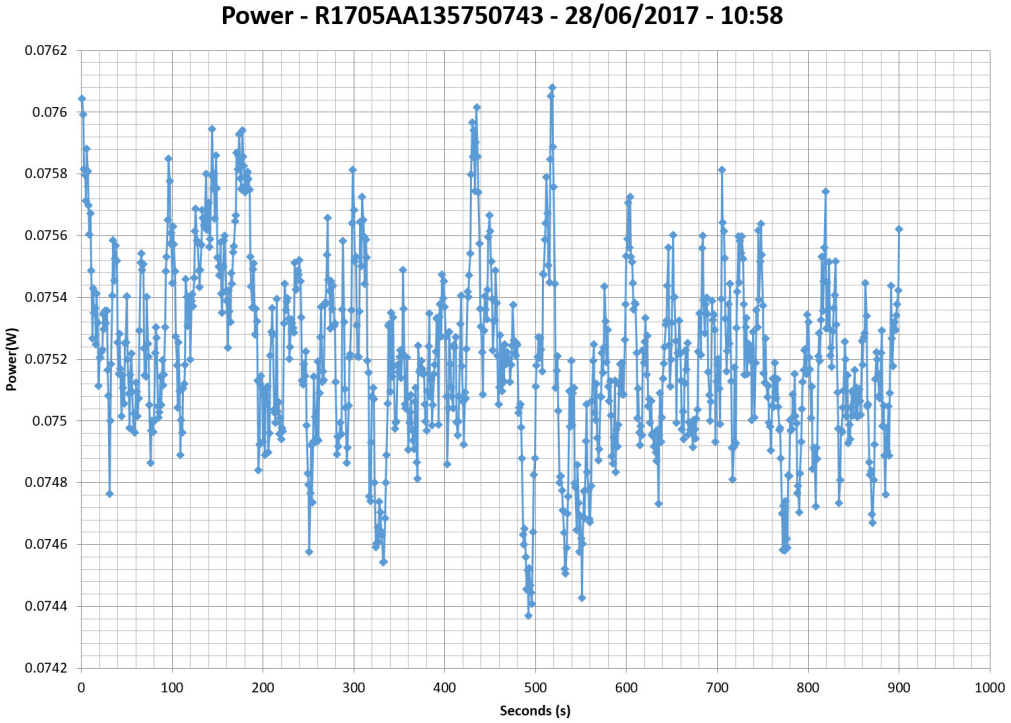

## Efficiency Graph


### 115V

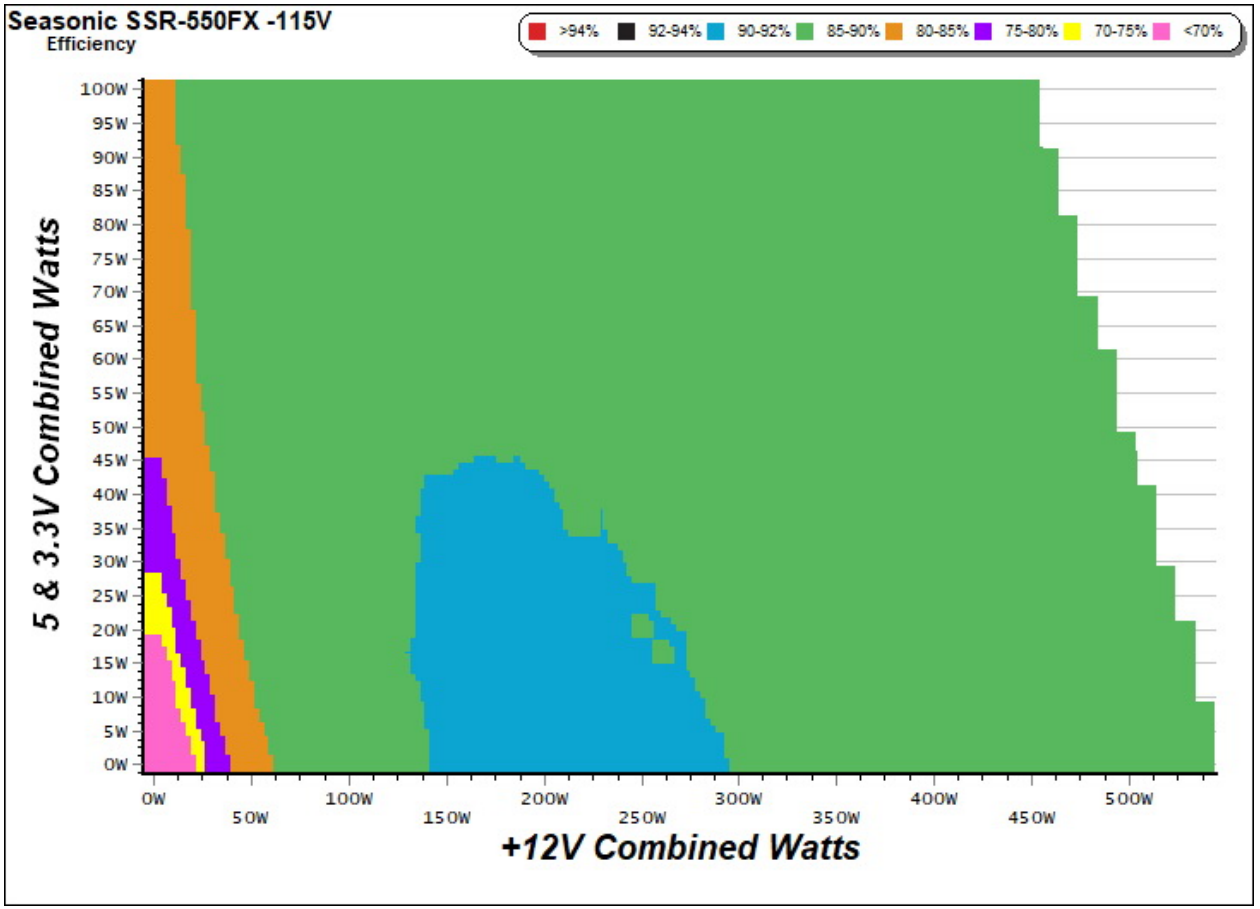


### INFO

This graph depicts the PSU`s efficiency throughout its entire operational range. For the generation of the efficiency and noise graphs we set our loaders to auto mode through our custom-made software before trying thousands of possible load combinations.

## 230V

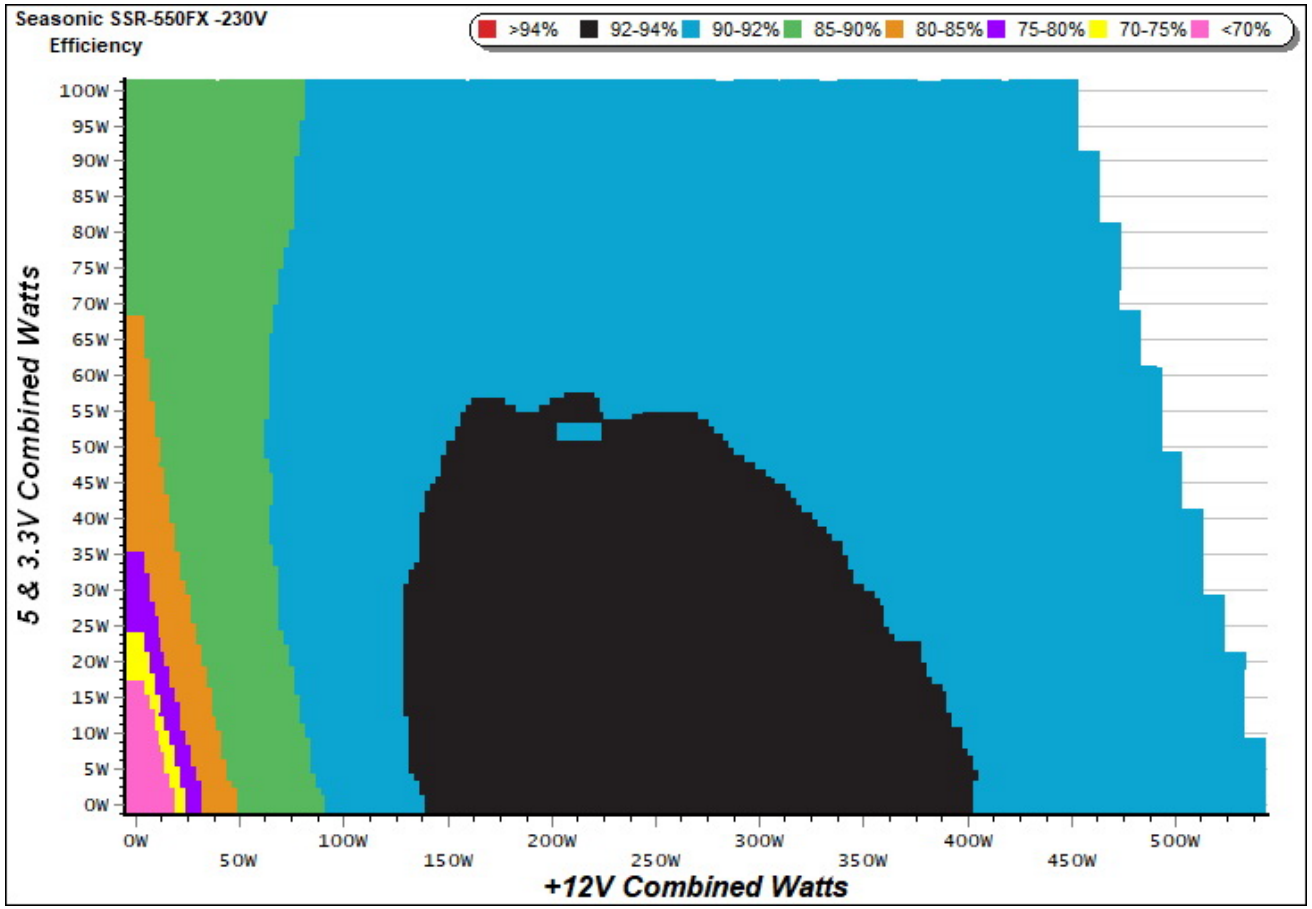



### INFO

This graph depicts the PSU`s efficiency throughout its entire operational range. For the generation of the efficiency and noise graphs we set our loaders to auto mode through our custom-made software before trying thousands of possible load combinations.

## Noise Graph


### 115V

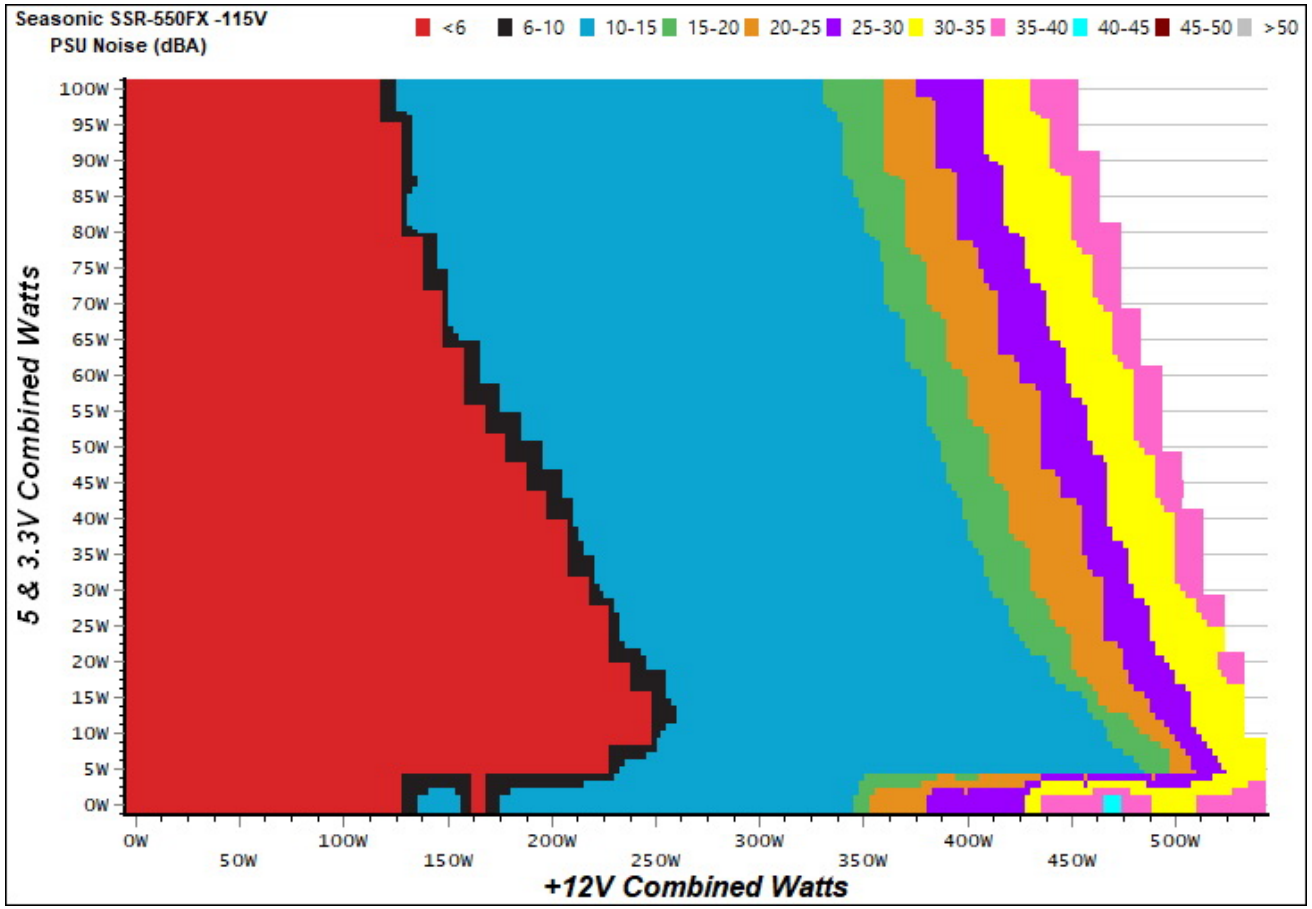


### INFO

The PSU`s noise in its entire operational range and under 30-32 °C ambient is depicted in this graph. The X axis represents the load on the +12V rail(s) while the Y axis is the load on the minor rails.

## 230V

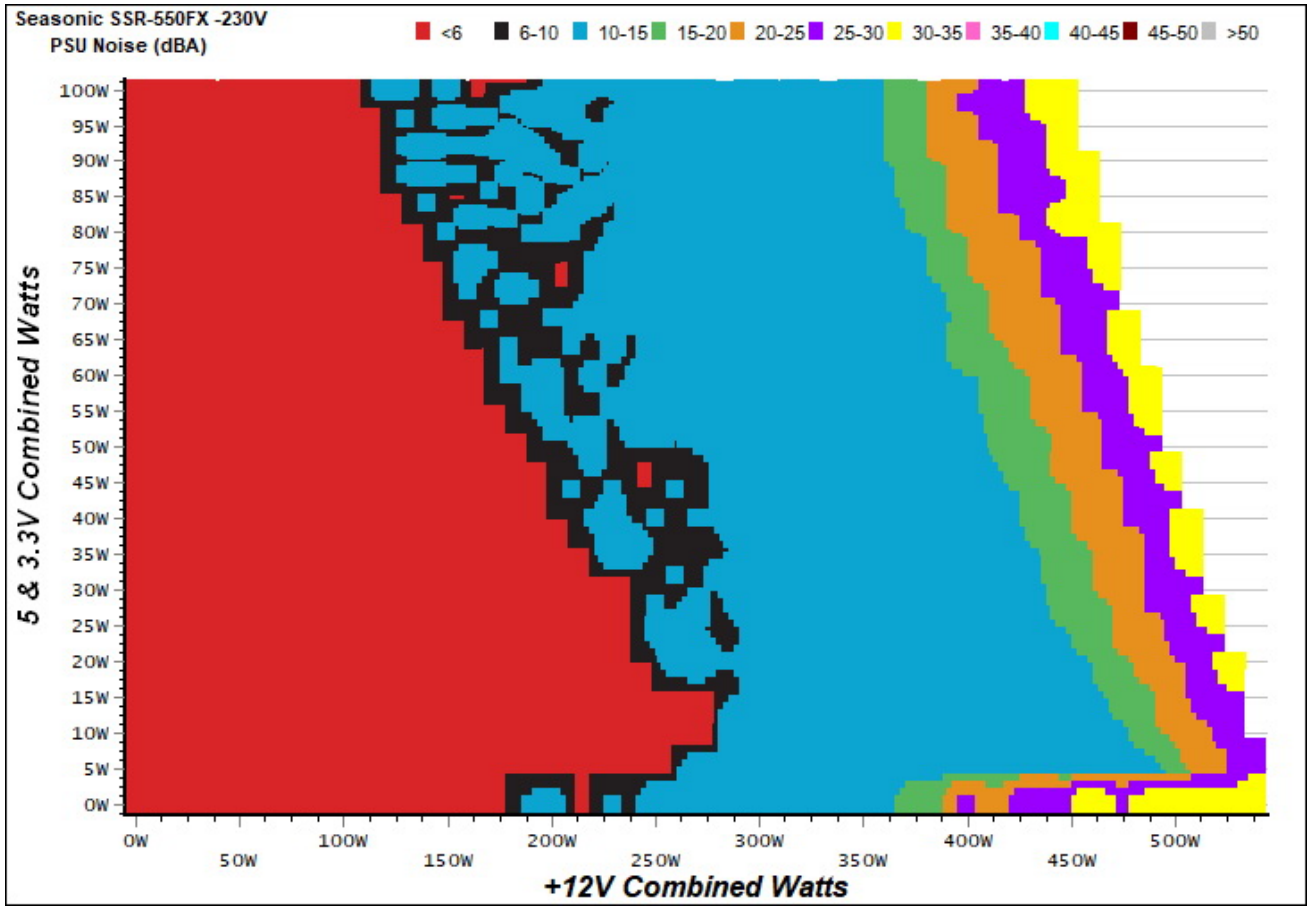



### INFO

The PSU`s noise in its entire operational range and under 30-32 °C ambient is depicted in this graph. The X axis represents the load on the +12V rail(s) while the Y axis is the load on the minor rails.

## Indicative Performance


### Efficiency under high ambient temperature

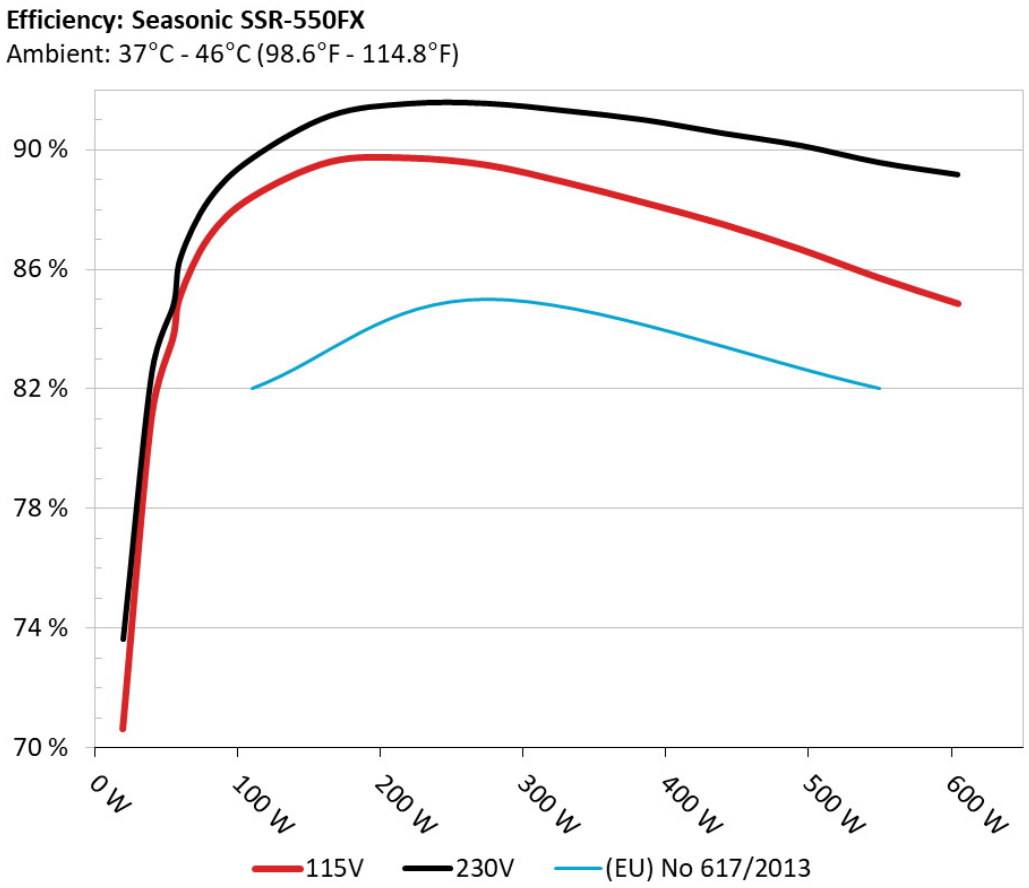


**INFO**

The PSU`s efficiency under high ambient temperatures with 115V and 230V input. For this graph the results of the 10-110% load regulation table are used.

## 5VSB Efficiency

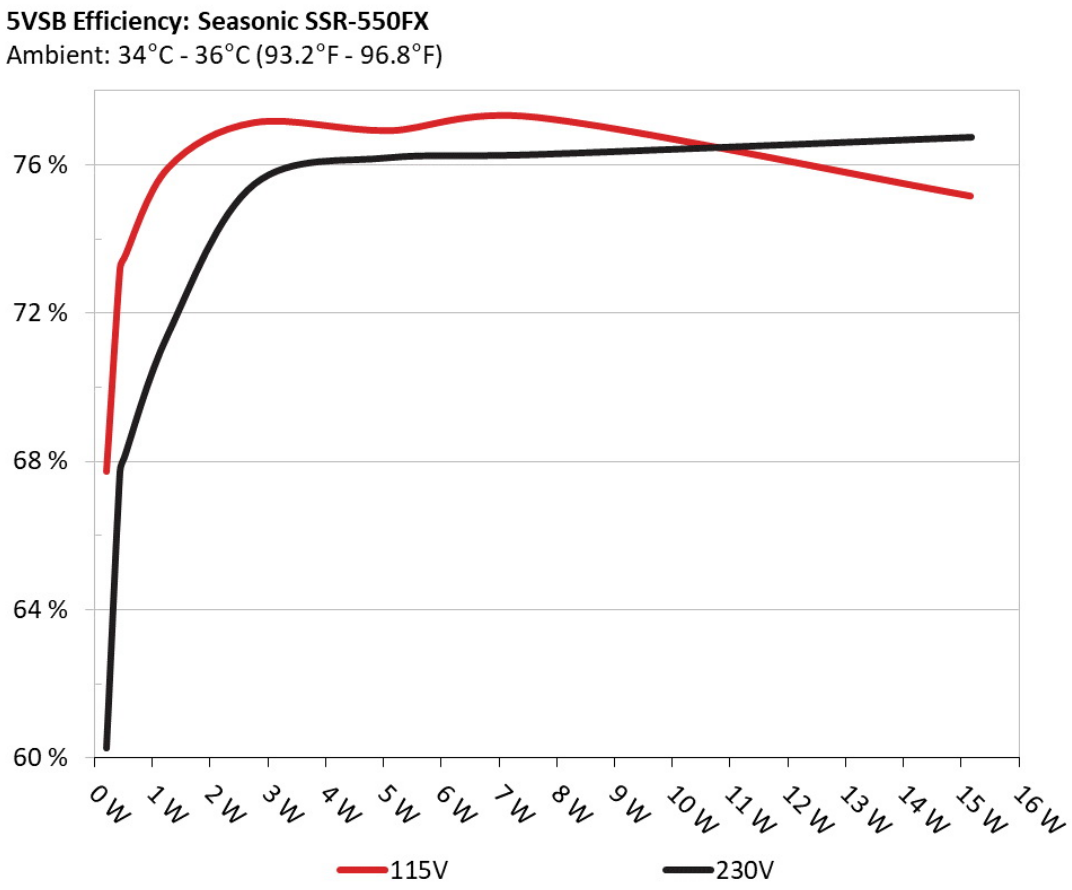


### INFO

This graph depicts the efficiency levels of the 5VSB rail with 115V and 230V input.

## 5VSB Efficiency (ERP LOT 3/6 & CEC)

### 115V

| Test # | 5VSB | DC/AC (Watts) | Efficiency | PF/AC Volts |
|---|---|---|---|---|
| 1 | 0.042A | 0.214 | 67.722% | 0.053 |
| | 5.133V | 0.316 | | 115.15V |
| 2 | 0.087A | 0.448 | 73.203% | 0.099 |
| | 5.132V | 0.612 | | 115.16V |
| 3 | 0.542A | 2.776 | 77.133% | 0.332 |
| | 5.120V | 3.599 | | 115.16V |
| 4 | 1.002A | 5.121 | 76.915% | 0.401 |
| | 5.109V | 6.658 | | 115.16V |
| 5 | 1.502A | 7.655 | 77.276% | 0.436 |
| | 5.098V | 9.906 | | 115.16V |
| 6 | 3.002A | 15.168 | 75.152% | 0.483 |
| | 5.053V | 20.183 | | 115.16V |

### 230V

| Test # | 5VSB | DC/AC (Watts) | Efficiency | PF/AC Volts |
|---|---|---|---|---|
| 1 | 0.042A | 0.214 | 60.282% | 0.018 |
| | 5.133V | 0.355 | | 230.40V |
| 2 | 0.087A | 0.447 | 67.727% | 0.033 |
| | 5.131V | 0.660 | | 230.40V |
| 3 | 0.542A | 2.776 | 75.476% | 0.162 |
| | 5.120V | 3.678 | | 230.39V |
| 4 | 1.002A | 5.119 | 76.187% | 0.245 |
| | 5.109V | 6.719 | | 230.40V |
| 5 | 1.502A | 7.653 | 76.271% | 0.299 |
| | 5.096V | 10.034 | | 230.40V |
| 6 | 3.002A | 15.186 | 76.736% | 0.371 |
| | 5.059V | 19.790 | | 230.40V |

## Supplementary Tests (For Reference)

### Typical Load Tests

#### 115V

| Test # | 12V | 5V | 3.3V | 5VSB | DC/AC (Watts) | Efficiency | Fan Speed (RPM) | Fan Noise (dB[A]) | Temps (In/Out) | PF/AC Volts |
|---|---|---|---|---|---|---|---|---|---|---|
| 1 | 2.730A | 1.994A | 1.984A | 0.980A | 54.808 | 83.708% | 0 | \| 6.0 | 45.00°C | 0.939 |
| | 12.165V | 5.024V | 3.318V | 5.098V | 65.475 | | | | 38.78°C | 115.19V |
| 2 | 6.486A | 2.982A | 2.978A | 1.178A | 109.739 | 88.402% | 0 | \| 6.0 | 46.60°C | 0.975 |
| | 12.164V | 5.021V | 3.318V | 5.085V | 124.136 | | | | 39.53°C | 115.20V |
| 3 | 10.588A | 3.488A | 3.492A | 1.379A | 164.875 | 89.589% | 0 | \| 6.0 | 47.93°C | 0.984 |
| | 12.164V | 5.019V | 3.317V | 5.071V | 184.034 | | | | 40.10°C | 115.18V |
| 4 | 14.685A | 3.986A | 3.975A | 1.580A | 219.771 | 89.716% | 700 | 14.6 | 41.30°C | 0.988 |
| | 12.162V | 5.017V | 3.316V | 5.059V | 244.963 | | | | 50.56°C | 115.18V |
| 5 | 18.438A | 4.981A | 4.973A | 1.780A | 274.687 | 89.479% | 550 | 10.4 | 41.47°C | 0.990 |
| | 12.162V | 5.014V | 3.316V | 5.044V | 306.985 | | | | 50.75°C | 115.18V |
| 6 | 22.196A | 5.987A | 5.967A | 1.986A | 329.709 | 88.901% | 560 | 10.5 | 41.98°C | 0.990 |
| | 12.161V | 5.012V | 3.316V | 5.030V | 370.872 | | | | 52.26°C | 115.18V |
| 7 | 25.952A | 6.990A | 6.964A | 2.190A | 384.664 | 88.226% | 880 | 20.6 | 43.32°C | 0.990 |
| | 12.160V | 5.009V | 3.316V | 5.015V | 435.998 | | | | 53.00°C | 115.17V |
| 8 | 29.705A | 7.991A | 7.961A | 2.399A | 439.578 | 87.505% | 1325 | 31.4 | 43.51°C | 0.991 |
| | 12.159V | 5.007V | 3.315V | 4.999V | 502.349 | | | | 52.32°C | 115.17V |
| 9 | 33.891A | 8.489A | 8.474A | 2.400A | 494.604 | 86.656% | 1880 | 40.2 | 44.10°C | 0.992 |
| | 12.158V | 5.005V | 3.315V | 4.991V | 570.765 | | | | 51.76°C | 115.17V |
| 10 | 37.824A | 9.004A | 8.961A | 3.015A | 549.515 | 85.704% | 2310 | 45.1 | 44.97°C | 0.992 |
| | 12.156V | 5.003V | 3.314V | 4.969V | 641.178 | | | | 52.00°C | 115.16V |
| 11 | 42.344A | 9.006A | 8.962A | 3.020A | 604.455 | 84.852% | 2320 | 45.2 | 46.06°C | 0.992 |
| | 12.156V | 5.002V | 3.313V | 4.961V | 712.362 | | | | 53.42°C | 115.16V |
| CL1 | 0.098A | 12.012A | 12.003A | 0.004A | 101.375 | 85.128% | 720 | 14.9 | 45.85°C | 0.973 |
| | 12.165V | 5.011V | 3.330V | 5.096V | 119.086 | | | | 48.74°C | 115.20V |

| | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|
| CL2 | 44.966A | 1.004A | 1.003A | 1.002A | 559.997 | 86.334% | 2320 | 45.2 | 45.17°C | 0.992 |
| | 12.156V | 5.009V | 3.306V | 5.036V | 648.643 | | | | 52.51°C | 115.18V |

The results above are not used in the certification process

**230V**

| Test # | 12V | 5V | 3.3V | 5VSB | DC/AC (Watts) | Efficiency | Fan Speed (RPM) | PSU Noise (dB[A]) | Temps (In/Out) | PF/AC Volts |
|---|---|---|---|---|---|---|---|---|---|---|
| 1 | 2.730A | 1.995A | 1.989A | 0.981A | 54.838 | 84.975% | 0 | <6.0 | 53.92°C | 0.702 |
| | 12.171V | 5.022V | 3.314V | 5.099V | 64.534 | | | | 39.59°C | 230.24V |
| 2 | 6.486A | 2.980A | 2.986A | 1.176A | 109.762 | 89.871% | 0 | <6.0 | 54.56°C | 0.854 |
| | 12.169V | 5.020V | 3.312V | 5.089V | 122.133 | | | | 39.57°C | 230.24V |
| 3 | 10.586A | 3.488A | 3.502A | 1.376A | 164.894 | 91.180% | 0 | <6.0 | 41.34°C | 0.912 |
| | 12.168V | 5.019V | 3.310V | 5.076V | 180.844 | | | | 52.37°C | 230.25V |
| 4 | 14.681A | 3.986A | 3.988A | 1.576A | 219.800 | 91.689% | 440 | 10.5 | 40.86°C | 0.936 |
| | 12.167V | 5.018V | 3.308V | 5.065V | 239.723 | | | | 56.92°C | 230.25V |
| 5 | 18.435A | 4.979A | 4.989A | 1.781A | 274.760 | 91.708% | 560 | 10.5 | 40.88°C | 0.952 |
| | 12.166V | 5.017V | 3.307V | 5.054V | 299.602 | | | | 57.13°C | 230.25V |
| 6 | 22.196A | 5.985A | 5.989A | 1.981A | 329.777 | 91.487% | 560 | 10.5 | 41.13°C | 0.961 |
| | 12.164V | 5.014V | 3.304V | 5.042V | 360.464 | | | | 57.83°C | 230.25V |
| 7 | 25.950A | 6.991A | 6.991A | 2.186A | 384.722 | 91.166% | 755 | 16.1 | 41.15°C | 0.967 |
| | 12.162V | 5.012V | 3.302V | 5.030V | 422.001 | | | | 58.42°C | 230.25V |
| 8 | 29.705A | 7.987A | 8.000A | 2.391A | 439.623 | 90.763% | 1120 | 27.7 | 41.81°C | 0.972 |
| | 12.160V | 5.010V | 3.300V | 5.017V | 484.362 | | | | 57.31°C | 230.25V |
| 9 | 33.892A | 8.484A | 8.516A | 2.394A | 494.677 | 90.421% | 1695 | 37.7 | 41.31°C | 0.975 |
| | 12.159V | 5.009V | 3.299V | 5.010V | 547.081 | | | | 55.64°C | 230.26V |
| 10 | 37.834A | 8.993A | 9.009A | 3.006A | 549.701 | 89.924% | 1935 | 42.1 | 42.16°C | 0.978 |
| | 12.158V | 5.007V | 3.296V | 4.988V | 611.298 | | | | 54.03°C | 230.24V |
| 11 | 42.349A | 8.992A | 9.010A | 3.008A | 604.519 | 89.461% | 2320 | 45.2 | 42.54°C | 0.980 |
| | 12.157V | 5.005V | 3.295V | 4.983V | 675.738 | | | | 54.53°C | 230.24V |
| CL1 | 0.101A | 12.013A | 12.004A | 0.005A | 101.222 | 86.540% | 0 | <6.0 | 46.19°C | 0.846 |
| | 12.170V | 5.015V | 3.309V | 5.109V | 116.965 | | | | 41.29°C | 230.26V |

| | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|
| CL2 | 44.982A | 1.003A | 1.001A | 1.002A | 560.286 | 90.576% | 1990 | 42.8 | 39.66°C | 0.978 |
| | 12.158V | 5.011V | 3.302V | 5.053V | 618.578 | | | | 52.32°C | 230.24V |

The results above are not used in the certification process

## Light Load Tests

### 115V

| Test # | 12V | 5V | 3.3V | 5VSB | DC/AC (Watts) | Efficiency | Fan Speed (RPM) | Fan Noise (dB[A]) | PF/AC Volts |
|---|---|---|---|---|---|---|---|---|---|
| 1 | 1.199A | 0.493A | 0.480A | 0.195A | 19.663 | 70.646% | 0 | \| 6.0 | 0.776 |
| | 12.166V | 5.033V | 3.321V | 5.125V | 27.833 | | | | 115.19V |
| 2 | 2.422A | 0.992A | 0.992A | 0.391A | 39.740 | 81.049% | 0 | \| 6.0 | 0.907 |
| | 12.165V | 5.026V | 3.317V | 5.117V | 49.032 | | | | 115.19V |
| 3 | 3.652A | 1.488A | 1.504A | 0.585A | 59.883 | 85.108% | 0 | \| 6.0 | 0.948 |
| | 12.165V | 5.025V | 3.318V | 5.109V | 70.361 | | | | 115.19V |
| 4 | 4.864A | 1.994A | 1.988A | 0.781A | 79.767 | 87.060% | 0 | \| 6.0 | 0.963 |
| | 12.165V | 5.024V | 3.318V | 5.099V | 91.623 | | | | 115.19V |

The results above are not used in the certification process

### 230V

| Test # | 12V | 5V | 3.3V | 5VSB | DC/AC (Watts) | Efficiency | Fan Speed (RPM) | PSU Noise (dB[A]) | PF/AC Volts |
|---|---|---|---|---|---|---|---|---|---|
| 1 | 1.203A | 0.490A | 0.480A | 0.196A | 19.705 | 73.799% | 0 | <6.0 | 0.486 |
| | 12.172V | 5.030V | 3.318V | 5.126V | 26.701 | | | | 230.22V |
| 2 | 2.424A | 0.990A | 0.994A | 0.391A | 39.773 | 82.721% | 0 | <6.0 | 0.607 |
| | 12.172V | 5.023V | 3.314V | 5.118V | 48.081 | | | | 230.24V |
| 3 | 3.652A | 1.487A | 1.506A | 0.586A | 59.904 | 86.535% | 0 | <6.0 | 0.721 |
| | 12.171V | 5.023V | 3.314V | 5.111V | 69.225 | | | | 230.23V |
| 4 | 4.866A | 1.994A | 1.989A | 0.781A | 79.812 | 88.480% | 0 | <6.0 | 0.789 |
| | 12.171V | 5.022V | 3.313V | 5.102V | 90.203 | | | | 230.24V |

The results above are not used in the certification process

## Ripple Measurements

### 115V

| Test | 12V | 5V | 3.3V | 5VSB | Pass/Fail |
|---|---|---|---|---|---|
| 10% Load | 8.7 mV | 5.5 mV | 6.9 mV | 5.8 mV | Pass |
| 20% Load | 11.9 mV | 6.8 mV | 9.3 mV | 6.3 mV | Pass |
| 30% Load | 13.8 mV | 7.4 mV | 9.6 mV | 5.9 mV | Pass |
| 40% Load | 15.8 mV | 7.3 mV | 11.3 mV | 5.6 mV | Pass |
| 50% Load | 17.2 mV | 8.0 mV | 9.7 mV | 7.0 mV | Pass |
| 60% Load | 19.1 mV | 9.5 mV | 8.2 mV | 6.0 mV | Pass |
| 70% Load | 20.5 mV | 9.5 mV | 8.2 mV | 6.6 mV | Pass |
| 80% Load | 21.8 mV | 10.9 mV | 9.2 mV | 7.7 mV | Pass |
| 90% Load | 23.6 mV | 11.9 mV | 9.7 mV | 8.3 mV | Pass |
| 100% Load | 24.8 mV | 12.5 mV | 12.3 mV | 9.3 mV | Pass |
| 110% Load | 26.3 mV | 14.6 mV | 12.4 mV | 9.3 mV | Pass |
| Crossload 1 | 13.2 mV | 10.9 mV | 9.8 mV | 8.0 mV | Pass |
| Crossload 2 | 24.4 mV | 10.4 mV | 11.6 mV | 8.6 mV | Pass |

The results above are not used in the certification process

### 230V

| Test | 12V | 5V | 3.3V | 5VSB | Pass/Fail |
|---|---|---|---|---|---|
| 10% Load | 7.4 mV | 5.1 mV | 7.4 mV | 5.4 mV | Pass |
| 20% Load | 10.8 mV | 5.7 mV | 8.0 mV | 5.3 mV | Pass |
| 30% Load | 13.4 mV | 5.9 mV | 7.8 mV | 5.6 mV | Pass |
| 40% Load | 14.9 mV | 6.5 mV | 8.9 mV | 5.7 mV | Pass |
| 50% Load | 16.0 mV | 7.2 mV | 8.8 mV | 6.0 mV | Pass |
| 60% Load | 17.4 mV | 8.1 mV | 8.6 mV | 6.0 mV | Pass |
| 70% Load | 18.8 mV | 9.4 mV | 8.6 mV | 6.1 mV | Pass |
| 80% Load | 19.8 mV | 9.3 mV | 9.3 mV | 6.3 mV | Pass |


| Test | 12V | 5V | 3.3V | 5VSB | Pass/Fail |
|---|---|---|---|---|---|
| 90% Load | 20.8 mV | 10.6 mV | 10.2 mV | 6.8 mV | Pass |
| 100% Load | 22.9 mV | 13.5 mV | 13.5 mV | 8.0 mV | Pass |
| 110% Load | 23.9 mV | 14.6 mV | 14.7 mV | 7.9 mV | Pass |
| Crossload 1 | 11.1 mV | 10.0 mV | 9.9 mV | 7.2 mV | Pass |
| Crossload 2 | 22.8 mV | 9.3 mV | 13.4 mV | 7.2 mV | Pass |

The results above are not used in the certification process

## Seasonic Focus Plus Gold 550W



Top side

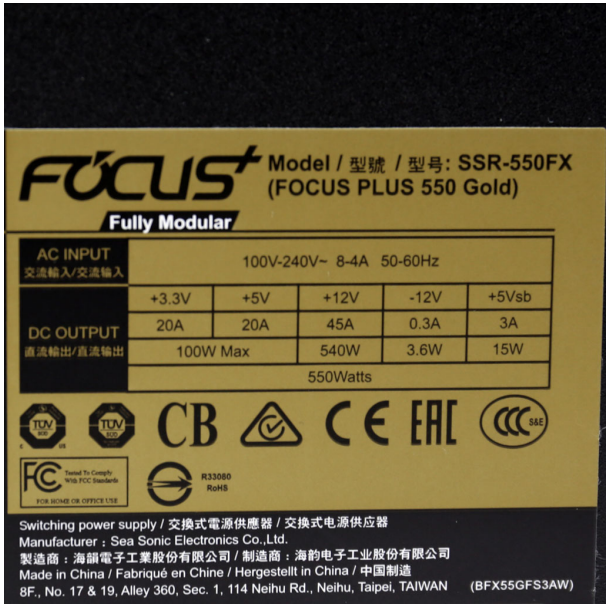


Power specifications label

All data and graphs included in this test report can be used by any individual on the following conditions:
› It should be mentioned that the test results are provided by Cybenetics
› The link to the original test results document should be provided in any case

Cybenetics runs voluntary certification programs for power supplies - ETA for efficiency, LAMBDA for noise and SAFE for safety and correct operation - and for cooling products, with DELTA for chassis soundproofing and PHI for fan airflow and static pressure. THETA rates cooler performance on AMD AM5 and Intel LGA1851 outside ISO 17065 and accreditation scope

CYBENETICS LTD Syrou 6, Latsia, 2231, Nicosia Cyprus

www.cybenetics.com - info@cybenetics.com