



be quiet! Pure Power 11 FM 850W


Serial Number 324H1480009915

Lab ID BQ85001988

Certification ID 251988

Test Result Report ID: 22PS1988A

Certificate Issue Date: Mar 9, 2022

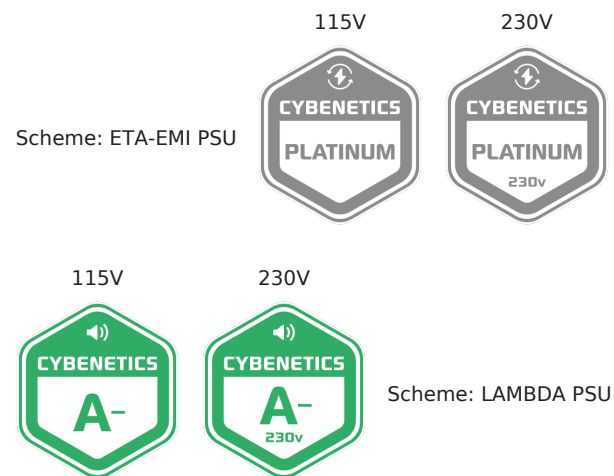

A handwritten signature in blue ink, appearing to read 'A. Bitziopoulos', is positioned above the name of the Certification Body General Manager.

Aristeidis Bitziopoulos, Certification Body General Manager

General Information

Test Equipment

Electronic Loads	Chroma 63601-5 x2 Chroma 63600-2 Chroma 63640-80-80 x10 Chroma 63610-80-20
AC Sources	Chroma 6530, APM SP300VAC4000W-P, GW Instek ASR-3500
Power Analyzers	Rohde & Schwarz HMC8015 & NPA701
Oscilloscopes	Picoscope 4444, Siglent SDS2104X PLUS
Sound Analyzer	Bruel & Kjaer 2270 G4
Microphone	Bruel & Kjaer Type 4955-A
Temperature Logger	Picoscope TC-08
Tachometer	UNI-T UT372
Multimeters	Keysight 34465A
EMI Analyzer	TekBox TBMR-110M-EU
Isolation Transformer	4kVA
UPS	FSP Champ Tower 3kVA, CyberPower OLS3000E 3kVA
Testing Methodology	Cybenetics PSU Test Protocol

DUT Information(Non-accredited measurements)

Product Identification Details	
Brand	be quiet!
Model	Pure Power 11 FM 850W
OEM/ODM	HEC
Serial Number	324H1480009915
Product Specifications	
Manufacturer-Provided Information	
Rated Voltage (Vrms)	100-240
Rated Current (Arms)	50-60
Rated Frequency (Hz)	12-6

Rated Power (W)	850
Operating Temperature (Continuous Full Load) (°C)	
Type	ATX12V
Cable Design	Fully Modular
Warranty	-
Cybenetics Measurements	
Dimensions (W x H x D)	
Weight	
Cooling	120mm Rifle Bearing Fan (BQ QF2-12025-HS)
Semi-Passive Operation	X
Cybenetics Testing Information	
Lab ID	BQ85001988
Date of receipt	Feb 10, 2022
Testing Date	Mar 8, 2022
Report Issued Date	Mar 9, 2022
Engineer Name	-
Authorized By the Laboratory Technical Manager	Aristeidis Bitziopoulos
Signature	

Cables and Connectors(Non-accredited measurements)

Modular Cables				
Description	Cable Count	Connector Count (Total)	Gauge	In Cable Capacitors
ATX connector 20+4 pin (550mm)	1	1	16-22AWG	No
4+4 pin EPS12V (600mm)	1	1	18AWG	No
8 pin EPS12V (600mm)	1	1	18AWG	No
6+2 pin PCIe (500mm+150mm)	2	4	16-18AWG	No
SATA (500mm+150mm+150mm+150mm)	2	8	18AWG	No
SATA (500mm+150mm) / 4-pin Molex (+150mm+150mm) / FDD (+150mm)	1	2 / 2 / 1	18-20AWG	No
AC Power Cord (1360mm) - C13 coupler	1	1	18AWG	-

Power Specifications

Rail		3.3V	5V	12V(1)	12V(2)	5VSB	-12V
Max. Power	Amps	22	22	40	36	3	0.3
	Watts	120		849.6		15	3.6
Total Max. Power (W)		850					

Parts Description

General Data	-
Manufacturer (OEM)	HEC
PCB Type	Double Sided
Primary Side	-
Transient Filter	4x Y caps, 3x X caps, 2x CM chokes, 1x MOV, 1x Power Integrations CAP200G (Discharge IC)
Inrush Protection	NTC Thermistor SCK-056 (5 Ohm) & Relay
Bridge Rectifier(s)	2x MCC GBU15KL (800V, 15A @ 100°C)
APFC MOSFETs	3x Infineon IPA60R180P7S (600V, 11A @ 100°C, Rds(on): 0.18Ohm)
APFC Boost Diode	1x CREE C6D08065A (650V, 8A @ 155°C)
Bulk Cap(s)	2x Teapo (400V, 390uF each or 780uF, 2,000h @ 105°C, LG)
Main Switchers	2x Infineon IPA60R120P7 (600V, 16A @ 100°C, Rds(on): 0.12Ohm)
APFC Controller	Champion CM6500UNX & CM03AX
Resonant Controller	Champion CM6901T6X
Topology	Primary side: APFC, Half-Bridge & LLC converter Secondary side: Synchronous Rectification & DC-DC converters
Secondary Side	-
+12V MOSFETs	6x Nexperia PSMN1R9-40YSD (40V, 162A @ 100°C, Rds(on): 1.9mOhm)
5V & 3.3V	DC-DC Converters
Filtering Capacitors	Electrolytic: 13x Teapo (1-3,000h @ 105°C, SC), 1x Elite (105°C, EM) Polymer: 12x Teapo, 16x no info
Supervisor IC	Weltrend WT7527RT (OCP, OVP, UVP, SCP, PG)
Fan Model	be quiet! BQ QF2-12025-HS (120mm, 12V, 0.30A, Rifle Bearing Fan)
5VSB Circuit	-
Rectifier	1x SECOS SMPD1060L SBR (60V, 10A)

Standby PWM Controller	Excelliance MOS EM8569D
------------------------	-------------------------

Test Results

Temperature & Compliance Info

Temperature Range (°C /°F)	28-32 / 82.4-89.6
ErP Lot 3/6 Ready	✓
(EU) No 617/2013 Compliance	✓
ALPM (Alternative Low Power Mode) compatible	✓

Performance Summary

115V

Accredited	
Average Efficiency (>1450 load combinations)	89.094%
Average Noise Output (>1450 Load Combinations)	28.98dBA
Average PF (>1450 Load Combinations)	0.979
Efficiency With 10W (≤500W) or 2% (>500W) Load	74.002%
Standby Power Consumption	0.0555W
Non-Accredited	
12V Ripple (Full Load)	24.69mV
5V Ripple (Full Load)	13.07mV
3.3V Ripple (Full Load)	12.10mV
5VSB Ripple (Full Load)	17.22mV
12V Load Regulation	1.15%
5V Load Regulation	0.40%
3.3V Load Regulation	0.70%
5VSB Load Regulation	2.52%
Inrush Current	27.740A

230V

Accredited		
Average Efficiency (>1450 load combinations)	91.183%	
Average Noise Output (>1450 Load Combinations)	28.64dBA	
Average PF (>1450 Load Combinations)	0.939	
Efficiency With 10W (≤500W) or 2% (>500W) Load	-	
Standby Power Consumption	0.0889W	
Non-Accredited		
12V Ripple (Full Load)	25.15mV	
5V Ripple (Full Load)	11.67mV	
3.3V Ripple (Full Load)	11.69mV	
5VSB Ripple (Full Load)	13.13mV	
12V Load Regulation	1.14%	
5V Load Regulation	0.38%	
3.3V Load Regulation	0.67%	
5VSB Load Regulation	2.54%	
Inrush Current	96.310A	
Hold-Up Time & PWR_OK Signal	20.80ms	
AC Loss to PWR_OK Hold Up Time	18.20ms	
PWR_OK Inactive to DC Loss Delay	2.60ms	
PSU Timings: T1 (20% / 100%)	46.0ms	46.0ms
PSU Timings: T3 (20% / 100%)	130.0ms	132.0ms
OPP (27.80°C / 40.85°C)	131.38%	124.02%

Hold-Up Time & PWR_OK Signal


Hold-Up Time (ms)	20.8
AC Loss to PWR_OK Hold Up Time (ms)	18.2
PWR_OK Inactive to DC Loss Delay (ms)	2.6

Vampire Power

Graphs


115V

Power - 324H1480009915 - 02/03/2022 - 10:23

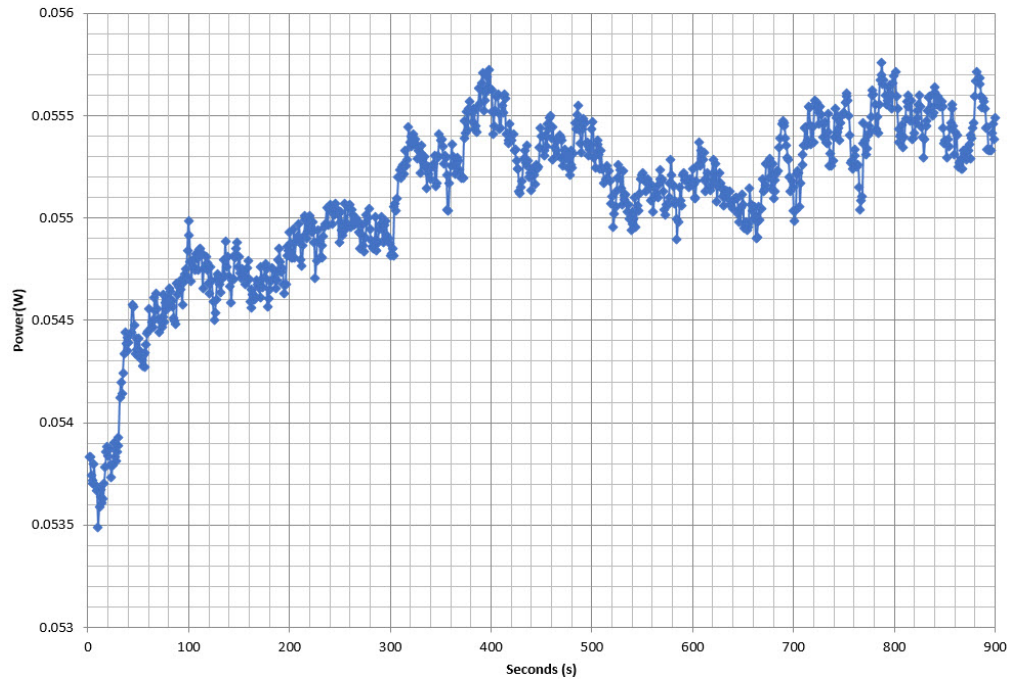


230V

Power - 324H1480009915 - 02/03/2022 - 10:23

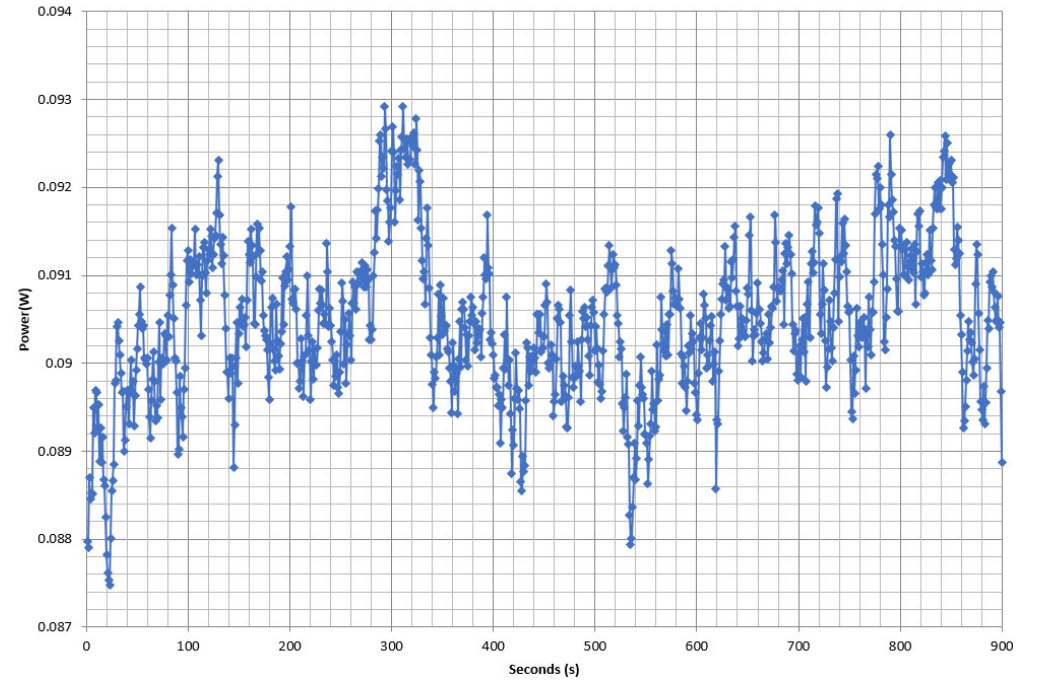


Efficiency Graph

115V

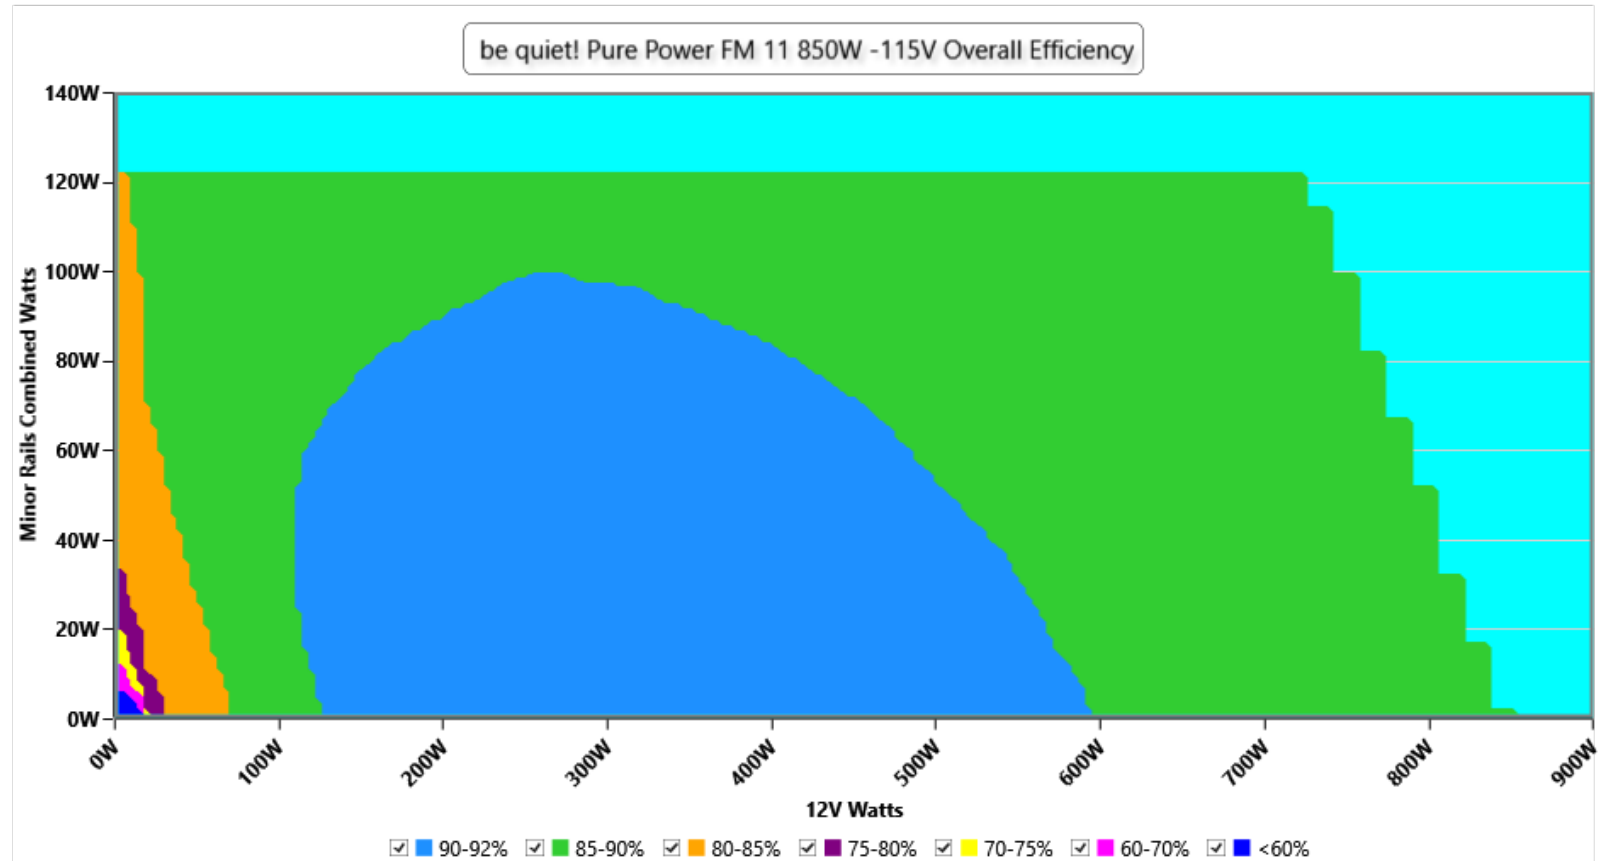

INFO

This graph depicts the PSU's efficiency throughout its entire operational range. For the generation of the efficiency and noise graphs we set our loaders to auto mode through our custom-made software before trying thousands of possible load combinations

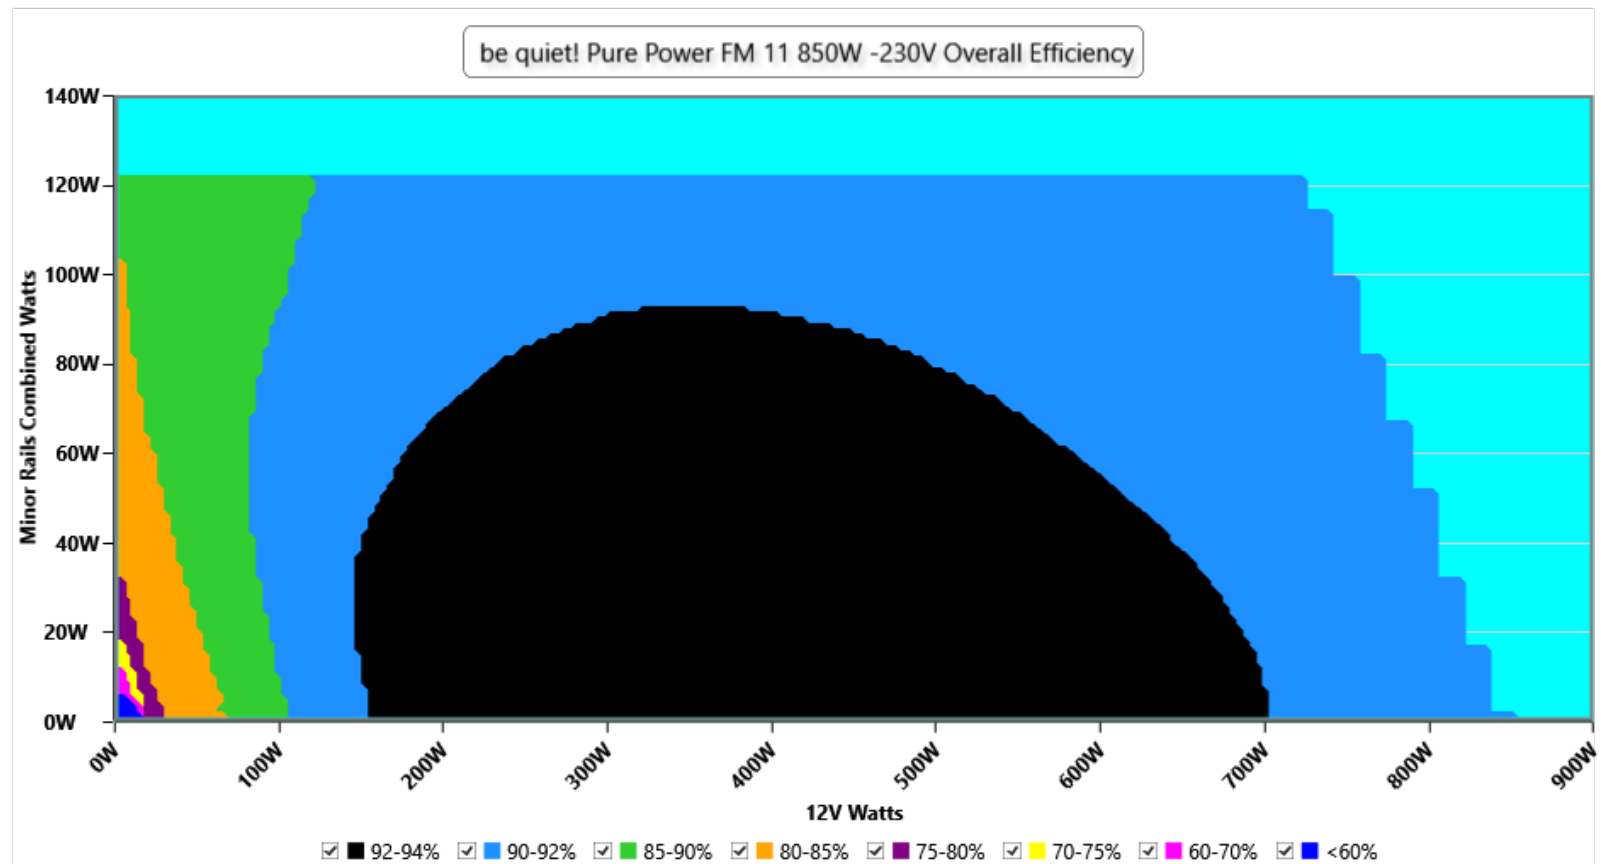


INFO

This graph depicts the PSU's efficiency throughout its entire operational range. For the generation of the efficiency and noise graphs we set our loaders to auto mode through our custom-made software before trying thousands of possible load combinations


Noise Graph

115V

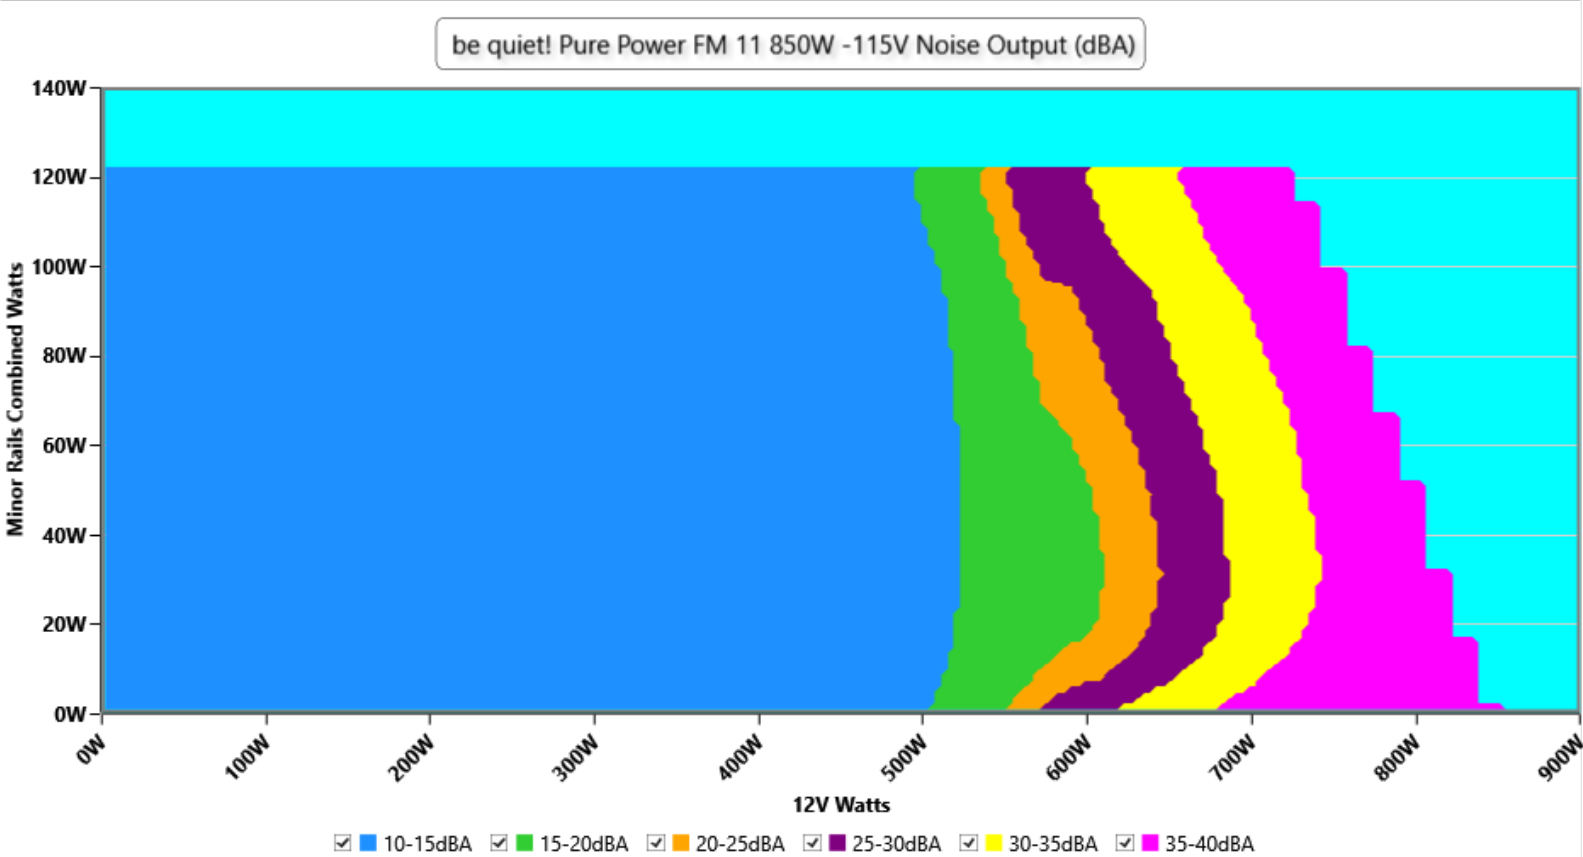

INFO

The PSU`s noise in its entire operational range and under 30-32 °C ambient is depicted in this graph. The X axis represents the load on the +12V rail(s) while the Y axis is the load on the minor rails

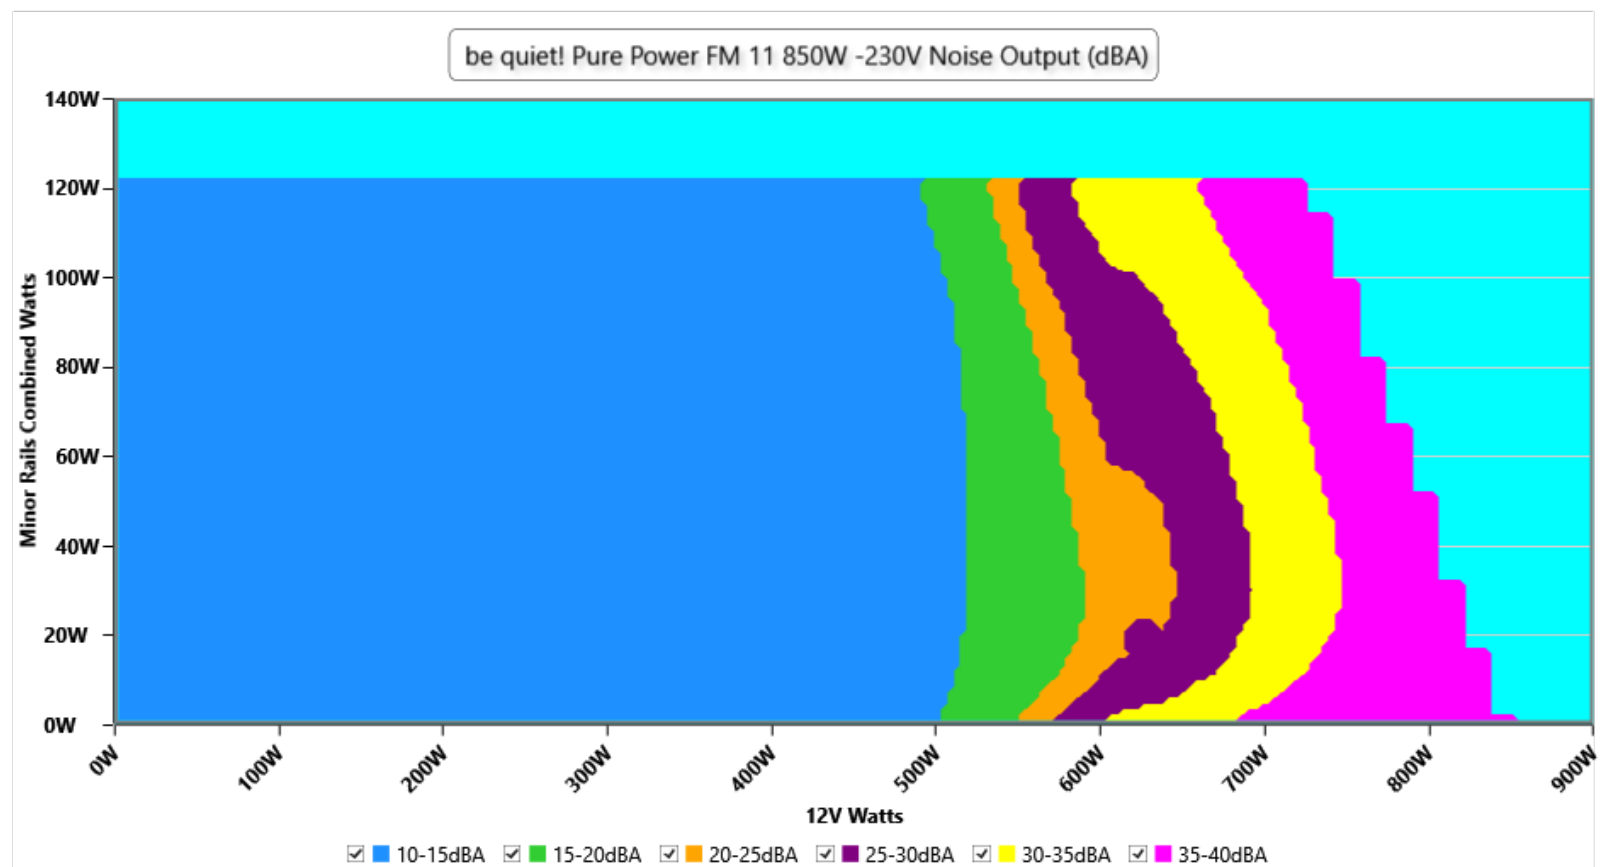

INFO


The PSU's noise in its entire operational range and under 30-32 °C ambient is depicted in this graph. The X axis represents the load on the +12V rail(s) while the Y axis is the load on the minor rails

Indicative Performance

Efficiency under high ambient temperature

Efficiency: be quiet! Pure Power 11 FM 850W

Ambient: 37°C - 47°C (98.6°F - 116.6°F)

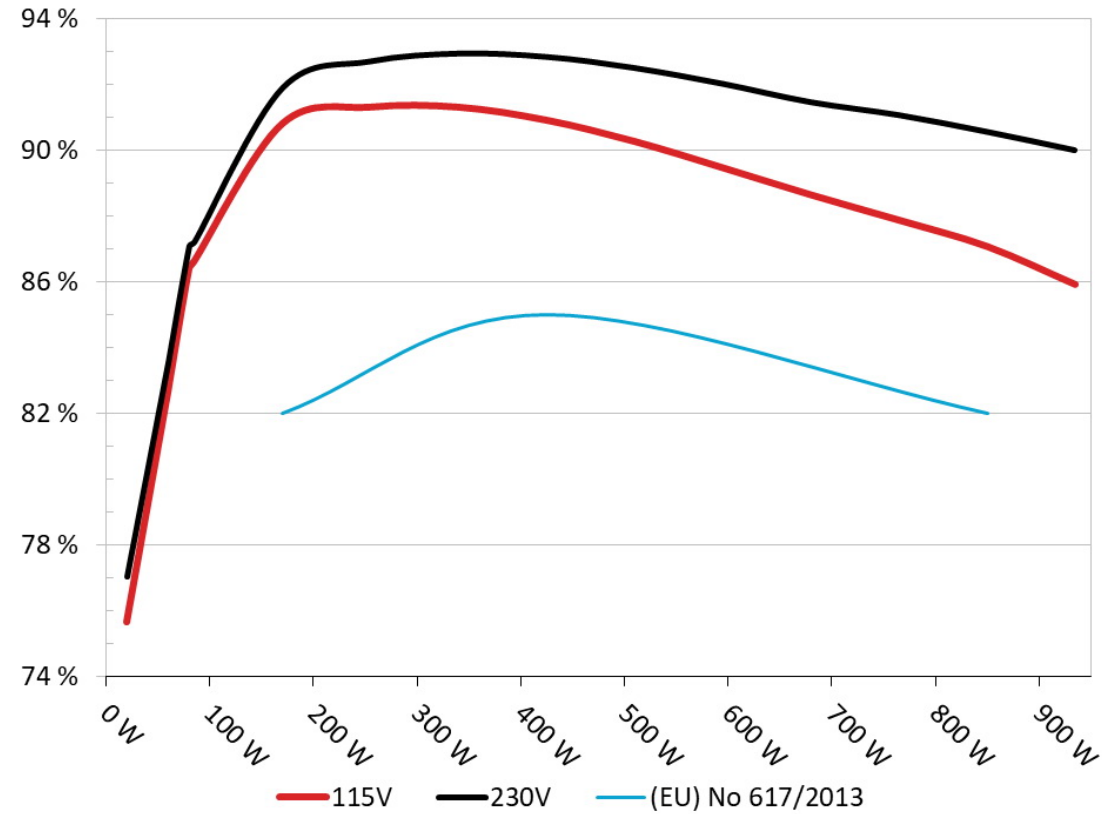


INFO

The PSU's efficiency under high ambient temperatures with 115V and 230V input. For this graph the results of the 10-110% load regulation table are used

5VSB Efficiency

5VSB Efficiency: be quiet! Pure Power 11 FM 850W

Ambient: 34°C - 36°C (93.2°F - 96.8°F)

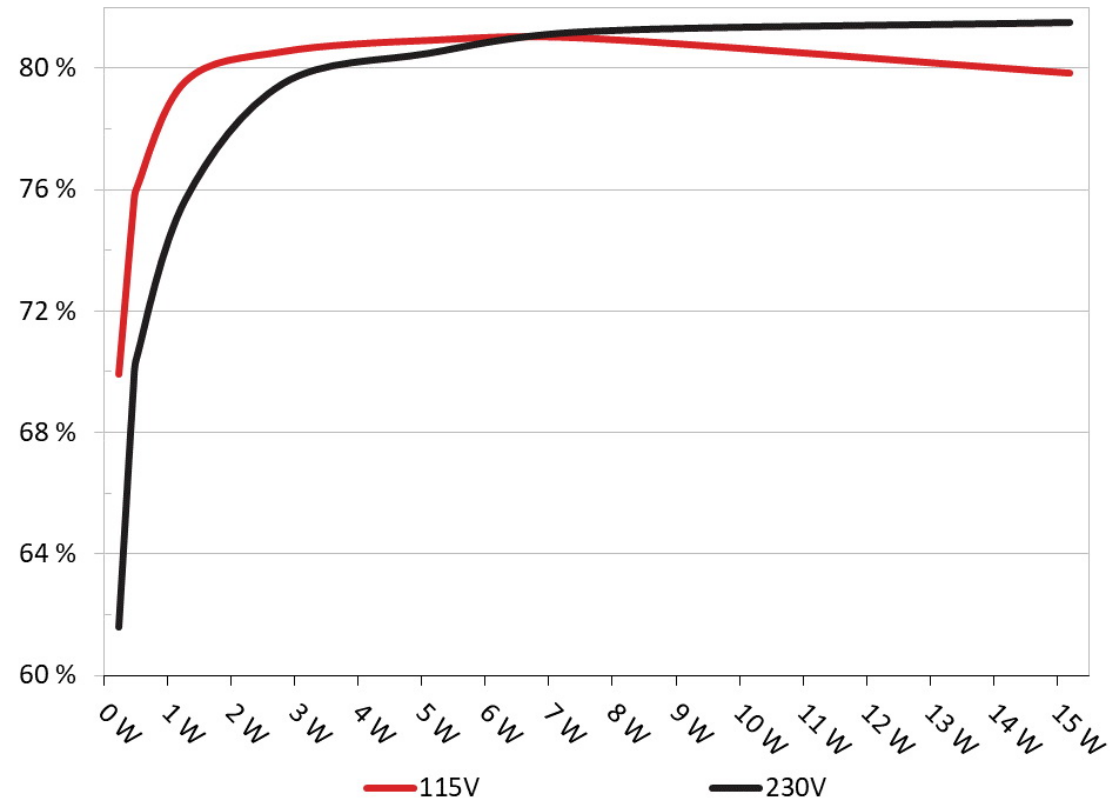

INFO

This graph depicts the efficiency levels of the 5VSB rail with 115V and 230V input

5VSB Efficiency (ERP LOT 3/6 & CEC)

115V

Test #	5VSB	DC/AC (Watts)	Efficiency	PF/AC Volts
1	0.045A	0.231W	69.913%	0.025
	5.125V	0.33W		115.1V
2	0.09A	0.461W	75.408%	0.047
	5.123V	0.611W		115.08V
3	0.55A	2.812W	80.531%	0.226
	5.114V	3.492W		115.09V
4	1A	5.104W	80.9%	0.33
	5.104V	6.309W		115.09V
5	1.5A	7.643W	80.965%	0.394
	5.095V	9.439W		115.09V
6	3A	15.197W	79.823%	0.471
	5.066V	19.038W		115.09V

230V

Test #	5VSB	DC/AC (Watts)	Efficiency	PF/AC Volts
1	0.045A	0.231W	61.601%	0.009
	5.125V	0.375W		230.24V
2	0.09A	0.461W	69.494%	0.016
	5.123V	0.663W		230.22V
3	0.55A	2.813W	79.486%	0.082
	5.113V	3.539W		230.23V
4	1A	5.105W	80.486%	0.14
	5.105V	6.343W		230.23V
5	1.5A	7.643W	81.205%	0.193
	5.095V	9.411W		230.24V
6	3A	15.197W	81.498%	0.302
	5.065V	18.647W		230.24V

Supplementary Tests (For Reference)

Typical Load Tests

115V

Test	12V	5V	3.3V	5VSB	DC/AC (Watts)	Efficiency	Fan Speed (RPM)	PSU Noise (dB[A])	Temps (In/Out)	PF/AC Volts
10%	5.208A	1.992A	2.001A	0.979A	85.005	86.626%	736	12.4	40.2°C	0.945
	12.174V	5.02V	3.297V	5.105V	98.128				44.72°C	115.09V
20%	11.445A	2.989A	3.004A	1.178A	169.963	90.809%	735	12.4	40.86°C	0.965
	12.150V	5.018V	3.295V	5.093V	187.165				45.82°C	115.09V
30%	18.038A	3.488A	3.507A	1.377A	254.97	91.315%	736	12.4	41.2°C	0.971
	12.137V	5.017V	3.293V	5.083V	279.221				46.72°C	115.1V
40%	24.648A	3.988A	4.01A	1.577A	340.065	91.312%	738	12.7	41.36°C	0.978
	12.125V	5.015V	3.291V	5.072V	372.42				47.37°C	115.1V
50%	30.918A	4.986A	5.016A	1.779A	425.035	90.915%	760	13.4	42.09°C	0.983
	12.114V	5.014V	3.29V	5.06V	467.506				48.61°C	115.1V
60%	37.164A	5.985A	6.023A	1.981A	509.555	90.271%	1047	23.7	42.87°C	0.987
	12.102V	5.013V	3.288V	5.049V	564.471				49.81°C	115.09V
70%	43.492A	6.986A	7.031A	2.184A	594.825	89.467%	1592	36.2	43.34°C	0.989
	12.088V	5.011V	3.285V	5.037V	664.855				50.81°C	115.09V
80%	49.842A	7.989A	8.041A	2.288A	679.645	88.645%	1848	40.3	43.59°C	0.991
	12.073V	5.008V	3.283V	5.027V	766.702				51.75°C	115.08V
90%	56.600A	8.491A	8.534A	2.392A	765.064	87.871%	1848	40.3	44.88°C	0.993
	12.059V	5.006V	3.281V	5.018V	870.671				53.77°C	115.08V
100%	63.117A	8.998A	9.061A	3.002A	849.862	87.071%	1854	40.4	45.76°C	0.994
	12.044V	5.002V	3.277V	4.998V	976.055				55.76°C	115.07V
110%	69.498A	9.996A	10.162A	3.007A	934.464	85.921%	1848	40.3	47.45°C	0.995
	12.032V	5.003V	3.276V	4.989V	1087.591				58.34°C	115.06V
CL1	0.115A	14.411A	14.503A	0A	121.311	84.299%	788	14.7	42.74°C	0.969
	12.158V	5.011V	3.288V	5.107V	143.909				48.01°C	115.1V

Test	12V	5V	3.3V	5VSB	DC/AC (Watts)	Efficiency	Fan Speed (RPM)	PSU Noise (dB[A])	Temps (In/Out)	PF/AC Volts
CL2	0.115A	21.959A	0A	0A	111.418	83.334%	751	13.0	43.64°C	0.967
	12.165V	5.01V	3.302V	5.116V	133.7				50.52°C	115.1V
CL3	0.115A	0A	22.093A	0A	73.98	77.162%	739	12.7	44.14°C	0.944
	12.178V	5.027V	3.285V	5.113V	95.877				51.68°C	115.11V
CL4	70.479A	0A	0A	0A	849.571	87.77%	1861	40.7	45.4°C	0.994
	12.055V	5.022V	3.292V	5.072V	967.961				55.42°C	115.07V

The results above are not used in the certification process

230V

Test	12V	5V	3.3V	5VSB	DC/AC (Watts)	Efficiency	Fan Speed (RPM)	PSU Noise (dB[A])	Temps (In/Out)	PF/AC Volts
10%	5.207A	1.991A	2.001A	0.98A	85.009	87.218%	740	13.1	40.34°C	0.808
	12.178V	5.022V	3.298V	5.105V	97.468				44.83°C	230.23V
20%	11.443A	2.989A	3.004A	1.178A	169.97	91.898%	737	12.4	40.98°C	0.901
	12.153V	5.019V	3.295V	5.092V	184.954				45.84°C	230.23V
30%	18.036A	3.489A	3.507A	1.378A	254.984	92.705%	737	12.4	41.01°C	0.935
	12.139V	5.017V	3.293V	5.082V	275.049				46.23°C	230.24V
40%	24.646A	3.988A	4.01A	1.578A	340.075	92.943%	740	13.1	41.71°C	0.948
	12.127V	5.016V	3.292V	5.071V	365.897				47.36°C	230.24V
50%	30.917A	4.986A	5.016A	1.779A	425.049	92.84%	755	13.2	42.16°C	0.959
	12.115V	5.014V	3.29V	5.059V	457.828				48.19°C	230.24V
60%	37.163A	5.986A	6.024A	1.981A	509.562	92.505%	849	17.2	42.49°C	0.963
	12.102V	5.012V	3.287V	5.048V	550.847				49.21°C	230.24V
70%	43.499A	6.989A	7.034A	2.185A	594.9	92.022%	1420	33.0	43.69°C	0.967
	12.087V	5.009V	3.284V	5.036V	646.479				50.84°C	230.24V
80%	49.849A	7.993A	8.045A	2.289A	679.724	91.464%	1814	40.0	43.71°C	0.972
	12.073V	5.006V	3.281V	5.025V	743.158				51.67°C	230.24V
90%	56.608A	8.494A	8.537A	2.393A	765.146	91.071%	1849	40.3	44.92°C	0.975
	12.059V	5.005V	3.28V	5.016V	840.161				53.61°C	230.24V

Test	12V	5V	3.3V	5VSB	DC/AC (Watts)	Efficiency	Fan Speed (RPM)	PSU Noise (dB[A])	Temps (In/Out)	PF/AC Volts
100%	63.113A	8.996A	9.061A	3.003A	849.963	90.564%	1845	40.3	45.13°C	0.977
	12.046V	5.004V	3.278V	4.996V	938.524				55.1°C	230.24V
110%	69.511A	10A	10.166A	3.008A	934.542	90.006%	1846	40.3	46.81°C	0.979
	12.031V	5.002V	3.275V	4.988V	1038.309				57.68°C	230.24V
CL1	0.115A	14.413A	14.505A	0A	121.323	85.456%	800	15.2	42.63°C	0.877
	12.159V	5.011V	3.288V	5.106V	141.971				48.65°C	230.25V
CL2	0.115A	21.955A	0A	0A	111.428	84.192%	756	13.3	43.74°C	0.867
	12.166V	5.012V	3.303V	5.115V	132.349				50.92°C	230.25V
CL3	0.115A	0A	22.093A	0A	73.988	77.622%	743	12.7	44.71°C	0.804
	12.181V	5.028V	3.286V	5.112V	95.318				53.03°C	230.25V
CL4	70.486A	0A	0A	0A	849.68	91.14%	1857	40.5	45.9°C	0.977
	12.055V	5.02V	3.29V	5.071V	932.277				55.98°C	230.25V

The results above are not used in the certification process

Light Load Tests

115V

Test	12V	5V	3.3V	5VSB	DC/AC (Watts)	Efficiency	Fan Speed (RPM)	PSU Noise (dB[A])	Temps (In/Out)	PF/AC Volts
20W	1.222A	0.498A	0.5A	0.195A	19.997	75.655%	718	11.6	36.97°C	0.844
	12.157V	5.022V	3.3V	5.124V	26.432				40.05°C	115.08V
40W	2.688A	0.697A	0.7A	0.293A	39.998	82.709%	723	11.8	38.07°C	0.918
	12.159V	5.021V	3.299V	5.121V	48.36				41.35°C	115.08V
60W	4.150A	0.896A	0.9A	0.391A	59.998	83.46%	733	12.2	39.38°C	0.952
	12.177V	5.022V	3.299V	5.12V	71.888				43.06°C	115.09V
80W	5.612A	1.095A	1.1A	0.489A	79.947	86.398%	736	12.4	39.72°C	0.943
	12.175V	5.022V	3.299V	5.117V	92.534				43.81°C	115.09V

The results above are not used in the certification process

230V

Test	12V	5V	3.3V	5VSB	DC/AC (Watts)	Efficiency	Fan Speed (RPM)	PSU Noise (dB[A])	Temps (In/Out)	PF/AC Volts
20W	1.222A	0.498A	0.5A	0.195A	20.005	77.043%	724	11.7	37.1°C	0.435
	12.163V	5.023V	3.3V	5.123V	25.966				40.11°C	230.23V
40W	2.688A	0.697A	0.7A	0.293A	40.005	83.585%	727	12.2	37.26°C	0.623
	12.162V	5.022V	3.299V	5.121V	47.862				40.59°C	230.23V
60W	4.150A	0.896A	0.9A	0.391A	60.004	83.917%	732	12	38.72°C	0.736
	12.177V	5.021V	3.299V	5.12V	71.504				42.23°C	230.23V
80W	5.612A	1.095A	1.1A	0.489A	79.961	87.089%	736	12.4	39.4°C	0.796
	12.176V	5.022V	3.299V	5.116V	91.816				43.29°C	230.23V

The results above are not used in the certification process

Ripple Measurements

115V

Test	12V	5V	3.3V	5VSB	Pass/Fail
10% Load	11.82mV	9.29mV	7.31mV	8.65mV	Pass
20% Load	13.71mV	10.01mV	7.87mV	8.39mV	Pass
30% Load	12.33mV	9.96mV	7.52mV	8.85mV	Pass
40% Load	12.69mV	9.75mV	7.93mV	9.06mV	Pass
50% Load	14.43mV	10.01mV	8.39mV	9.72mV	Pass
60% Load	15.51mV	10.78mV	8.90mV	9.98mV	Pass
70% Load	17.19mV	11.29mV	9.31mV	10.39mV	Pass
80% Load	17.91mV	11.54mV	11.56mV	11.05mV	Pass
90% Load	19.55mV	12.26mV	11.71mV	12.69mV	Pass
100% Load	24.69mV	13.07mV	12.10mV	17.22mV	Pass
110% Load	27.28mV	13.99mV	14.34mV	18.88mV	Pass
Crossload1	24.86mV	11.50mV	13.68mV	8.93mV	Pass
Crossload2	17.88mV	13.84mV	18.67mV	8.19mV	Pass

Test	12V	5V	3.3V	5VSB	Pass/Fail
Crossload3	14.28mV	11.49mV	14.58mV	7.37mV	Pass
Crossload4	24.95mV	12.30mV	9.56mV	15.32mV	Pass

The results above are not used in the certification process

230V

Test	12V	5V	3.3V	5VSB	Pass/Fail
10% Load	12.49mV	10.16mV	7.52mV	8.65mV	Pass
20% Load	12.74mV	9.65mV	7.16mV	8.19mV	Pass
30% Load	12.64mV	10.37mV	7.87mV	8.60mV	Pass
40% Load	13.05mV	10.06mV	7.52mV	8.65mV	Pass
50% Load	15.45mV	10.16mV	7.98mV	9.31mV	Pass
60% Load	15.25mV	10.37mV	8.34mV	10.13mV	Pass
70% Load	16.22mV	10.73mV	8.90mV	10.18mV	Pass
80% Load	18.63mV	10.21mV	10.13mV	11.05mV	Pass
90% Load	18.52mV	11.24mV	10.94mV	11.41mV	Pass
100% Load	25.15mV	11.67mV	11.69mV	13.13mV	Pass
110% Load	26.49mV	11.93mV	12.18mV	13.50mV	Pass
Crossload1	24.35mV	11.44mV	14.33mV	9.37mV	Pass
Crossload2	17.02mV	12.87mV	16.77mV	7.98mV	Pass
Crossload3	13.61mV	11.08mV	14.01mV	7.78mV	Pass
Crossload4	24.93mV	11.16mV	8.45mV	10.64mV	Pass

The results above are not used in the certification process

be quiet! Pure Power 11 FM 850W



Top side

All data and graphs included in this test report can be used by any individual on the following conditions:

- › It should be mentioned that the test results are provided by Cybenetics
- › The link to the original test results document should be provided in any case

CYBENETICS LTD Syrou 6, Latsia, 2231, Nicosia Cyprus

be quiet! **PURE POWER 11 FM**

AC Input	100 - 240Vac 50 - 60Hz 12 - 6A					
DC Output =	3.3V	5V	12V1	12V2	-12V	5VSB
Max. Current	22A	22A	40A	36A	0.3A	3A
			70.8A			
Max. Combined Power	120W		849.6W		3.6W	15W
	850W					

Listan GmbH | Wilhelm-Bergner-Straße 11c | 21509 Glinde | Germany
Caution! Don't remove the cover by yourself! Fixing has to be done by qualified personnel only. No parts were used that need any maintenance.
Attention ! Veuillez ne pas ouvrir le bloc. Seul du personnel qualifié est habilité à effectuer des réparations. Les composants utilisés ne requièrent aucun entretien.

Vorsicht! Umstände durch aus Es sind ke

This device con subject to the fo harmful interfere

Power specifications label

Cybenetics runs voluntary certification programs for power supplies - ETA for efficiency, LAMBDA for noise and SAFE for safety and correct operation - and for cooling products, with DELTA for chassis soundproofing and PHI for fan airflow and static pressure. THETA rates cooler performance on AMD AM5 and Intel LGA1851 outside ISO 17065 and accreditation scope

www.cybenetics.com - info@cybenetics.com