



**Make It Yours.**

# Cooler Master V750i Gold

Serial Number

Lab ID CM75002167

Certification ID 252167

Test Result Report ID: 23PS2167A

Certificate Issue Date: Apr 5, 2023

Scheme: ETA-EMI PSU

115V

230V

115V

230V

Scheme: LAMBDA PSU

Outside Validation Scope

## General Information

### Test Equipment

|                       |                                                                                     |
|-----------------------|-------------------------------------------------------------------------------------|
| Electronic Loads      | Chroma 63601-5 x2<br>Chroma 63600-2<br>Chroma 63640-80-80 x10<br>Chroma 63610-80-20 |
| AC Sources            | Chroma 6530, APM SP300VAC4000W-P, GW Instek ASR-3500                                |
| Power Analyzers       | Rohde & Schwarz HMC8015 & NPA701                                                    |
| Oscilloscopes         | Picoscope 4444, Siglent SDS2104X PLUS                                               |
| Sound Analyzer        | Bruel & Kjaer 2270 G4                                                               |
| Microphone            | Bruel & Kjaer Type 4955-A                                                           |
| Temperature Logger    | Picoscope TC-08                                                                     |
| Tachometer            | UNI-T UT372                                                                         |
| Multimeters           | Keysight 34465A                                                                     |
| EMI Analyzer          | TekBox TBMR-110M-EU                                                                 |
| Isolation Transformer | 4kVA                                                                                |
| UPS                   | FSP Champ Tower 3kVA, CyberPower OLS3000E 3kVA                                      |
| Testing Methodology   | Cybenetics PSU Test Protocol                                                        |

### DUT Information(Non-accredited measurements)

|                                   |               |
|-----------------------------------|---------------|
| Product Identification Details    |               |
| Brand                             | Cooler Master |
| Model                             | V750i Gold    |
| OEM/ODM                           | Chicony Power |
| Serial Number                     |               |
| Product Specifications            |               |
| Manufacturer-Provided Information |               |
| Rated Voltage (Vrms)              | 100-240       |
| Rated Current (Arms)              | 10-6          |

|                                                   |                                                                                     |
|---------------------------------------------------|-------------------------------------------------------------------------------------|
| Rated Frequency (Hz)                              | 50-60                                                                               |
| Rated Power (W)                                   | 750                                                                                 |
| Operating Temperature (Continuous Full Load) (°C) |                                                                                     |
| Type                                              | ATX12V                                                                              |
| Cable Design                                      | Fully Modular                                                                       |
| Warranty                                          | -                                                                                   |
| Cybenetics Measurements                           |                                                                                     |
| Dimensions (W x H x D)                            |                                                                                     |
| Weight                                            |                                                                                     |
| Cooling                                           | 135mm Fluid Dynamic Bearing Fan<br>(YY14025M12B)                                    |
| Semi-Passive Operation                            | ✓                                                                                   |
| Cybenetics Testing Information                    |                                                                                     |
| Lab ID                                            | CM75002167                                                                          |
| Date of receipt                                   | Mar 28, 2023                                                                        |
| Testing Date                                      | Apr 5, 2023                                                                         |
| Report Issued Date                                | Apr 5, 2023                                                                         |
| Engineer Name                                     | -                                                                                   |
| Authorized By the Laboratory Technical Manager    | Aristeidis Bitziopoulos                                                             |
| Signature                                         |  |

### Cables and Connectors(Non-accredited measurements)

| Modular Cables                        |             |                         |          |                     |
|---------------------------------------|-------------|-------------------------|----------|---------------------|
| Description                           | Cable Count | Connector Count (Total) | Gauge    | In Cable Capacitors |
| ATX connector 20+4 pin (650mm)        | 1           | 1                       | 18-22AWG | No                  |
| 4+4 pin EPS12V (650mm)                | 1           | 1                       | 18AWG    | No                  |
| 8 pin EPS12V (650mm)                  | 1           | 1                       | 18AWG    | No                  |
| 6+2 pin PCIe (550mm)                  | 3           | 3                       | 16-18AWG | No                  |
| 12+4 pin PCIe (650mm) (300W)          | 1           | 1                       | 16-24AWG | No                  |
| SATA (500mm+120mm+120mm+120mm)        | 3           | 12                      | 18AWG    | No                  |
| 4 pin Molex (400mm+120mm+120mm+120mm) | 1           | 4                       | 18AWG    | No                  |

|                                      |   |   |       |    |
|--------------------------------------|---|---|-------|----|
| Motherboard USB Cable (810mm)        | 1 | 1 | 24AWG | No |
| AC Power Cord (1400mm) - C13 coupler | 1 | 1 | 14AWG | -  |

### Power Specifications

|                      |       |      |    |      |      |      |
|----------------------|-------|------|----|------|------|------|
| Rail                 |       | 3.3V | 5V | 12V  | 5VSB | -12V |
| Max. Power           | Amps  | 20   | 20 | 62.5 | 3    | 0.3  |
|                      | Watts | 120  |    | 750  | 15   | 3.6  |
| Total Max. Power (W) |       | 750  |    |      |      |      |

### Parts Description

|                      |                                                                                                                                                                                                                                         |
|----------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| General Data         | -                                                                                                                                                                                                                                       |
| Manufacturer (OEM)   | Chicony Power                                                                                                                                                                                                                           |
| PCB Type             | Double Sided                                                                                                                                                                                                                            |
| Primary Side         | -                                                                                                                                                                                                                                       |
| Transient Filter     | 4x Y caps, 2x X caps, 2x CM chokes, 1x MOV                                                                                                                                                                                              |
| Inrush Protection    | 1x NTC Thermistor JNR15S100L (10 Ohm) & Relay                                                                                                                                                                                           |
| Bridge Rectifier(s)  | 2x Diodes GBU15JL (600V, 15A @ 115°C)                                                                                                                                                                                                   |
| APFC MOSFETs         | 2x Infineon IPP60R120P7 (600V, 16A @ 100°C, Rds(on): 0.120Ohm) &<br>1x Champion CM03X (reduce the no load consumption)                                                                                                                  |
| APFC Boost Diode     | 1x CREE C6D08065A (650V, 8A @ 155°C)                                                                                                                                                                                                    |
| Bulk Cap(s)          | 1x Rubycon (450V, 680uF, 3,000h @ 105°C, MXK)                                                                                                                                                                                           |
| Main Switchers       | 2x Infineon IPA60R120P7 (600V, 16A @ 100°C, Rds(on): 0.120Ohm)                                                                                                                                                                          |
| APFC Controller      | Infineon ICE2PCS01G                                                                                                                                                                                                                     |
| Resonant Controller  | MPS HR100A                                                                                                                                                                                                                              |
| Topology             | Primary side: APFC, Half-Bridge & LLC converter<br>Secondary side: Synchronous Rectification & DC-DC converters                                                                                                                         |
| Secondary Side       | -                                                                                                                                                                                                                                       |
| +12V MOSFETs         | -                                                                                                                                                                                                                                       |
| 5V & 3.3V            | DC-DC Converters: 4x Alpha & Omega AON6144 (40V, 89A @ 100°C, Rds(on): 2.4mOhm)<br>PWM Controller(s): ANPEC APW7159C                                                                                                                    |
| Filtering Capacitors | Electrolytic: 3x Nippon Chemi-Con (2-5,000h @ 105°C, KZE), 2x Nichicon (5-6,000h @ 105°C, HV), 1x Nichicon (2-4,000h @ 105°C, HD), 2x Rubycon (6-10,000h @ 105°C, ZLH)<br>Polymer: 11x Nippon Chemi-Con, 7x FPCAP, 10x NIC, 2x Nichicon |

|                        |                                                                                                                                                 |
|------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------|
| Supervisor IC          | Weltrend WT7502R                                                                                                                                |
| ARM Microcontroller    | Nuvoton M032EC1AE (USB connectivity & Fan control)                                                                                              |
| Fan Model              | Snowfan YY14025M12B (135mm, 12V, 0.40A, Fluid Dynamic Bearing Fan)                                                                              |
| 5VSB Circuit           | -                                                                                                                                               |
| Rectifier              | STMicroelectronics STD4N80K5 FET(800V, 1.7A @ 100°C, Rds(on): 2.5Ohm) &1x Advanced Power AP6N6R5LMT-L FET (60V, 16.9A @ 70°C, Rds(on): 6.5mOhm) |
| Standby PWM Controller | OnSemiconductor NCP12400                                                                                                                        |
| -12V Circuit           | -                                                                                                                                               |
| Rectifier              | UTC LM7912L (-12V, 1A)                                                                                                                          |

## Test Results

### Temperature & Compliance Info

|                                              |                   |
|----------------------------------------------|-------------------|
| Temperature Range (°C /°F)                   | 28-32 / 82.4-89.6 |
| ErP Lot 3/6 Ready                            | ✓                 |
| (EU) No 617/2013 Compliance                  | ✓                 |
| ALPM (Alternative Low Power Mode) compatible | ✓                 |
| ATX v3.0 Compliance                          | ✓                 |

### Performance Summary

#### 115V

|                                                |          |
|------------------------------------------------|----------|
| Accredited                                     |          |
| Average Efficiency (>1450 load combinations)   | 89.578%  |
| Average Noise Output (>1450 Load Combinations) | 22.80dBA |
| Average PF (>1450 Load Combinations)           | 0.991    |
| Efficiency With 10W (≤500W) or 2% (>500W) Load | 72.803%  |
| Standby Power Consumption                      | 0.0474W  |
| Non-Accredited                                 |          |
| 12V Ripple (Full Load)                         | 23.51mV  |
| 5V Ripple (Full Load)                          | 18.18mV  |
| 3.3V Ripple (Full Load)                        | 21.88mV  |

|                         |         |
|-------------------------|---------|
| 5VSB Ripple (Full Load) | 27.61mV |
| 12V Load Regulation     | 0.53%   |
| 5V Load Regulation      | 0.88%   |
| 3.3V Load Regulation    | 0.61%   |
| 5VSB Load Regulation    | 3.49%   |
| Inrush Current          | 23.140A |

## 230V

|                                                |          |        |
|------------------------------------------------|----------|--------|
| Accredited                                     |          |        |
| Average Efficiency (>1450 load combinations)   | 91.487%  |        |
| Average Noise Output (>1450 Load Combinations) | 22.82dBA |        |
| Average PF (>1450 Load Combinations)           | 0.952    |        |
| Efficiency With 10W (≤500W) or 2% (>500W) Load | 69.992%  |        |
| Standby Power Consumption                      | 0.1291W  |        |
| Non-Accredited                                 |          |        |
| 12V Ripple (Full Load)                         | 23.63mV  |        |
| 5V Ripple (Full Load)                          | 19.31mV  |        |
| 3.3V Ripple (Full Load)                        | 21.97mV  |        |
| 5VSB Ripple (Full Load)                        | 28.24mV  |        |
| 12V Load Regulation                            | 0.53%    |        |
| 5V Load Regulation                             | 0.84%    |        |
| 3.3V Load Regulation                           | 0.58%    |        |
| 5VSB Load Regulation                           | 3.43%    |        |
| Inrush Current                                 | 78.310A  |        |
| 12V Transient Response (200%)                  | 11.50V   |        |
| 5V Transient Response (200%)                   | 4.963V   |        |
| 3.3V Transient Response (200%)                 | 3.212V   |        |
| 5VSB Transient Response (200%)                 | 4.923V   |        |
| Hold-Up Time & PWR_OK Signal                   | 31.60ms  |        |
| AC Loss to PWR_OK Hold Up Time                 | 22.50ms  |        |
| PWR_OK Inactive to DC Loss Delay               | 9.10ms   |        |
| PSU Timings: T1 (20% / 100%)                   | 56.5ms   | 51.5ms |

|                              |         |         |
|------------------------------|---------|---------|
| PSU Timings: T3 (20% / 100%) | 129.0ms | 128.0ms |
| OPP (27.97°C / 39.60°C)      | 122.77% | 120.61% |

## Hold-Up Time & PWR\_OK Signal

|                                       |      |
|---------------------------------------|------|
| Hold-Up Time (ms)                     | 31.6 |
| AC Loss to PWR_OK Hold Up Time (ms)   | 22.5 |
| PWR_OK Inactive to DC Loss Delay (ms) | 9.1  |

## Vampire Power

### Tables

#### 115V

| Detailed Results   |          |          |           |          |           |        |
|--------------------|----------|----------|-----------|----------|-----------|--------|
|                    | Average  | Min      | Limit Min | Max      | Limit Max | Result |
| Mains Voltage RMS: | 115.12 V | 115.11 V | 113.85 V  | 115.15 V | 116.15 V  | PASS   |
| Mains Frequency:   | 60.00 Hz | 59.95 Hz | 59.40 Hz  | 60.01 Hz | 60.60 Hz  | PASS   |
| Mains Voltage CF:  | 1.415    | 1.415    | 1.340     | 1.416    | 1.490     | PASS   |
| Mains Voltage THD: | 0.13 %   | 0.10 %   | N/A       | 0.15 %   | 2.00 %    | PASS   |
| Real Power:        | 0.047 W  | 0.011 W  | N/A       | 0.070 W  | N/A       | N/A    |
| Apparent Power:    | 6.968 W  | 6.962 W  | N/A       | 6.986 W  | N/A       | N/A    |
| Power Factor:      | 0.009    | N/A      | N/A       | N/A      | N/A       | N/A    |


#### 230V

| Detailed Results   |          |          |           |          |           |        |
|--------------------|----------|----------|-----------|----------|-----------|--------|
|                    | Average  | Min      | Limit Min | Max      | Limit Max | Result |
| Mains Voltage RMS: | 230.25 V | 230.22 V | 227.70 V  | 230.31 V | 232.30 V  | PASS   |
| Mains Frequency:   | 50.00 Hz | 50.00 Hz | 49.50 Hz  | 50.01 Hz | 50.50 Hz  | PASS   |
| Mains Voltage CF:  | 1.415    | 1.415    | 1.340     | 1.415    | 1.490     | PASS   |

|                    |          |          |     |          |        |      |
|--------------------|----------|----------|-----|----------|--------|------|
| Mains Voltage THD: | 0.14 %   | 0.13 %   | N/A | 0.16 %   | 2.00 % | PASS |
| Real Power:        | 0.129 W  | 0.117 W  | N/A | 0.141 W  | N/A    | N/A  |
| Apparent Power:    | 23.260 W | 23.238 W | N/A | 23.277 W | N/A    | N/A  |
| Power Factor:      | 0.005    | N/A      | N/A | N/A      | N/A    | N/A  |


## Efficiency Graph

115V

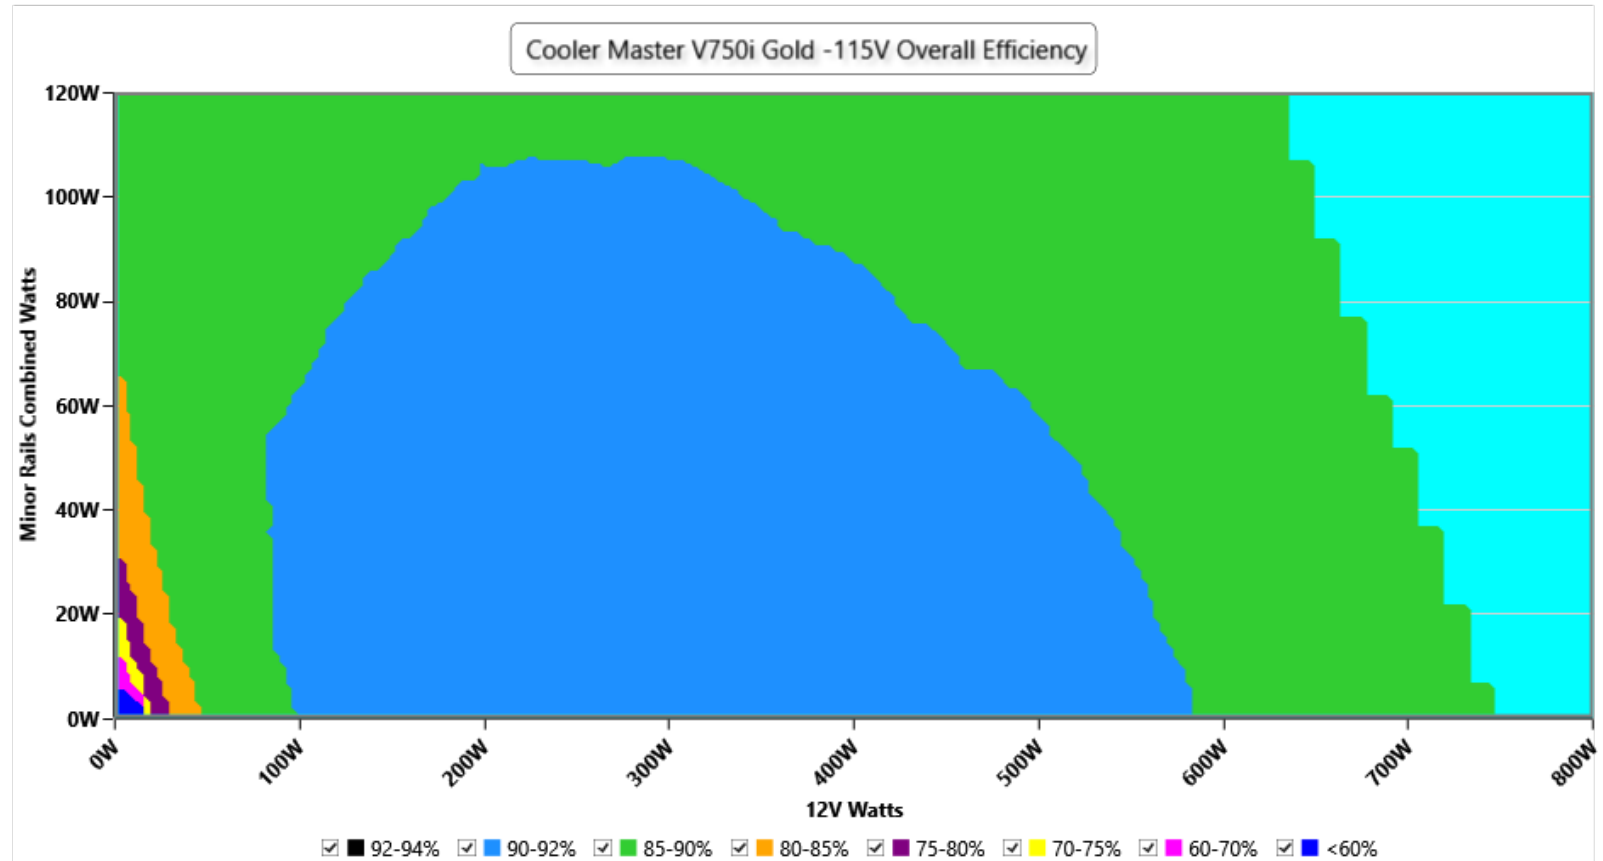

### INFO

This graph depicts the PSU's efficiency throughout its entire operational range. For the generation of the efficiency and noise graphs we set our loaders to auto mode through our custom-made software before trying thousands of possible load combinations

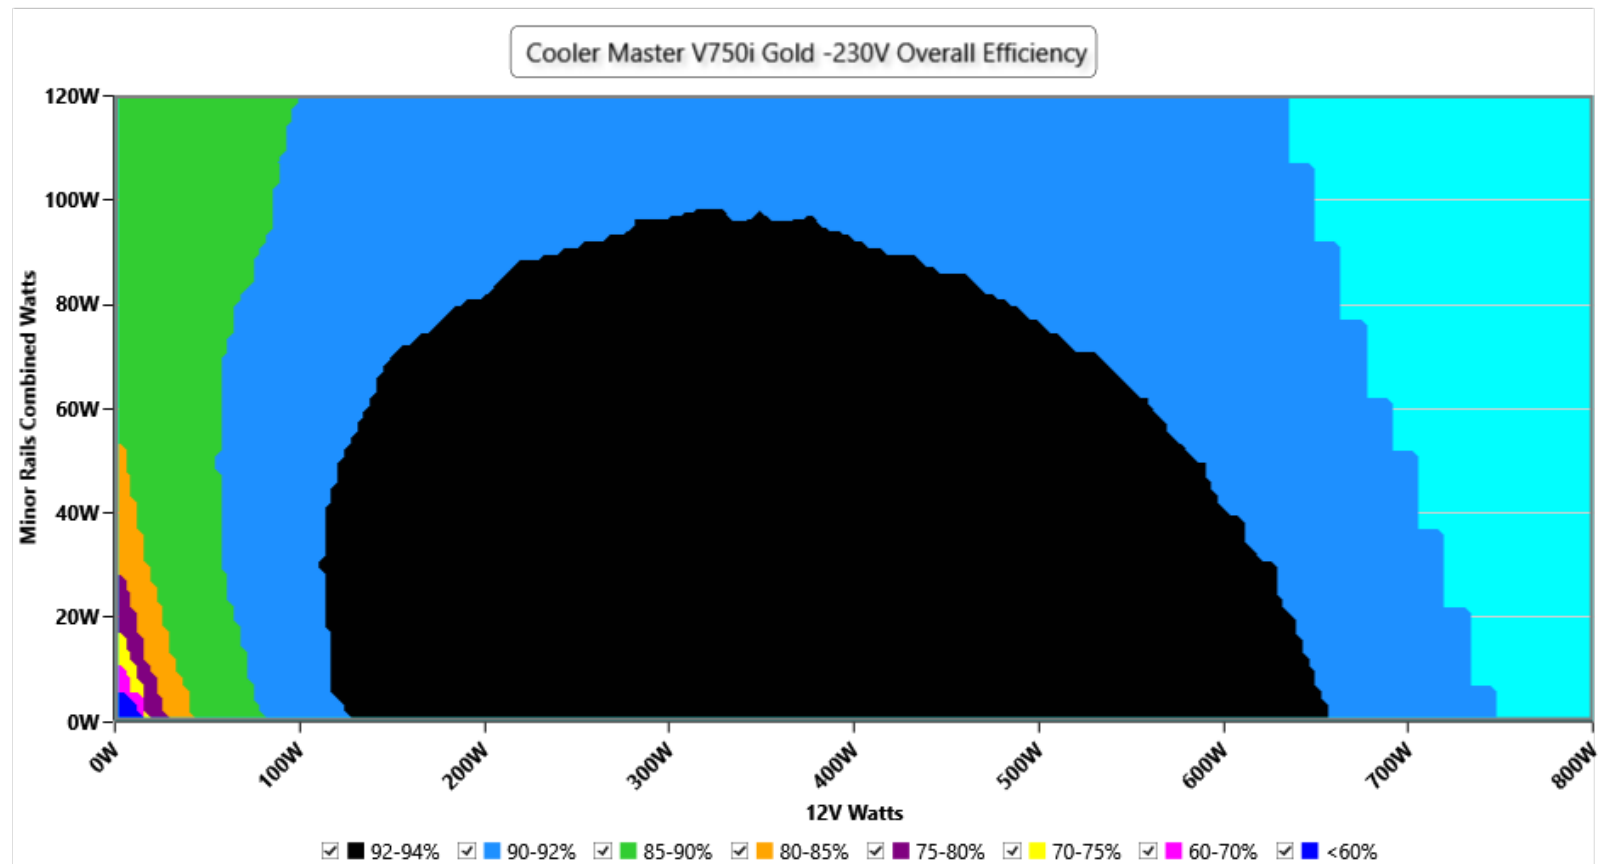


### INFO

This graph depicts the PSU's efficiency throughout its entire operational range. For the generation of the efficiency and noise graphs we set our loaders to auto mode through our custom-made software before trying thousands of possible load combinations


# Noise Graph

115V

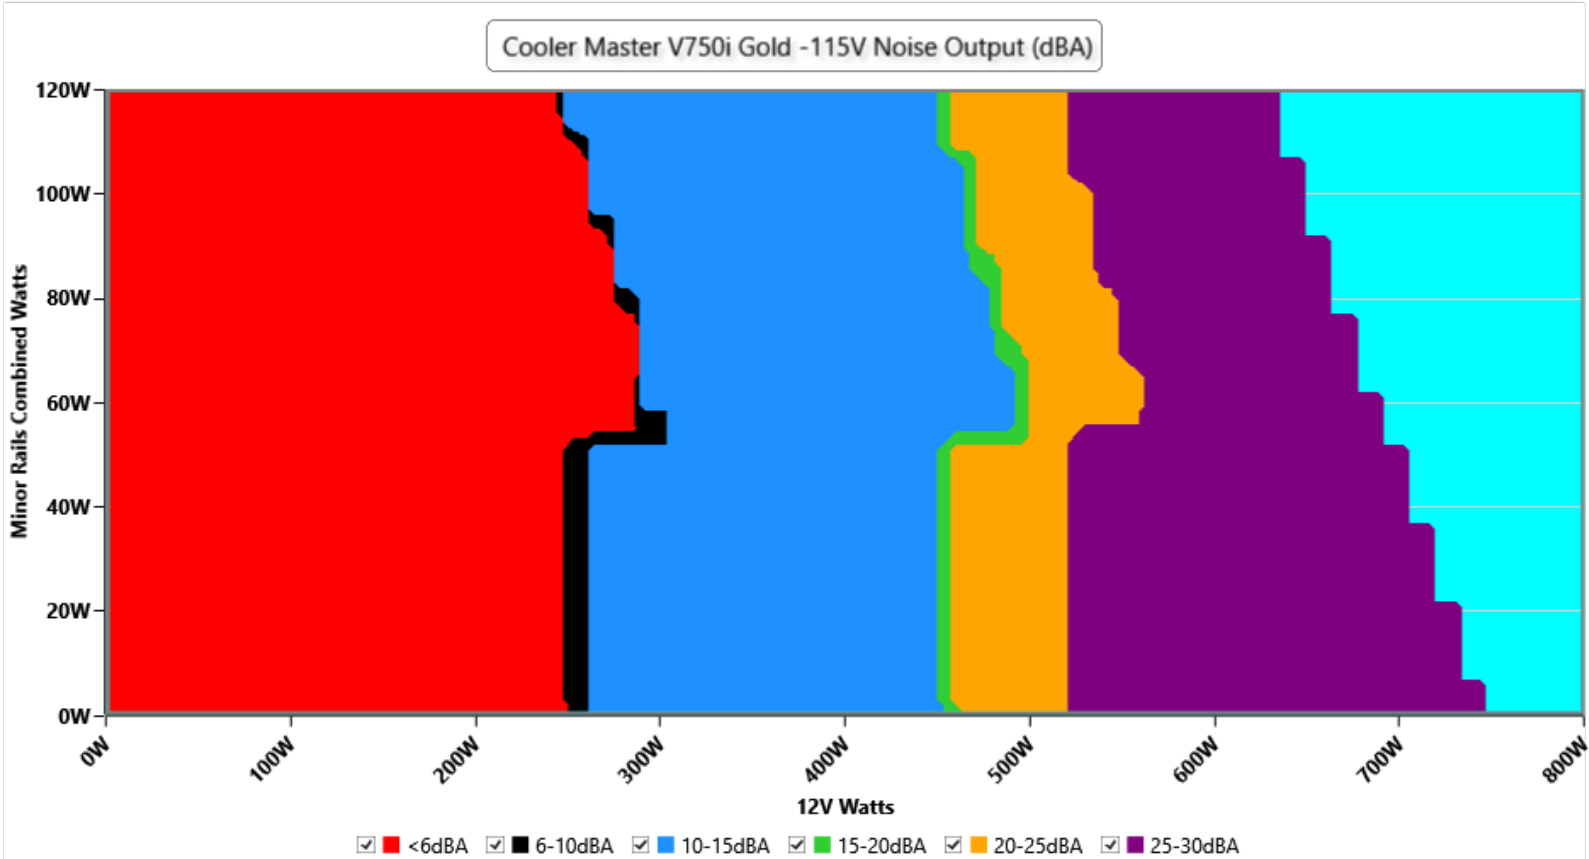

## INFO

The PSU`s noise in its entire operational range and under 30-32 °C ambient is depicted in this graph. The X axis represents the load on the +12V rail(s) while the Y axis is the load on the minor rails

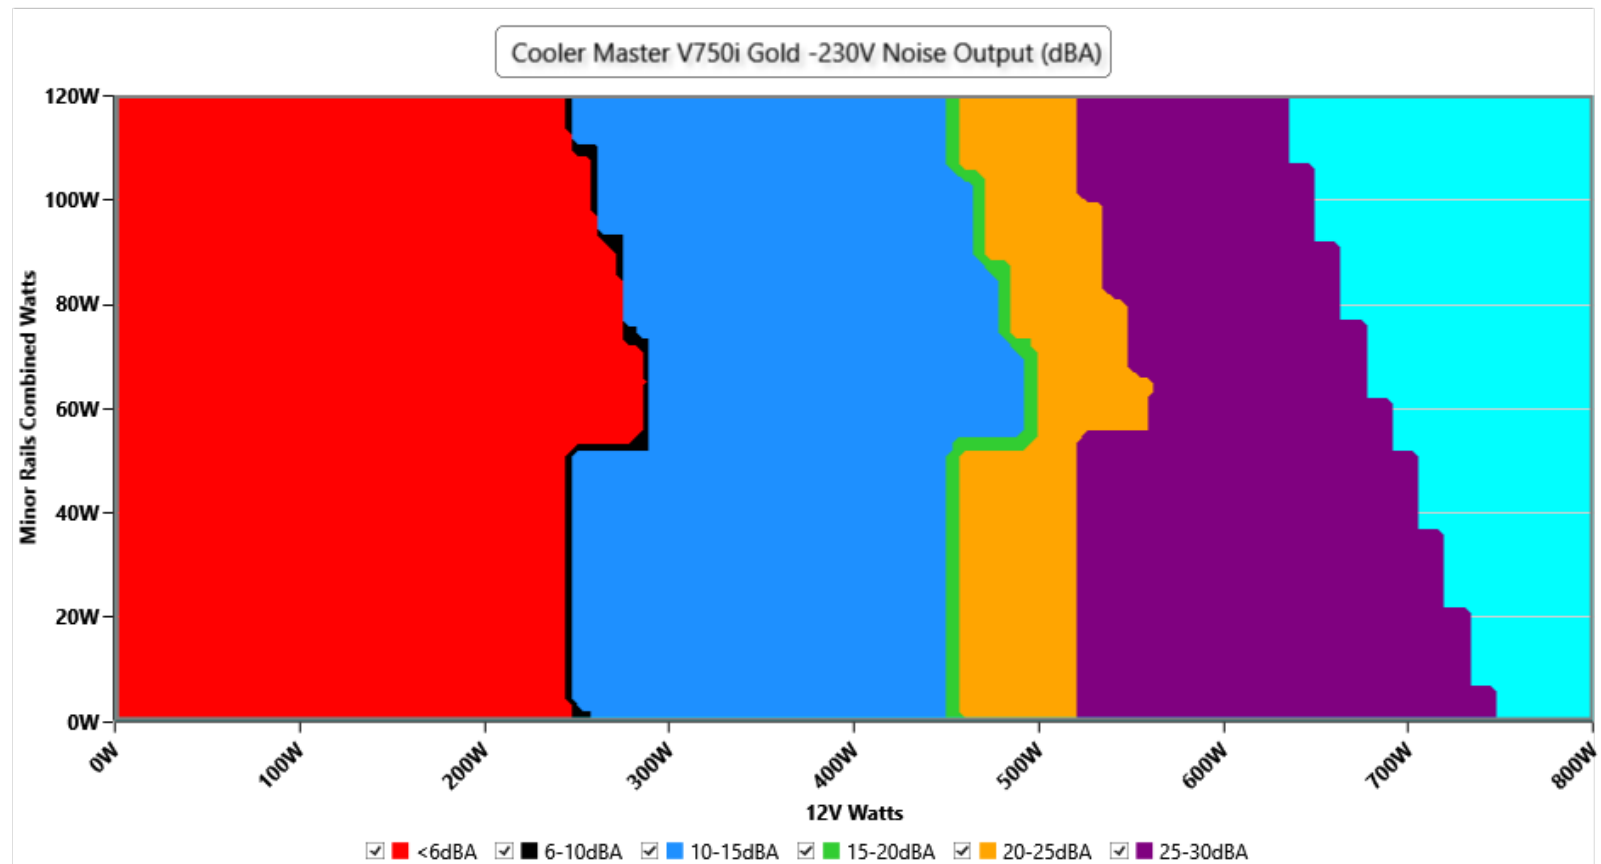

### INFO


The PSU's noise in its entire operational range and under 30-32 °C ambient is depicted in this graph. The X axis represents the load on the +12V rail(s) while the Y axis is the load on the minor rails

## Indicative Performance

### Efficiency under high ambient temperature

Efficiency: Cooler Master V750i Gold

Ambient: 37°C - 47°C (98.6°F - 116.6°F)

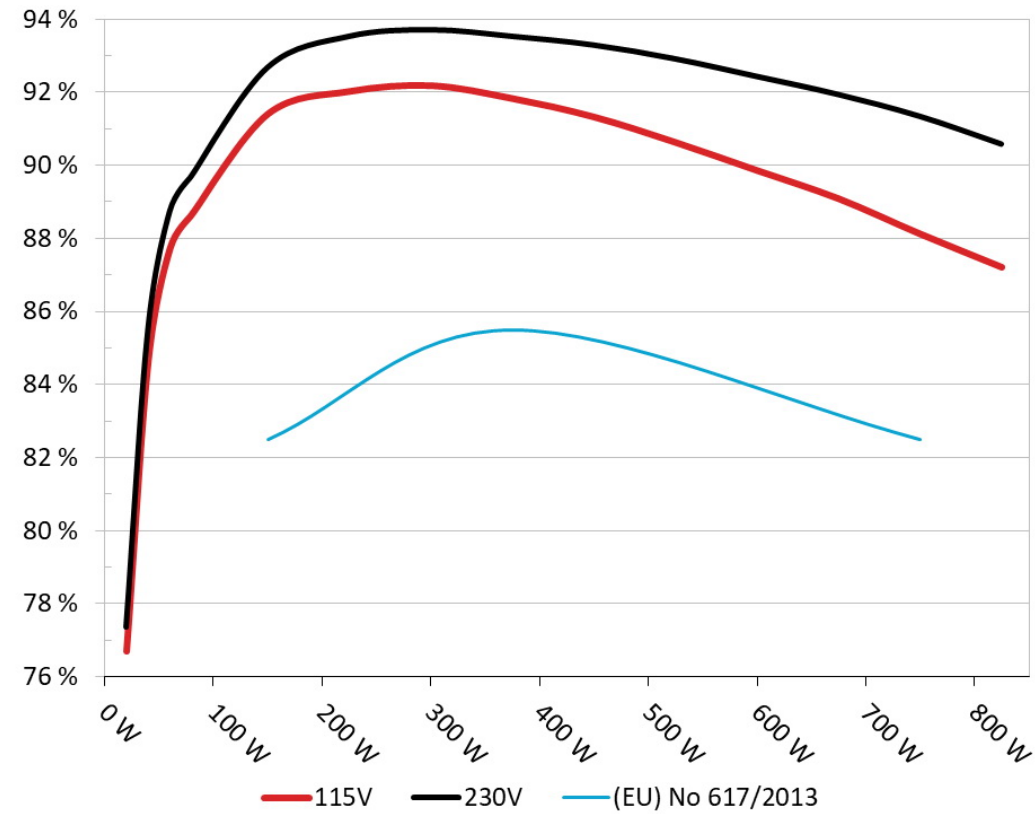


### INFO

The PSU's efficiency under high ambient temperatures with 115V and 230V input. For this graph the results of the 10-110% load regulation table are used

## 5VSB Efficiency

### 5VSB Efficiency: Cooler Master V750i Gold

Ambient: 34°C - 36°C (93.2°F - 96.8°F)

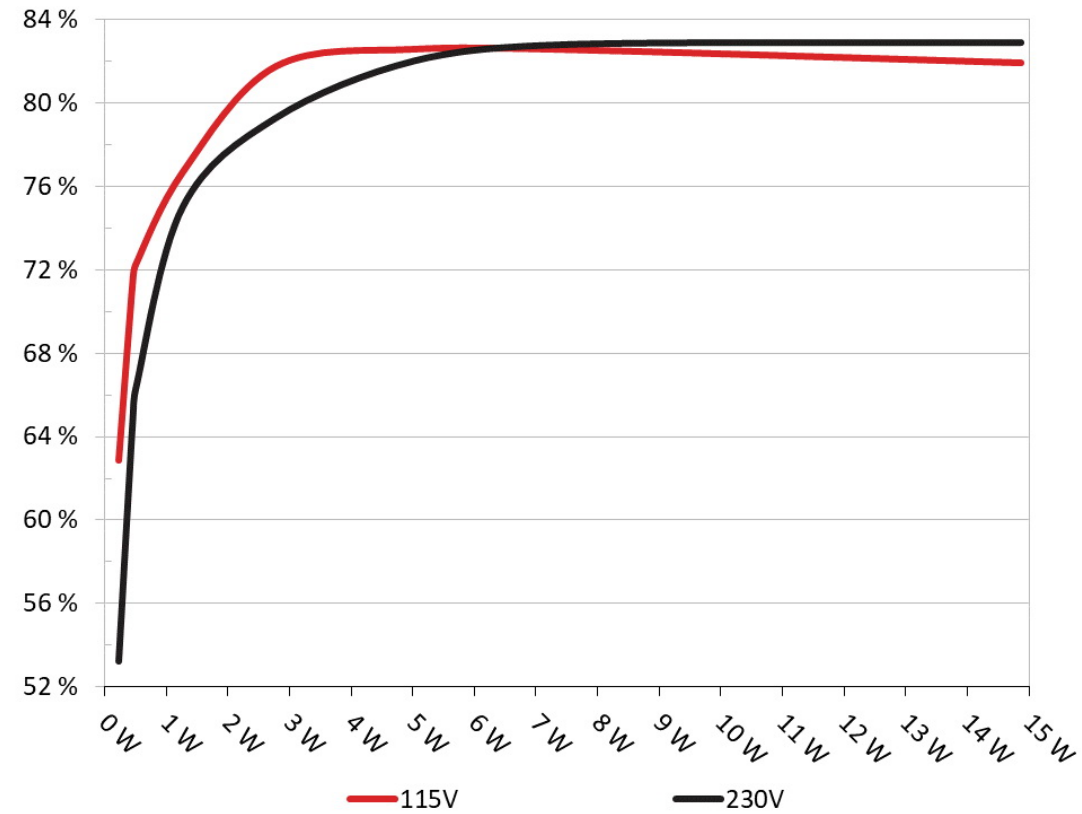

### INFO

This graph depicts the efficiency levels of the 5VSB rail with 115V and 230V input

### 5VSB Efficiency (ERP LOT 3/6 & CEC)

#### 115V

| Test # | 5VSB   | DC/AC (Watts) | Efficiency | PF/AC Volts |
|--------|--------|---------------|------------|-------------|
| 1      | 0.045A | 0.228W        | 63.362%    | 0.051       |
|        | 5.075V | 0.36W         |            | 115.16V     |
| 2      | 0.09A  | 0.457W        | 72.039%    | 0.088       |
|        | 5.072V | 0.634W        |            | 115.16V     |
| 3      | 0.55A  | 2.776W        | 82.259%    | 0.333       |
|        | 5.045V | 3.375W        |            | 115.16V     |
| 4      | 1A     | 5.027W        | 83.087%    | 0.43        |
|        | 5.025V | 6.05W         |            | 115.16V     |
| 5      | 1.5A   | 7.516W        | 83.066%    | 0.481       |
|        | 5.01V  | 9.048W        |            | 115.16V     |
| 6      | 3A     | 14.877W       | 82.431%    | 0.533       |
|        | 4.958V | 18.049W       |            | 115.16V     |

#### 230V

| Test # | 5VSB   | DC/AC (Watts) | Efficiency | PF/AC Volts |
|--------|--------|---------------|------------|-------------|
| 1      | 0.045A | 0.228W        | 53.716%    | 0.018       |
|        | 5.074V | 0.425W        |            | 230.4V      |
| 2      | 0.09A  | 0.457W        | 65.395%    | 0.03        |
|        | 5.072V | 0.699W        |            | 230.39V     |
| 3      | 0.55A  | 2.776W        | 79.775%    | 0.139       |
|        | 5.046V | 3.48W         |            | 230.39V     |
| 4      | 1A     | 5.026W        | 82.516%    | 0.219       |
|        | 5.025V | 6.091W        |            | 230.38V     |
| 5      | 1.5A   | 7.514W        | 83.304%    | 0.285       |
|        | 5.008V | 9.02W         |            | 230.37V     |
| 6      | 3A     | 14.877W       | 83.394%    | 0.389       |
|        | 4.958V | 17.84W        |            | 230.37V     |

## Supplementary Tests (For Reference)

### Typical Load Tests

#### 115V

| Test | 12V     | 5V      | 3.3V    | 5VSB   | DC/AC (Watts) | Efficiency | Fan Speed (RPM) | PSU Noise (dB[A]) | Temps (In/Out) | PF/AC Volts |
|------|---------|---------|---------|--------|---------------|------------|-----------------|-------------------|----------------|-------------|
| 10%  | 4.430A  | 1.982A  | 2.002A  | 0.996A | 74.995        | 88.141%    | 0               | <6.0              | 43.85°C        | 0.954       |
|      | 12.052V | 5.047V  | 3.296V  | 5.022V | 85.086        |            |                 |                   | 39.69°C        | 115.15V     |
| 20%  | 9.884A  | 2.975A  | 3.005A  | 1.198A | 149.946       | 90.891%    | 0               | <6.0              | 44.77°C        | 0.985       |
|      | 12.045V | 5.042V  | 3.294V  | 5.008V | 164.975       |            |                 |                   | 40.19°C        | 115.13V     |
| 30%  | 15.690A | 3.474A  | 3.508A  | 1.402A | 224.948       | 91.509%    | 0               | <6.0              | 46.57°C        | 0.991       |
|      | 12.039V | 5.038V  | 3.293V  | 4.994V | 245.817       |            |                 |                   | 41.56°C        | 115.11V     |
| 40%  | 21.510A | 3.973A  | 4.011A  | 1.606A | 300.032       | 91.668%    | 0               | <6.0              | 47.59°C        | 0.994       |
|      | 12.033V | 5.035V  | 3.291V  | 4.982V | 327.305       |            |                 |                   | 41.97°C        | 115.09V     |
| 50%  | 26.938A | 4.971A  | 5.017A  | 1.812A | 374.495       | 91.316%    | 441             | 10.1              | 42.37°C        | 0.996       |
|      | 12.027V | 5.03V   | 3.289V  | 4.969V | 410.104       |            |                 |                   | 48.31°C        | 115.07V     |
| 60%  | 32.410A | 5.971A  | 6.024A  | 2A     | 449.332       | 90.815%    | 441             | 10.1              | 42.95°C        | 0.997       |
|      | 12.021V | 5.025V  | 3.287V  | 4.956V | 494.779       |            |                 |                   | 49.39°C        | 115.05V     |
| 70%  | 37.891A | 6.972A  | 7.031A  | 2.226A | 524.373       | 90.119%    | 442             | 10.1              | 43.02°C        | 0.997       |
|      | 12.015V | 5.021V  | 3.286V  | 4.942V | 581.86        |            |                 |                   | 50.04°C        | 115.04V     |
| 80%  | 43.442A | 7.974A  | 8.037A  | 2.332A | 599.584       | 89.349%    | 802             | 24.0              | 43.28°C        | 0.997       |
|      | 12.009V | 5.017V  | 3.284V  | 4.932V | 671.073       |            |                 |                   | 51.38°C        | 115.02V     |
| 90%  | 49.332A | 8.477A  | 8.528A  | 2.437A | 674.611       | 88.575%    | 992             | 30.2              | 44.87°C        | 0.998       |
|      | 12.003V | 5.013V  | 3.282V  | 4.924V | 761.626       |            |                 |                   | 53.88°C        | 115V        |
| 100% | 55.031A | 8.984A  | 9.051A  | 3.064A | 749.864       | 87.608%    | 1469            | 41.3              | 45.17°C        | 0.998       |
|      | 11.996V | 5.009V  | 3.28V   | 4.896V | 855.928       |            |                 |                   | 55.25°C        | 114.98V     |
| 110% | 60.599A | 9.989A  | 10.152A | 3.068A | 824.858       | 86.698%    | 1475            | 41.4              | 47.3°C         | 0.998       |
|      | 11.990V | 5.005V  | 3.279V  | 4.89V  | 951.428       |            |                 |                   | 58.22°C        | 114.96V     |
| CL1  | 0.116A  | 14.346A | 14.506A | 0A     | 121.283       | 85.227%    | 0               | <6.0              | 51.16°C        | 0.979       |
|      | 12.041V | 5.032V  | 3.288V  | 5.041V | 142.308       |            |                 |                   | 45.66°C        | 115.13V     |

| Test | 12V     | 5V     | 3.3V    | 5VSB   | DC/AC (Watts) | Efficiency | Fan Speed (RPM) | PSU Noise (dB[A]) | Temps (In/Out) | PF/AC Volts |
|------|---------|--------|---------|--------|---------------|------------|-----------------|-------------------|----------------|-------------|
| CL2  | 0.116A  | 19.84A | 0A      | 0A     | 101.386       | 84.442%    | 0               | <6.0              | 48.84°C        | 0.97        |
|      | 12.048V | 5.04V  | 3.291V  | 5.066V | 120.064       |            |                 |                   | 41.56°C        | 115.15V     |
| CL3  | 0.116A  | 0A     | 20.019A | 0A     | 67.38         | 78.92%     | 458             | 10.9              | 42.18°C        | 0.955       |
|      | 12.044V | 5.048V | 3.296V  | 5.042V | 85.377        |            |                 |                   | 51.19°C        | 115.15V     |
| CL4  | 62.457A | 0A     | 0A      | 0A     | 749.609       | 88.217%    | 997             | 30.3              | 45.83°C        | 0.998       |
|      | 12.002V | 5.027V | 3.291V  | 5.043V | 849.741       |            |                 |                   | 56.79°C        | 114.98V     |

The results above are not used in the certification process

## 230V

| Test | 12V     | 5V     | 3.3V   | 5VSB   | DC/AC (Watts) | Efficiency | Fan Speed (RPM) | PSU Noise (dB[A]) | Temps (In/Out) | PF/AC Volts |
|------|---------|--------|--------|--------|---------------|------------|-----------------|-------------------|----------------|-------------|
| 10%  | 4.430A  | 1.982A | 2.002A | 0.996A | 74.988        | 89.211%    | 0               | <6.0              | 43.86°C        | 0.792       |
|      | 12.053V | 5.045V | 3.296V | 5.022V | 84.058        |            |                 |                   | 39.57°C        | 230.33V     |
| 20%  | 9.880A  | 2.976A | 3.005A | 1.198A | 149.919       | 92.187%    | 0               | <6.0              | 45.27°C        | 0.901       |
|      | 12.046V | 5.041V | 3.294V | 5.008V | 162.626       |            |                 |                   | 40.45°C        | 230.33V     |
| 30%  | 15.686A | 3.474A | 3.508A | 1.401A | 224.91        | 93.042%    | 0               | <6.0              | 46.35°C        | 0.939       |
|      | 12.040V | 5.037V | 3.292V | 4.995V | 241.733       |            |                 |                   | 41.02°C        | 230.32V     |
| 40%  | 21.504A | 3.973A | 4.01A  | 1.606A | 299.991       | 93.223%    | 0               | <6.0              | 48.26°C        | 0.959       |
|      | 12.034V | 5.034V | 3.291V | 4.983V | 321.802       |            |                 |                   | 42.28°C        | 230.32V     |
| 50%  | 26.927A | 4.971A | 5.016A | 1.811A | 374.375       | 93.044%    | 440             | 10.1              | 42.65°C        | 0.972       |
|      | 12.028V | 5.029V | 3.289V | 4.97V  | 402.366       |            |                 |                   | 49.11°C        | 230.31V     |
| 60%  | 32.399A | 5.971A | 6.023A | 2A     | 449.221       | 92.807%    | 441             | 10.1              | 43.32°C        | 0.98        |
|      | 12.022V | 5.025V | 3.287V | 4.958V | 484.042       |            |                 |                   | 50.39°C        | 230.3V      |
| 70%  | 37.880A | 6.972A | 7.031A | 2.225A | 524.255       | 92.43%     | 442             | 10.1              | 43.86°C        | 0.985       |
|      | 12.016V | 5.021V | 3.285V | 4.944V | 567.192       |            |                 |                   | 51.41°C        | 230.29V     |
| 80%  | 43.431A | 7.974A | 8.037A | 2.331A | 599.478       | 91.946%    | 803             | 24.0              | 44.28°C        | 0.988       |
|      | 12.009V | 5.017V | 3.284V | 4.934V | 651.984       |            |                 |                   | 52.45°C        | 230.28V     |
| 90%  | 49.322A | 8.477A | 8.529A | 2.437A | 674.513       | 91.451%    | 993             | 30.2              | 44.84°C        | 0.989       |
|      | 12.003V | 5.013V | 3.282V | 4.925V | 737.569       |            |                 |                   | 53.92°C        | 230.27V     |

| Test | 12V     | 5V      | 3.3V    | 5VSB   | DC/AC (Watts) | Efficiency | Fan Speed (RPM) | PSU Noise (dB[A]) | Temps (In/Out) | PF/AC Volts |
|------|---------|---------|---------|--------|---------------|------------|-----------------|-------------------|----------------|-------------|
| 100% | 55.022A | 8.983A  | 9.051A  | 3.064A | 749.743       | 90.851%    | 997             | 30.3              | 45.28°C        | 0.99        |
|      | 11.996V | 5.009V  | 3.28V   | 4.897V | 825.246       |            |                 |                   | 55.37°C        | 230.26V     |
| 110% | 60.595A | 9.989A  | 10.153A | 3.068A | 824.779       | 90.091%    | 1482            | 41.6              | 47.06°C        | 0.991       |
|      | 11.989V | 5.005V  | 3.279V  | 4.89V  | 915.502       |            |                 |                   | 57.98°C        | 230.24V     |
| CL1  | 0.116A  | 14.345A | 14.505A | 0A     | 121.278       | 86.477%    | 0               | <6.0              | 43.33°C        | 0.882       |
|      | 12.042V | 5.033V  | 3.288V  | 5.041V | 140.236       |            |                 |                   | 37.89°C        | 230.34V     |
| CL2  | 0.115A  | 19.841A | 0A      | 0A     | 101.382       | 85.581%    | 0               | <6.0              | 42.21°C        | 0.858       |
|      | 12.048V | 5.04V   | 3.291V  | 5.066V | 118.46        |            |                 |                   | 35.12°C        | 230.34V     |
| CL3  | 0.115A  | 0A      | 20.021A | 0A     | 67.377        | 79.967%    | 453             | 10.6              | 39.18°C        | 0.794       |
|      | 12.044V | 5.048V  | 3.296V  | 5.042V | 84.257        |            |                 |                   | 48.23°C        | 230.34V     |
| CL4  | 62.445A | 0A      | 0A      | 0A     | 749.534       | 91.478%    | 996             | 30.3              | 45.18°C        | 0.99        |
|      | 12.003V | 5.028V  | 3.292V  | 5.043V | 819.372       |            |                 |                   | 55.99°C        | 230.26V     |

The results above are not used in the certification process

## Light Load Tests

### 115V

| Test | 12V     | 5V     | 3.3V   | 5VSB   | DC/AC (Watts) | Efficiency | Fan Speed (RPM) | PSU Noise (dB[A]) | Temps (In/Out) | PF/AC Volts |
|------|---------|--------|--------|--------|---------------|------------|-----------------|-------------------|----------------|-------------|
| 20W  | 1.232A  | 0.495A | 0.5A   | 0.197A | 20            | 76.186%    | 0               | <6.0              | 40.39°C        | 0.823       |
|      | 12.059V | 5.053V | 3.3V   | 5.067V | 26.251        |            |                 |                   | 37.34°C        | 115.16V     |
| 40W  | 2.711A  | 0.693A | 0.7A   | 0.296A | 39.996        | 84.157%    | 0               | <6.0              | 41.27°C        | 0.913       |
|      | 12.057V | 5.053V | 3.3V   | 5.061V | 47.526        |            |                 |                   | 37.99°C        | 115.15V     |
| 60W  | 4.191A  | 0.891A | 0.9A   | 0.396A | 59.993        | 87.214%    | 0               | <6.0              | 42.36°C        | 0.943       |
|      | 12.055V | 5.052V | 3.3V   | 5.056V | 68.787        |            |                 |                   | 38.59°C        | 115.15V     |
| 80W  | 5.668A  | 1.089A | 1.1A   | 0.495A | 79.95         | 88.883%    | 0               | <6.0              | 43.42°C        | 0.957       |
|      | 12.053V | 5.051V | 3.299V | 5.049V | 89.947        |            |                 |                   | 39.44°C        | 115.15V     |

The results above are not used in the certification process

## 230V

| Test | 12V     | 5V     | 3.3V   | 5VSB   | DC/AC (Watts) | Efficiency | Fan Speed (RPM) | PSU Noise (dB[A]) | Temps (In/Out) | PF/AC Volts |
|------|---------|--------|--------|--------|---------------|------------|-----------------|-------------------|----------------|-------------|
| 20W  | 1.230A  | 0.495A | 0.5A   | 0.197A | 19.985        | 76.849%    | 0               | <6.0              | 39.62°C        | 0.517       |
|      | 12.060V | 5.051V | 3.299V | 5.065V | 26.005        |            |                 |                   | 36.52°C        | 230.31V     |
| 40W  | 2.710A  | 0.693A | 0.7A   | 0.296A | 39.985        | 84.985%    | 0               | <6.0              | 40.35°C        | 0.645       |
|      | 12.057V | 5.05V  | 3.299V | 5.06V  | 47.051        |            |                 |                   | 37.07°C        | 230.31V     |
| 60W  | 4.190A  | 0.891A | 0.9A   | 0.396A | 59.984        | 88.242%    | 0               | <6.0              | 40.89°C        | 0.741       |
|      | 12.055V | 5.05V  | 3.298V | 5.054V | 67.975        |            |                 |                   | 37.44°C        | 230.32V     |
| 80W  | 5.666A  | 1.089A | 1.1A   | 0.495A | 79.922        | 90.12%     | 0               | <6.0              | 41.87°C        | 0.803       |
|      | 12.054V | 5.049V | 3.298V | 5.048V | 88.683        |            |                 |                   | 38.06°C        | 230.32V     |

The results above are not used in the certification process

## Ripple Measurements

## 115V

| Test       | 12V     | 5V      | 3.3V    | 5VSB    | Pass/Fail |
|------------|---------|---------|---------|---------|-----------|
| 10% Load   | 7.86mV  | 6.24mV  | 10.13mV | 10.40mV | Pass      |
| 20% Load   | 8.37mV  | 7.47mV  | 11.92mV | 11.62mV | Pass      |
| 30% Load   | 9.65mV  | 7.77mV  | 12.69mV | 16.36mV | Pass      |
| 40% Load   | 9.96mV  | 8.13mV  | 13.05mV | 33.44mV | Pass      |
| 50% Load   | 11.34mV | 8.90mV  | 14.89mV | 48.33mV | Pass      |
| 60% Load   | 12.05mV | 10.07mV | 14.79mV | 43.08mV | Pass      |
| 70% Load   | 13.18mV | 11.25mV | 16.22mV | 38.13mV | Pass      |
| 80% Load   | 14.81mV | 12.84mV | 18.84mV | 38.54mV | Pass      |
| 90% Load   | 15.94mV | 14.06mV | 21.39mV | 34.72mV | Pass      |
| 100% Load  | 23.51mV | 18.18mV | 21.88mV | 27.61mV | Pass      |
| 110% Load  | 25.54mV | 19.17mV | 22.74mV | 25.68mV | Pass      |
| Crossload1 | 16.04mV | 19.83mV | 21.56mV | 20.19mV | Pass      |
| Crossload2 | 11.75mV | 12.68mV | 12.23mV | 18.45mV | Pass      |

| Test       | 12V     | 5V      | 3.3V    | 5VSB    | Pass/Fail |
|------------|---------|---------|---------|---------|-----------|
| Crossload3 | 9.55mV  | 18.46mV | 22.88mV | 17.64mV | Pass      |
| Crossload4 | 22.78mV | 9.86mV  | 13.87mV | 22.40mV | Pass      |

The results above are not used in the certification process

## 230V

| Test       | 12V     | 5V      | 3.3V    | 5VSB    | Pass/Fail |
|------------|---------|---------|---------|---------|-----------|
| 10% Load   | 7.92mV  | 6.49mV  | 10.95mV | 14.48mV | Pass      |
| 20% Load   | 8.38mV  | 7.21mV  | 11.92mV | 12.13mV | Pass      |
| 30% Load   | 9.45mV  | 7.77mV  | 13.31mV | 21.10mV | Pass      |
| 40% Load   | 9.60mV  | 8.13mV  | 13.87mV | 33.92mV | Pass      |
| 50% Load   | 10.83mV | 9.46mV  | 14.54mV | 41.81mV | Pass      |
| 60% Load   | 13.13mV | 10.18mV | 15.81mV | 40.24mV | Pass      |
| 70% Load   | 13.43mV | 11.66mV | 15.86mV | 36.82mV | Pass      |
| 80% Load   | 15.38mV | 13.40mV | 19.70mV | 32.83mV | Pass      |
| 90% Load   | 15.99mV | 15.03mV | 20.68mV | 35.27mV | Pass      |
| 100% Load  | 23.63mV | 19.31mV | 21.97mV | 28.24mV | Pass      |
| 110% Load  | 25.17mV | 20.56mV | 21.94mV | 29.40mV | Pass      |
| Crossload1 | 15.86mV | 19.95mV | 20.82mV | 21.36mV | Pass      |
| Crossload2 | 11.39mV | 12.99mV | 12.54mV | 19.78mV | Pass      |
| Crossload3 | 10.42mV | 18.61mV | 23.65mV | 17.49mV | Pass      |
| Crossload4 | 22.75mV | 10.04mV | 14.49mV | 22.93mV | Pass      |

The results above are not used in the certification process

Cooler Master V750i Gold



Top side

All data and graphs included in this test report can be used by any individual on the following conditions:

- › It should be mentioned that the test results are provided by Cybenetics
- › The link to the original test results document should be provided in any case

CYBENETICS LTD Syrou 6, Latsia, 2231, Nicosia Cyprus

750W

|             |                                            |       |       |      |       |
|-------------|--------------------------------------------|-------|-------|------|-------|
| AC INPUT    | 100-240V~, 10-6A, 50-60Hz                  |       |       |      |       |
| 交流輸入/交流輸入   | 200-240V~, 6A, 50-60Hz, For Korea Use Only |       |       |      |       |
|             | 200-240V~, 6A, 50-60Hz, 适用于中国地区使用          |       |       |      |       |
| DC OUTPUT   | +5V                                        | +3.3V | +12V  | -12V | +5VSB |
| 直流輸出/直流輸出   | 20A                                        | 20A   | 62.5A | 0.3A | 3A    |
| TOTAL POWER | 120W                                       |       | 750W  | 3.6W | 15W   |
| 總功率/总功率     | 750W                                       |       |       |      |       |


Power specifications label

Cybenetics runs voluntary certification programs for power supplies - ETA for efficiency, LAMBDA for noise and SAFE for safety and correct operation - and for cooling products, with DELTA for chassis soundproofing and PHI for fan airflow and static pressure. THETA rates cooler performance on AMD AM5 and Intel LGA1851 outside ISO 17065 and accreditation scope

[www.cybenetics.com](http://www.cybenetics.com) - [info@cybenetics.com](mailto:info@cybenetics.com)