Seasonic Prime Noctua Edition TX-1600

Serial Number STR2-1600 A3B0810154

Lab ID SS16002521

Certification ID 252521

Test Result Report ID: 24PS2521A

Certificate Issue Date: Jul 30, 2024

Scheme: ETA-EMI PSU

115V: CYBENETICS TITANIUM

230V: CYBENETICS TITANIUM 230v

Scheme: LAMBDA PSU

115V: CYBENETICS A++

230V: CYBENETICS A++ 230v

CYBENETICS ATX 3.1 PASS

Outside Validation Scope

General Information

Test Equipment

Electronic Loads	Chroma 63601-5 x2 Chroma 63600-2 Chroma 63640-80-80 x10 Chroma 63610-80-20
AC Sources	Chroma 6530, APM SP300VAC4000W-P, GW Instek ASR-3500
Power Analyzers	Rohde & Schwarz HMC8015 & NPA701
Oscilloscopes	Picoscope 4444, Siglent SDS2104X PLUS
Sound Analyzer	Bruel & Kjaer 2270 G4
Microphone	Bruel & Kjaer Type 4955-A
Temperature Logger	Picoscope TC-08
Tachometer	UNI-T UT372
Multimeters	Keysight 34465A
EMI Analyzer	TekBox TBMR-110M-EU
Isolation Transformer	4kVA
UPS	FSP Champ Tower 3kVA, CyberPower OLS3000E 3kVA
Testing Methodology	Cybenetics PSU Test Protocol

DUT Information(Non-accredited measurements)

Product Identification Details	
Brand	Seasonic
Model	Prime Noctua Edition TX-1600
OEM/ODM	Seasonic
Serial Number	STR2-1600 A3B0810154
Product Specifications	
Manufacturer-Provided Information	
Rated Voltage (Vrms)	100-240
Rated Current (Arms)	15-10

Rated Frequency (Hz)	50-60
Rated Power (W)	1600
Operating Temperature (Continuous Full Load) (°C)	
Type	ATX12V
Cable Design	Fully Modular
Warranty	-
Cybenetics Measurements	
Dimensions (W x H x D)	
Weight	
Cooling	120mm Hydraulic Bearing Fan (NF-A12X25)
Semi-Passive Operation	✓ (selectable)
Cybenetics Testing Information	
Lab ID	SS16002521
Date of receipt	Jul 23, 2024
Testing Date	Jul 29, 2024
Report Issued Date	Jul 30, 2024
Engineer Name	-
Authorized By the Laboratory Technical Manager	Aristeidis Bitziopoulos
Signature	

Cables and Connectors(Non-accredited measurements)

Modular Cables				
Description	**Cable Count**	**Connector Count (Total)**	**Gauge**	In Cable Capacitors
ATX connector 20+4 pin (610mm)	1	1	16-18AWG	No
4+4 pin EPS12V (700mm)	3	3	16AWG	No
6+2 pin PCIe (750mm)	6	6	16AWG	No
12+4 pin PCIe (750mm) (600W)	2	2	16-28AWG	No
SATA (510mm+155mm+155mm+155mm)	4	16	16AWG	No
SATA 3.3 (410mm+160mm)	1	2	18AWG	No
4-pin Molex (460mm+125mm+125mm)	1	3	18AWG	No

AC Power Cord (1390mm) - C19 coupler	1	1	16AWG	-

Protection Features(Manufacturer)

Over Power Protection	✓
Over Current (+12V) Protection	✓
Over Temperature Protection	✓
Short Circuit Protection	✓
Surge Protection	✓
Inrush Current Protection	✓
Fan Failure Protection	✓

Power Specifications

Rail		3.3V	5V	12V	5VSB	-12V
Max. Power	Amps	25	25	133.33	3	0.5
	Watts	125		1600	15	6
Total Max. Power (W)		1600				

Parts Description

General Data	
Manufacturer (OEM)	Seasonic
PCB Type	Double-Sided
Primary Side	
Transient Filter	6x Y caps, 3x X caps, 2x CM chokes, 1x MOV
Inrush Protection	2x NTC Thermistor MF72-20D20M (20 Ohm) & Relay
Rectifier FETs	4x IPB60R040C7 600V ,1x LL25XB60 25A 600V
APFC MOSFETs	4x Infineon IPA60R099P6 (600V, 24A @ 100°C, Rds(on): 0.099Ohm)
APFC Boost Diode	2x Cree C6D10065A (650V, 10A @ 155°C)
Bulk Cap(s)	3x Nippon Chemi-Con (420V, 820uF each or 2460uF combined, 2,000h @ 105°C,KHE)
Main Switchers	4x Infineon IPA60R080P7 (600V, 23A @ 100°C, Rds(on): 0.08Ohm)
Drivers IC	2x Silicon Labs Si8233BD
APFC Controller	Texas Instruments UCD28070

Resonant Controller	Champion CM6901T2X
Topology	Primary side: Bridgeless, Interleaved PFC, Full-Bridge & LLC converter Secondary side: Synchronous Rectification & DC-DC converters
Secondary Side	
+12V MOSFETs	16x Nexperia PSMN1R0-40YLD (40V, 198A @ 100°C, Rds(on): 1.93mOhm)
5V & 3.3V	DC-DC Converters
Filtering Capacitors	Electrolytic: 5x Nippon Chemi-Con (105°C, W), 1x Nippon Chemi-Con (5-6,000h @ 105°C, KZH), 1x Nippon Chemi-Con (2-5,000h @ 105°C, KZE), 3x Rubycon (6-10,000h @ 105°C, ZLH), 1x Rubycon (3-6,000h @ 105°C, YXG) Polymer: 18x Nippon Chemi-Con, 20x Nichicon (FPCAP)
Supervisor IC	Weltrend WT7527RA (OCP, OVP, UVP, SCP, PG)
Fan Controller	Nuvoton M031
Fan Model	Noctua NF-A12X25 (120mm, 12V, 0.14A, Hydraulic Bearing Fan)
5VSB Circuit	
Rectifier	1x Infineon BSC100N06LS3 FET (60V, 36A @ 100°C, Rds(on): 10mOhm)
Standby PWM Controller	Power Integrations INN3164C

Test Results

Temperature & Compliance Info

Temperature Range (°C /°F)	28-32 / 82.4-89.6
ErP Lot 3/6 Ready	✓
(EU) No 617/2013 Compliance	✓
ALPM (Alternative Low Power Mode) compatible	✓
ATX v3.1 PSU Power Excursion	✓

Performance Summary

115V

Accredited	
Average Efficiency (>1450 load combinations)	92.224%
Average Noise Output (>1450 Load Combinations)	12.64dBA
Average PF (>1450 Load Combinations)	0.990
Efficiency With 10W (≤500W) or 2% (>500W) Load	71.725%
Standby Power Consumption	0.0347W
Non-Accredited	
12V Ripple (Full Load)	16.76mV
5V Ripple (Full Load)	7.94mV
3.3V Ripple (Full Load)	10.58mV
5VSB Ripple (Full Load)	33.04mV
12V Load Regulation	1.41%
5V Load Regulation	0.68%
3.3V Load Regulation	1.34%
5VSB Load Regulation	0.73%
Inrush Current	17.530A

230V

Accredited	
Average Efficiency (>1450 load combinations)	93.989%
Average Noise Output (>1450 Load Combinations)	13.03dBA
Average PF (>1450 Load Combinations)	0.948
Efficiency With 10W (≤500W) or 2% (>500W) Load	70.903%
Standby Power Consumption	0.0984W
Non-Accredited	
12V Ripple (Full Load)	17.11mV
5V Ripple (Full Load)	8.19mV
3.3V Ripple (Full Load)	10.90mV

5VSB Ripple (Full Load)	32.74mV	
12V Load Regulation	1.42%	
5V Load Regulation	0.68%	
3.3V Load Regulation	1.31%	
5VSB Load Regulation	0.65%	
Inrush Current	34.590A	
12V Transient Response (200%)	11.27V	
5V Transient Response (200%)	4.949V	
3.3V Transient Response (200%)	3.160V	
5VSB Transient Response (200%)	4.892V	
Hold-Up Time & PWR_OK Signal	24.10ms	
AC Loss to PWR_OK Hold Up Time	20.70ms	
PWR_OK Inactive to DC Loss Delay	3.40ms	
PSU Timings: T1 (20% / 100%)	69.0ms	40.0ms
PSU Timings: T3 (20% / 100%)	129.0ms	128.0ms
12V OCP (29.7°C / 44.2°C)	177.20A (132.90%), 12.012V	176.20A (132.15%), 12.003V
5V OCP (29.7°C / 44.2°C)	34.6A (138.40%), 4.984V	34.5A (138.00%), 4.977V
3.3V OCP (29.7°C / 44.2°C)	36.7A (146.80%), 3.293V	36.8A (147.20%), 3.293V
5VSB OCP (29.7°C / 44.2°C)	5A (166.67%), 5.225V	4.6A (153.33%), 5.224V
OPP (31.07°C / 44.91°C)	134.17%	131.70%

Hold-Up Time & PWR_OK Signal

Hold-Up Time (ms)	24.1
AC Loss to PWR_OK Hold Up Time (ms)	20.7
PWR_OK Inactive to DC Loss Delay (ms)	3.4

Stromverbrauch im Ruhezustand

Tables

115V

Detailed Results						
	Average	Min	Limit Min	Max	Limit Max	Result
Mains Voltage RMS:	115.08 V	115.04 V	113.85 V	115.13 V	116.15 V	PASS
Mains Frequency:	60.00 Hz	59.99 Hz	59.40 Hz	60.01 Hz	60.60 Hz	PASS
Mains Voltage CF:	1.416	1.415	1.340	1.418	1.490	PASS
Mains Voltage THD:	0.13 %	0.09 %	N/A	0.17 %	2.00 %	PASS
Real Power:	0.035 W	0.001 W	N/A	0.070 W	N/A	N/A
Apparent Power:	10.650 W	10.342 W	N/A	10.974 W	N/A	N/A
Power Factor:	0.003	N/A	N/A	N/A	N/A	N/A

230V

Detailed Results						
	Average	Min	Limit Min	Max	Limit Max	Result
Mains Voltage RMS:	231.03 V	230.94 V	227.70 V	231.10 V	232.30 V	PASS
Mains Frequency:	50.00 Hz	49.99 Hz	49.50 Hz	50.01 Hz	50.50 Hz	PASS
Mains Voltage CF:	1.417	1.417	1.340	1.419	1.490	PASS
Mains Voltage THD:	0.17 %	0.14 %	N/A	0.27 %	2.00 %	PASS
Real Power:	0.098 W	0.054 W	N/A	0.215 W	N/A	N/A
Apparent Power:	35.589 W	34.958 W	N/A	36.273 W	N/A	N/A
Power Factor:	0.003	N/A	N/A	N/A	N/A	N/A

Efficiency Graph

115V

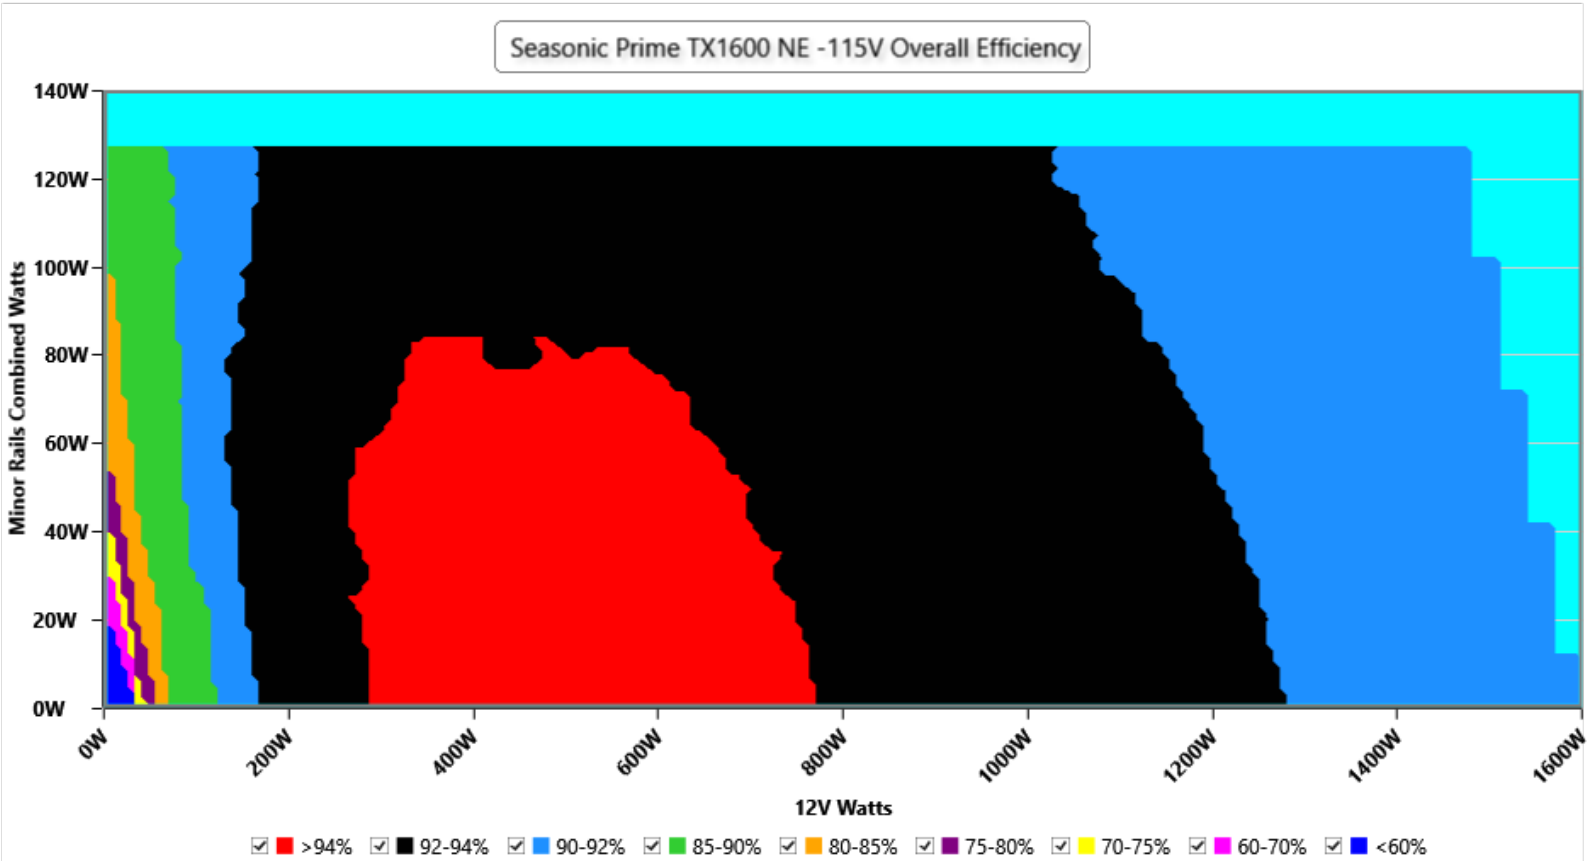

INFO

This graph depicts the PSU`s efficiency throughout its entire operational range. For the generation of the efficiency and noise graphs we set our loaders to auto mode through our custom-made software before trying thousands of possible load combinations

230V

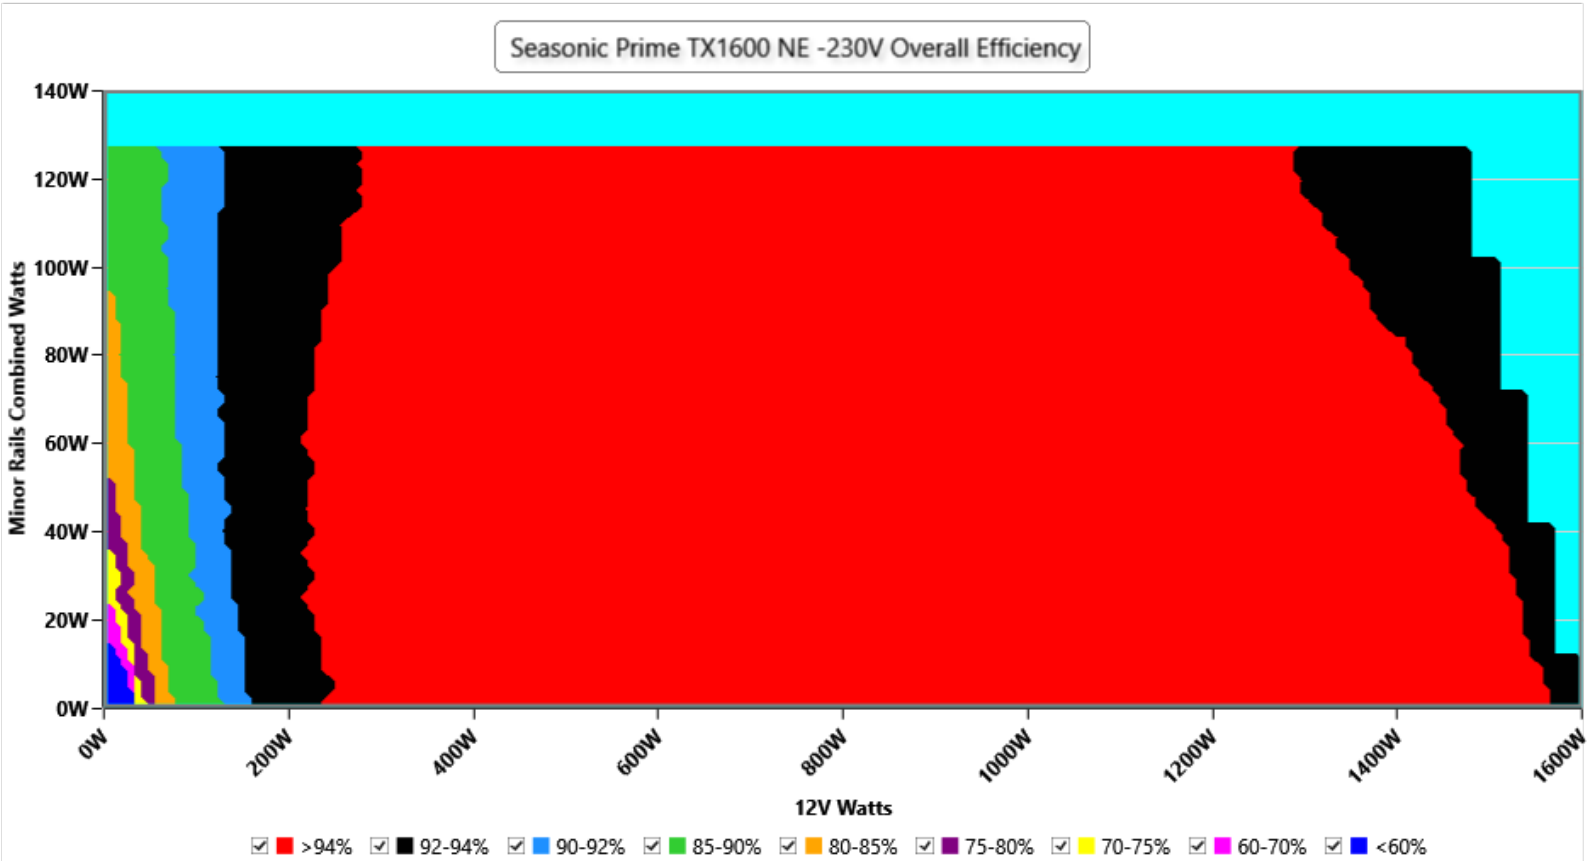

INFO

This graph depicts the PSU`s efficiency throughout its entire operational range. For the generation of the efficiency and noise graphs we set our loaders to auto mode through our custom-made software before trying thousands of possible load combinations

Noise Graph

115V

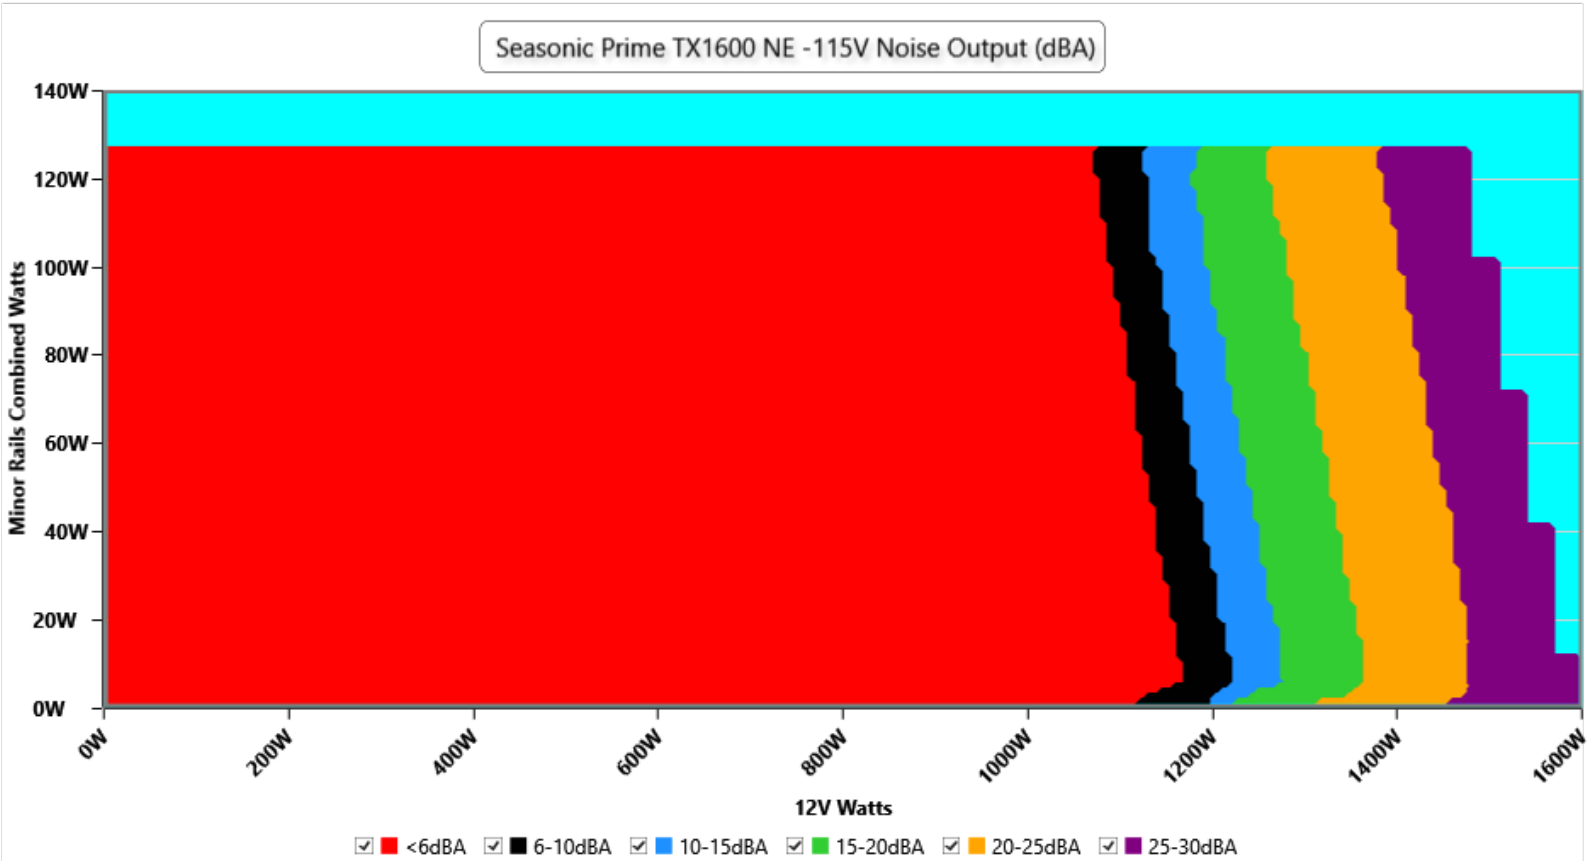

INFO

The PSU`s noise in its entire operational range and under 30-32 °C ambient is depicted in this graph. The X axis represents the load on the +12V rail(s) while the Y axis is the load on the minor rails

230V

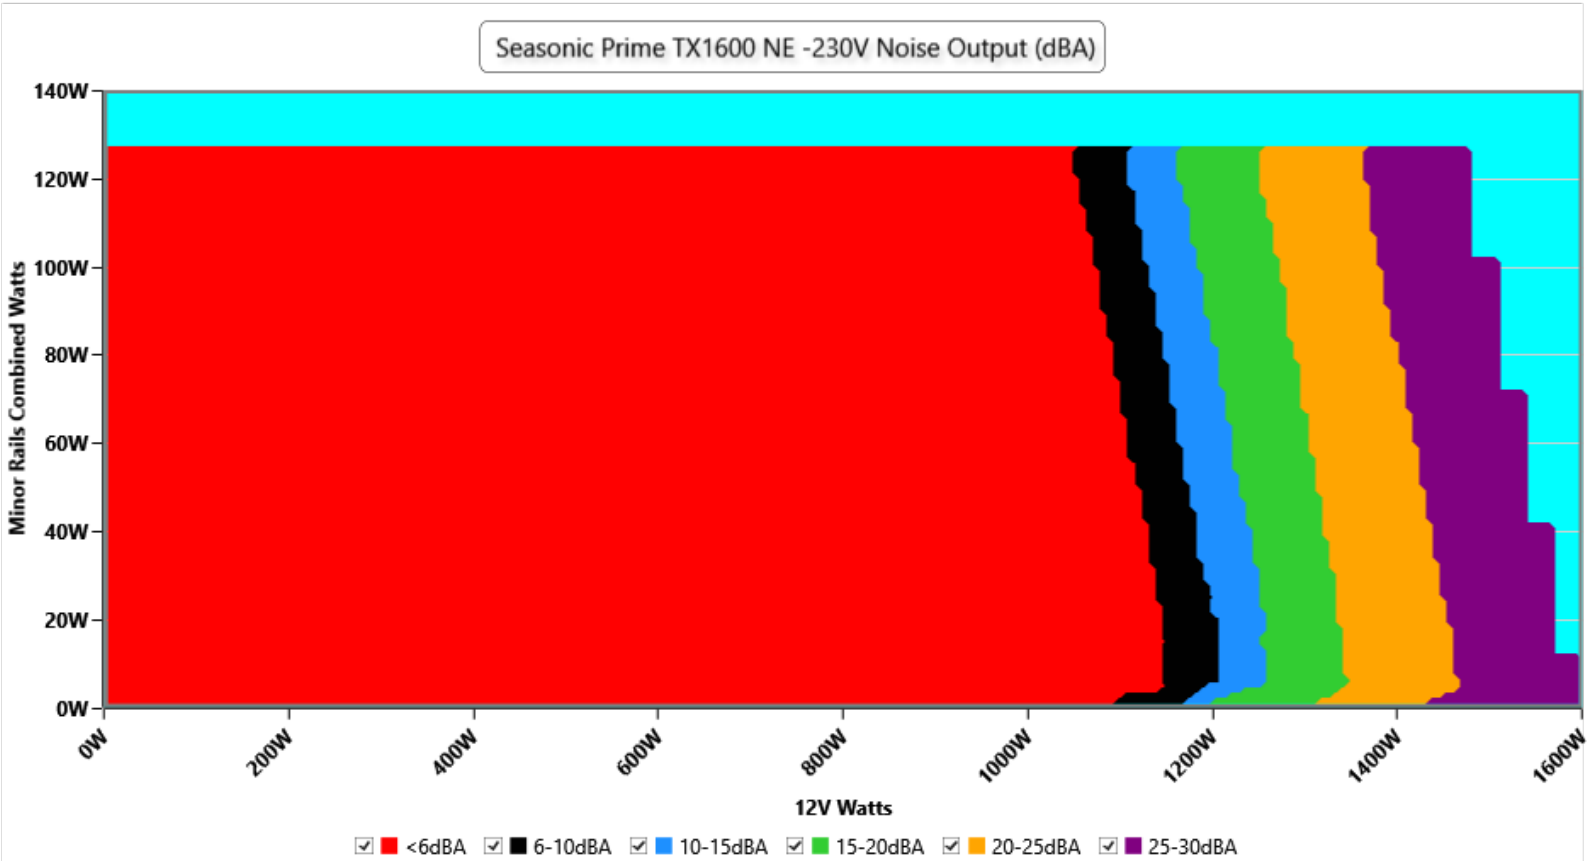

INFO

The PSU`s noise in its entire operational range and under 30-32 °C ambient is depicted in this graph. The X axis represents the load on the +12V rail(s) while the Y axis is the load on the minor rails

Indicative Performance

Efficiency under high ambient temperature

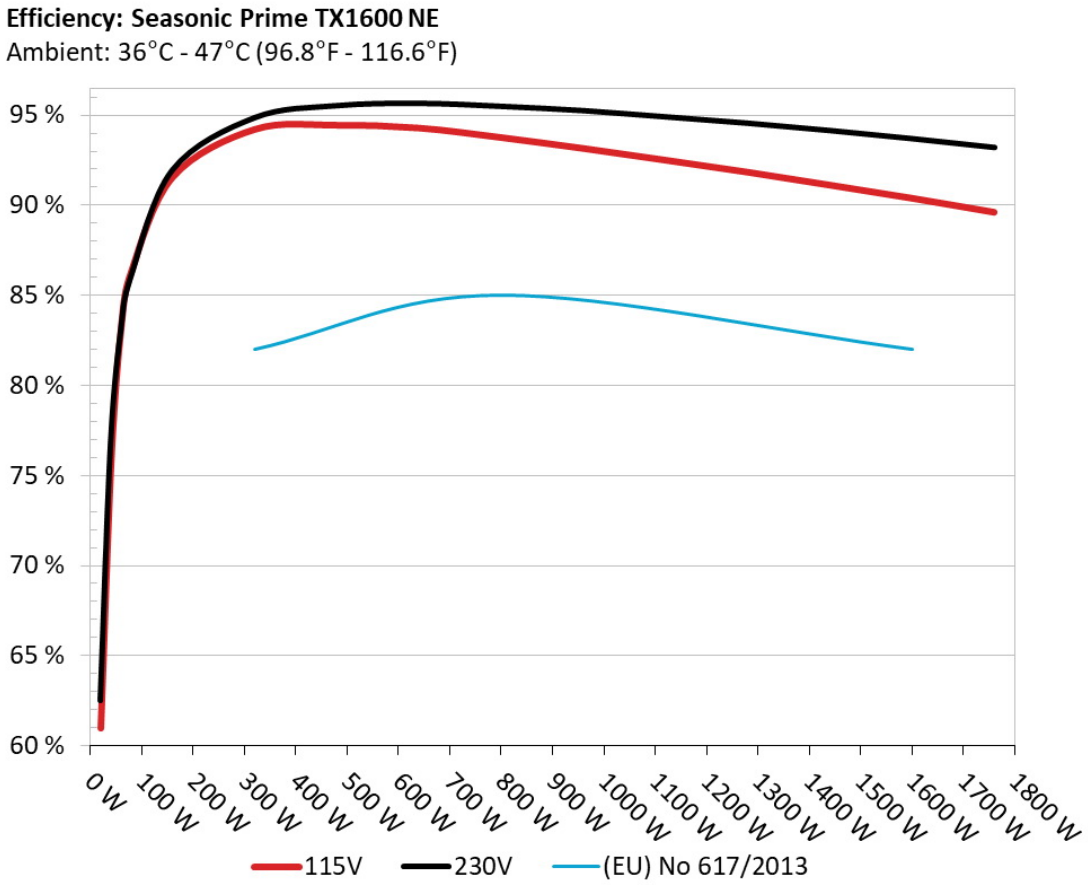

INFO

The PSU`s efficiency under high ambient temperatures with 115V and 230V input. For this graph the results of the 10-110% load regulation table are used

5VSB Efficiency

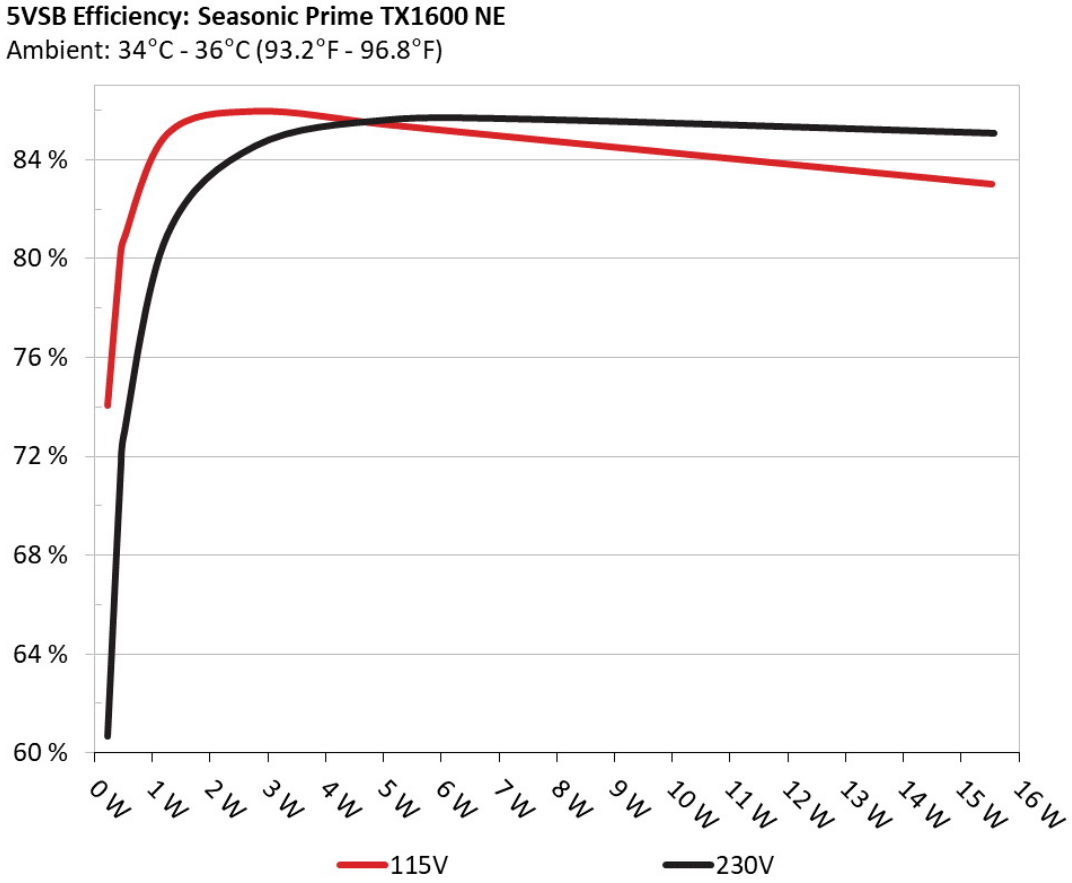

INFO

This graph depicts the efficiency levels of the 5VSB rail with 115V and 230V input

5VSB Efficiency (ERP LOT 3/6 & CEC)

115V

Test #	5VSB	DC/AC (Watts)	Efficiency	PF/AC Volts
1	**0.045A**	0.227W	74.071%	0.031
	5.043V	0.307W		115.17V
2	**0.09A**	0.454W	80.246%	0.056
	5.043V	0.566W		115.17V
3	**0.55A**	2.784W	85.982%	0.26
	5.06V	3.238W		115.17V
4	**1A**	5.088W	85.434%	0.372
	5.087V	5.956W		115.17V
5	**1.5A**	7.68W	84.83%	0.438
	5.118V	9.053W		115.17V
6	**3A**	15.54W	83.032%	0.527
	5.18V	18.716W		115.16V

230V

Test #	5VSB	DC/AC (Watts)	Efficiency	PF/AC Volts
1	**0.045A**	0.227W	60.677%	0.011
	5.047V	0.374W		230.4V
2	**0.09A**	0.454W	71.504%	0.019
	5.044V	0.635W		230.4V
3	**0.55A**	2.784W	84.576%	0.095
	5.06V	3.292W		230.4V
4	**1A**	5.09W	85.635%	0.162
	5.088V	5.944W		230.4V
5	**1.5A**	7.678W	85.648%	0.225
	5.117V	8.965W		230.4V
6	**3.001A**	15.569W	85.088%	0.347
	5.189V	18.298W		230.4V

Protection Features

OCP (Normal @ 29.7°C)	12V: 177.20A (132.90%), 12.012V 5V: 34.6A (138.40%), 4.984V 3.3V: 36.7A (146.80%), 3.293V 5VSB: 5A (166.67%), 5.225V
OCP (Hot) @ 44.2°C)	12V: 176.20A (132.15%), 12.003V 5V: 34.5A (138.00%), 4.977V 3.3V: 36.8A (147.20%), 3.293V 5VSB: 4.6A (153.33%), 5.224V
OPP (Normal @ 31.1°C)	2146.67W (134.17%)
OPP (Hot @ 44.9°C)	2107.23W (131.70%)
OTP	✓ (115°C @ Heat Sink)
SCP	12V to Earth: ✓ 5V to Earth: ✓ 3.3V to Earth: ✓ 5VSB to Earth: ✓ -12V to Earth: ✓
PWR_OK	Proper Operation
NLO	✓
Fan Failure Protection	✓
SIP	Surge: MOV Inrush: NTC & Bypass Relay

Supplementary Tests (For Reference)

Typical Load Tests

115V

Test	12V	5V	3.3V	5VSB	DC/AC (Watts)	Efficiency	Fan Speed (RPM)	PSU Noise (dB[A])	Temps (In/Out)	PF/AC Volts
10%	**11.516A**	**1.977A**	**1.985A**	**0.983A**	160.025	91.575%	0	<6.0	50.67°C	0.979
	12.020V	5.059V	3.324V	5.089V	174.753				40.02°C	115.12V

Test	12V	5V	3.3V	5VSB	DC/AC (Watts)	Efficiency	Fan Speed (RPM)	PSU Noise (dB[A])	Temps (In/Out)	PF/AC Volts
20%	**24.055A**	**2.968A**	**2.982A**	**1.18A**	320.001	94.218%	0	<6.0	50.11°C	0.986
	12.018V	5.056V	3.32V	5.088V	339.63				40.93°C	115.08V
30%	**36.894A**	**3.464A**	**3.483A**	**1.375A**	479.382	94.449%	0	<6.0	49.5°C	0.987
	12.016V	5.053V	3.316V	5.092V	507.56				41.08°C	115.04V
40%	**49.822A**	**3.961A**	**3.985A**	**1.574A**	639.801	94.293%	0	<6.0	49.69°C	0.99
	12.015V	5.051V	3.313V	5.085V	678.521				41.97°C	115V
50%	**62.356A**	**4.954A**	**4.988A**	**1.77A**	799.562	93.766%	523	<6.0	42.32°C	0.993
	12.012V	5.048V	3.309V	5.087V	852.729				49.97°C	114.97V
60%	**74.959A**	**5.948A**	**5.993A**	**1.967A**	960.071	93.16%	523	<6.0	42.79°C	0.995
	12.010V	5.045V	3.305V	5.085V	1030.583				51.84°C	114.95V
70%	**87.501A**	**6.944A**	**7.001A**	**2.165A**	1119.885	92.511%	619	<6.0	43.27°C	0.995
	12.009V	5.042V	3.3V	5.082V	1210.547				53.92°C	114.91V
80%	**100.124A**	**7.939A**	**8.01A**	**2.266A**	1280.011	91.846%	939	13.5	43.6°C	0.996
	12.006V	5.039V	3.296V	5.076V	1393.647				55.31°C	114.88V
90%	**113.077A**	**8.44A**	**8.506A**	**2.367A**	1439.87	91.128%	1217	22.3	44.45°C	0.996
	12.004V	5.037V	3.292V	5.071V	1580.048				56.45°C	114.85V
100%	**125.836A**	**8.942A**	**9.034A**	**2.952A**	1599.932	90.401%	1438	27.1	45.45°C	0.996
	12.001V	5.034V	3.288V	5.082V	1769.817				57.91°C	114.8V
110%	**138.519A**	**9.94A**	**10.142A**	**2.958A**	1760.546	89.621%	2178	38.3	46.7°C	0.997
	12.000V	5.031V	3.283V	5.073V	1964.449				58.41°C	114.76V
CL1	**0.118A**	**14.931A**	**14.96A**	**0A**	126.328	86.393%	520	<6.0	40.59°C	0.975
	12.003V	5.044V	3.315V	5.035V	146.213				55.86°C	115.15V
CL2	**0.117A**	**24.819A**	**0A**	**0A**	126.408	84.877%	514	<6.0	40.15°C	0.975
	12.008V	5.037V	3.33V	5.04V	148.937				55.58°C	115.14V
CL3	**0.117A**	**0A**	**24.931A**	**0A**	83.897	78.643%	517	<6.0	40.1°C	0.967
	11.996V	5.057V	3.309V	5.037V	106.685				53.8°C	115.15V
CL4	**133.287A**	**0A**	**0A**	**0A**	1600.16	90.844%	1436	27.1	45.76°C	0.996
	12.005V	5.048V	3.299V	4.975V	1761.452				55.68°C	114.79V

The results above are not used in the certification process

230V

Test	12V	5V	3.3V	5VSB	DC/AC (Watts)	Efficiency	Fan Speed (RPM)	PSU Noise (dB[A])	Temps (In/Out)	PF/AC Volts
10%	**11.518A**	**1.977A**	**1.986A**	**0.983A**	160.031	91.94%	0	<6.0	46.85°C	0.89
	12.019V	5.059V	3.324V	5.088V	174.058				40.12°C	230.37V
20%	**24.059A**	**2.968A**	**2.982A**	**1.18A**	320.011	94.846%	0	<6.0	48.04°C	0.941
	12.016V	5.056V	3.32V	5.085V	337.398				40.65°C	230.36V
30%	**36.901A**	**3.464A**	**3.483A**	**1.375A**	479.423	95.516%	0	<6.0	48.19°C	0.956
	12.015V	5.053V	3.316V	5.091V	501.928				41.1°C	230.33V
40%	**49.829A**	**3.961A**	**3.985A**	**1.574A**	639.834	95.646%	0	<6.0	49.65°C	0.963
	12.014V	5.051V	3.312V	5.084V	668.956				41.86°C	230.31V
50%	**62.370A**	**4.954A**	**4.988A**	**1.77A**	799.633	95.48%	523	<6.0	42.25°C	0.969
	12.011V	5.048V	3.308V	5.087V	837.494				46.63°C	230.3V
60%	**74.979A**	**5.949A**	**5.994A**	**1.967A**	960.175	95.241%	523	<6.0	42.89°C	0.974
	12.009V	5.045V	3.304V	5.085V	1008.168				47.6°C	230.29V
70%	**87.518A**	**6.944A**	**7.002A**	**2.165A**	1119.921	94.897%	665	<6.0	43.1°C	0.97
	12.007V	5.043V	3.3V	5.082V	1180.144				48.54°C	230.28V
80%	**100.129A**	**7.938A**	**8.01A**	**2.266A**	1279.968	94.546%	960	14.4	43.88°C	0.975
	12.005V	5.04V	3.296V	5.077V	1353.797				49.46°C	230.26V
90%	**113.071A**	**8.438A**	**8.506A**	**2.366A**	1439.764	94.139%	1246	22.8	44.6°C	0.979
	12.003V	5.038V	3.292V	5.073V	1529.411				50.43°C	230.24V
100%	**125.824A**	**8.939A**	**9.033A**	**2.95A**	1599.805	93.69%	1438	27.1	45.68°C	0.982
	12.002V	5.035V	3.288V	5.086V	1707.545				51.79°C	230.22V
110%	**138.516A**	**9.938A**	**10.141A**	**2.956A**	1760.468	93.2%	2096	37.3	46.59°C	0.984
	11.999V	5.032V	3.283V	5.076V	1888.905				52.9°C	230.2V
CL1	**0.118A**	**14.929A**	**14.96A**	**0A**	126.324	86.347%	519	<6.0	40.92°C	0.858
	12.001V	5.044V	3.316V	5.035V	146.293				50.5°C	230.39V
CL2	**0.117A**	**24.817A**	**0A**	**0A**	126.409	84.83%	512	<6.0	40.53°C	0.861
	12.006V	5.037V	3.33V	5.04V	149.009				49.59°C	230.39V
CL3	**0.117A**	**0A**	**24.93A**	**0A**	83.899	78.758%	518	<6.0	40.6°C	0.812
	11.996V	5.058V	3.309V	5.037V	106.53				48.84°C	230.4V

Test	12V	5V	3.3V	5VSB	DC/AC (Watts)	Efficiency	Fan Speed (RPM)	PSU Noise (dB[A])	Temps (In/Out)	PF/AC Volts
CL4	**133.299A**	**0A**	**0A**	**0A**	1600.205	94.007%	1437	27.1	45.33°C	0.982
	12.005V	5.049V	3.299V	4.975V	1702.214				50.79°C	230.22V

The results above are not used in the certification process

Light Load Tests

115V

Test	12V	5V	3.3V	5VSB	DC/AC (Watts)	Efficiency	Fan Speed (RPM)	PSU Noise (dB[A])	Temps (In/Out)	PF/AC Volts
20W	**1.220A**	**0.493A**	**0.495A**	**0.198A**	20.005	60.995%	0	<6.0	41.88°C	0.867
	12.171V	5.068V	3.332V	5.055V	32.796				36.55°C	115.17V
40W	**2.716A**	**0.691A**	**0.694A**	**0.297A**	40.003	75.725%	0	<6.0	41.8°C	0.931
	12.038V	5.065V	3.33V	5.057V	52.828				37.27°C	115.16V
60W	**4.206A**	**0.889A**	**0.893A**	**0.395A**	60.002	83.34%	0	<6.0	44.28°C	0.948
	12.012V	5.063V	3.328V	5.062V	71.996				38.58°C	115.15V
80W	**5.688A**	**1.087A**	**1.091A**	**0.494A**	79.964	86.364%	0	<6.0	46.48°C	0.963
	12.011V	5.061V	3.327V	5.067V	92.587				39.12°C	115.14V

The results above are not used in the certification process

230V

Test	12V	5V	3.3V	5VSB	DC/AC (Watts)	Efficiency	Fan Speed (RPM)	PSU Noise (dB[A])	Temps (In/Out)	PF/AC Volts
20W	**1.220A**	**0.493A**	**0.495A**	**0.198A**	20.008	62.517%	0	<6.0	40.41°C	0.525
	12.172V	5.069V	3.331V	5.058V	32.071				36.62°C	230.4V
40W	**2.716A**	**0.691A**	**0.694A**	**0.297A**	40.005	76.824%	0	<6.0	40.61°C	0.649
	12.039V	5.065V	3.329V	5.058V	52.071				37.24°C	230.4V
60W	**4.208A**	**0.889A**	**0.893A**	**0.395A**	60.003	83.134%	0	<6.0	43.08°C	0.751
	12.010V	5.063V	3.327V	5.063V	72.181				38.08°C	230.39V
80W	**5.690A**	**1.087A**	**1.091A**	**0.494A**	79.969	86.086%	0	<6.0	45.08°C	0.798
	12.010V	5.061V	3.327V	5.067V	92.902				39.31°C	230.39V

The results above are not used in the certification process

Ripple Measurements

115V

Test	12V	5V	3.3V	5VSB	Pass/Fail
10% Load	11.4 mV	6.2 mV	4.5 mV	27.0 mV	Pass
20% Load	9.0 mV	6.3 mV	4.4 mV	28.9 mV	Pass
30% Load	8.7 mV	5.7 mV	4.3 mV	27.2 mV	Pass
40% Load	9.3 mV	6.2 mV	4.2 mV	19.9 mV	Pass
50% Load	9.7 mV	6.1 mV	4.8 mV	17.4 mV	Pass
60% Load	9.2 mV	6.9 mV	5.1 mV	19.6 mV	Pass
70% Load	9.4 mV	7.6 mV	5.8 mV	20.3 mV	Pass
80% Load	9.6 mV	7.6 mV	9.7 mV	23.2 mV	Pass
90% Load	10.4 mV	7.5 mV	10.5 mV	23.1 mV	Pass
100% Load	16.8 mV	7.9 mV	10.6 mV	33.0 mV	Pass
110% Load	15.9 mV	7.5 mV	11.0 mV	27.2 mV	Pass
Crossload 1	17.7 mV	6.8 mV	11.6 mV	7.6 mV	Pass
Crossload 2	12.8 mV	7.9 mV	6.5 mV	6.7 mV	Pass
Crossload 3	7.2 mV	8.1 mV	15.3 mV	7.0 mV	Pass
Crossload 4	16.4 mV	7.7 mV	5.7 mV	9.6 mV	Pass

The results above are not used in the certification process

230V

Test	12V	5V	3.3V	5VSB	Pass/Fail
10% Load	15.1 mV	6.7 mV	4.6 mV	27.9 mV	Pass
20% Load	11.1 mV	6.3 mV	4.3 mV	27.4 mV	Pass
30% Load	9.6 mV	6.1 mV	4.3 mV	27.3 mV	Pass
40% Load	9.9 mV	6.1 mV	4.2 mV	18.7 mV	Pass
50% Load	9.8 mV	6.2 mV	4.4 mV	24.2 mV	Pass
60% Load	9.6 mV	7.5 mV	5.2 mV	20.2 mV	Pass

Test	12V	5V	3.3V	5VSB	Pass/Fail
70% Load	10.3 mV	7.5 mV	5.9 mV	20.7 mV	Pass
80% Load	9.7 mV	7.7 mV	10.1 mV	24.9 mV	Pass
90% Load	10.4 mV	8.1 mV	10.5 mV	24.8 mV	Pass
100% Load	17.1 mV	8.2 mV	10.9 mV	32.7 mV	Pass
110% Load	18.1 mV	8.2 mV	11.1 mV	26.0 mV	Pass
Crossload 1	20.8 mV	6.8 mV	11.2 mV	7.6 mV	Pass
Crossload 2	17.1 mV	8.6 mV	6.4 mV	6.9 mV	Pass
Crossload 3	9.7 mV	9.0 mV	15.4 mV	7.4 mV	Pass
Crossload 4	16.8 mV	7.5 mV	5.9 mV	9.9 mV	Pass

The results above are not used in the certification process

Seasonic Prime Noctua Edition TX-1600

Top side

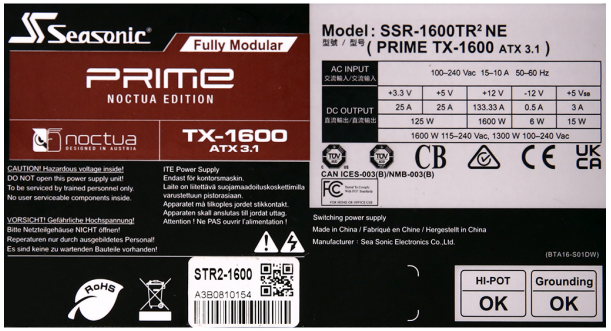

Power specifications label

Cybenetics bietet freiwillige Zertifizierungsprogramme für Netzteile – ETA für Effizienz, LAMBDA für Lautstärke und SAFE für Sicherheit und korrekten Betrieb – sowie für Kühlprodukte mit DELTA für die Schalldämmung von Gehäusen und PHI für Luftstrom und statischen Druck von Lüftern

CYBENETICS LTD Syrou 6, Latsia, 2231, Nicosia Cyprus

www.cybenetics.com - info@cybenetics.com