



## Seasonic Focus GX-750 ATX3 (ATX v3.1)


Serial Number -

Lab ID SS75002749

Certification ID 252749

Test Result Report ID: 25PS2749A

Certificate Issue Date: Feb 20, 2025

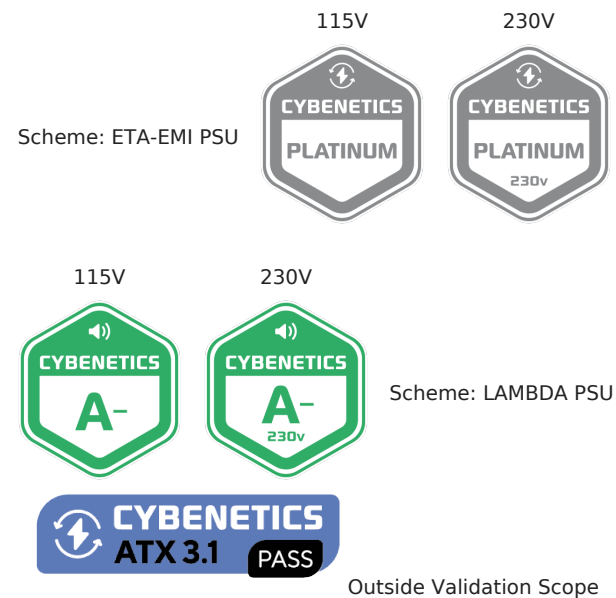

## General Information

### Test Equipment

|                       |                                                                                     |
|-----------------------|-------------------------------------------------------------------------------------|
| Electronic Loads      | Chroma 63601-5 x2<br>Chroma 63600-2<br>Chroma 63640-80-80 x10<br>Chroma 63610-80-20 |
| AC Sources            | Chroma 6530, APM SP300VAC4000W-P, GW Instek ASR-3500                                |
| Power Analyzers       | Rohde & Schwarz HMC8015 & NPA701                                                    |
| Oscilloscopes         | Picoscope 4444, Siglent SDS2104X PLUS                                               |
| Sound Analyzer        | Bruel & Kjaer 2270 G4                                                               |
| Microphone            | Bruel & Kjaer Type 4955-A                                                           |
| Temperature Logger    | Picoscope TC-08                                                                     |
| Tachometer            | UNI-T UT372                                                                         |
| Multimeters           | Keysight 34465A                                                                     |
| EMI Analyzer          | TekBox TBMR-110M-EU                                                                 |
| Isolation Transformer | 4kVA                                                                                |
| UPS                   | FSP Champ Tower 3kVA, CyberPower OLS3000E 3kVA                                      |
| Testing Methodology   | Cybenetics PSU Test Protocol                                                        |

### DUT Information(Non-accredited measurements)

|                                   |                              |
|-----------------------------------|------------------------------|
| Product Identification Details    |                              |
| Brand                             | Seasonic                     |
| Model                             | Focus GX-750 ATX3 (ATX v3.1) |
| OEM/ODM                           | Seasonic                     |
| Serial Number                     | -                            |
| Product Specifications            |                              |
| Manufacturer-Provided Information |                              |
| Rated Voltage (Vrms)              | 100-240                      |
| Rated Current (Arms)              | 5-10                         |

|                                                   |                                                                                     |
|---------------------------------------------------|-------------------------------------------------------------------------------------|
| Rated Frequency (Hz)                              | 50-60                                                                               |
| Rated Power (W)                                   | 750                                                                                 |
| Operating Temperature (Continuous Full Load) (°C) |                                                                                     |
| Type                                              | ATX12V                                                                              |
| Cable Design                                      | Fully Modular                                                                       |
| Warranty                                          | -                                                                                   |
| Cybenetics Measurements                           |                                                                                     |
| Dimensions (W x H x D)                            |                                                                                     |
| Weight                                            |                                                                                     |
| Cooling                                           | 135mm Fluid Dynamic Bearing Fan (HA13525H12F-Z)                                     |
| Semi-Passive Operation                            | ✓ (selectable)                                                                      |
| Cybenetics Testing Information                    |                                                                                     |
| Lab ID                                            | SS75002749                                                                          |
| Date of receipt                                   | Feb 11, 2025                                                                        |
| Testing Date                                      | Feb 19, 2025                                                                        |
| Report Issued Date                                | Feb 20, 2025                                                                        |
| Engineer Name                                     | -                                                                                   |
| Authorized By the Laboratory Technical Manager    | Aristeidis Bitziopoulos                                                             |
| Signature                                         |  |

### Cables and Connectors(Non-accredited measurements)

| Modular Cables                  |             |                         |          |                     |
|---------------------------------|-------------|-------------------------|----------|---------------------|
| Description                     | Cable Count | Connector Count (Total) | Gauge    | In Cable Capacitors |
| ATX connector 20+4 pin (610mm)  | 1           | 1                       | 16-18AWG | No                  |
| 4+4 pin EPS12V (750mm)          | 2           | 2                       | 16AWG    | No                  |
| 6+2 pin PCIe (750mm)            | 2           | 2                       | 16-18AWG | No                  |
| 12+4 pin PCIe (700mm) (600W)    | 1           | 1                       | 16-24AWG | No                  |
| SATA (500mm+150mm+150mm+150mm)  | 2           | 8                       | 18AWG    | No                  |
| 4-pin Molex (450mm+120mm+120mm) | 1           | 3                       | 18AWG    | No                  |

### Protection Features(Manufacturer)

|                                |   |
|--------------------------------|---|
| Over Power Protection          | ✓ |
| Over Current (+12V) Protection | ✓ |
| Over Temperature Protection    | ✓ |
| Short Circuit Protection       | ✓ |
| Surge Protection               | ✓ |
| Inrush Current Protection      | ✓ |
| Fan Failure Protection         | ✗ |

### Power Specifications

|                      |       |      |    |     |      |      |
|----------------------|-------|------|----|-----|------|------|
| Rail                 |       | 3.3V | 5V | 12V | 5VSB | -12V |
| Max. Power           | Amps  | 20   | 20 | 62  | 3    | 0.3  |
|                      | Watts | 100  |    | 744 | 15   | 3.6  |
| Total Max. Power (W) |       | 750  |    |     |      |      |

### Parts Description

|                     |                                                                     |
|---------------------|---------------------------------------------------------------------|
| <b>General Data</b> |                                                                     |
| Manufacturer (OEM)  | Seasonic                                                            |
| PCB Type            | Double Sided                                                        |
| <b>Primary Side</b> |                                                                     |
| Transient Filter    | 4x Y caps, 2x X caps, 2x CM chokes, 1x MOV                          |
| Inrush Protection   | 1x NTC Thermistor MF72-5D20 (5 Ohm) & Relay                         |
| Bridge Rectifier(s) | 2x GBU15JL (600V, 15A @ 120°C)                                      |
| APFC MOSFETs        | 2x Alpha & Omega AOB190A60CL (600V, 12A, @ 100°C, Rds(on): 0.190hm) |
| APFC Boost Diode    | 1x Infineon IDK08G65C5 (650V, 8A, @ 145°C)                          |
| Bulk Cap(s)         | 1x Nichicon (400V, 560uF, 2,000h @ 105°C, GG)                       |

|                        |                                                                                                                                                                                                               |
|------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Main Switchers         | 4x GreatPower GPT13N50X                                                                                                                                                                                       |
| APFC Controller        | Champion CM6500UNX                                                                                                                                                                                            |
| Resonant Controller    | Champion CU6901VPA                                                                                                                                                                                            |
| Topology               | Primary side: APFC, Full-Bridge & LLC converter Secondary side: Synchronous Rectification & DC-DC converters                                                                                                  |
| <b>Secondary Side</b>  |                                                                                                                                                                                                               |
| +12V MOSFETs           | 4x Nexperia PSMN1R0-40YLD (40V, 198A @ 100°C, Rds(on): 1.93mOhm)                                                                                                                                              |
| 5V & 3.3V              | DC-DC Converters: 6x Nexperia PSMN4R0-30YLD (30V, 67A @ 100°C, Rds(on): 6.6mOhm) PWM Controller(s): ANPECAPW7159C                                                                                             |
| Filtering Capacitors   | Electrolytic: 4x Nichicon (2-5,000h @ 105°C, HD), 1x Nippon Chemi-Con (1-5,000h @ 105°C, KZE), 4x Rubycon (3-6,000h @ 105°C, YXG) 2x Rubycon (6-10,000h @ 105°C, ZLH) Polymer: 17x Nippon Chemi-Con, 6x FPCAP |
| Supervisor IC          | Weltrend WT7527RA (OVP, UVP, OCP, SCP, PG)                                                                                                                                                                    |
| Fan Controller         | Nuvoton M031FB0AE                                                                                                                                                                                             |
| Fan Model              | Hong Hua HA13525H12F-Z (135mm, 12V, 0.50A, Fluid Dynamic Bearing Fan)                                                                                                                                         |
| <b>5VSB Circuit</b>    |                                                                                                                                                                                                               |
| Low Side Rectifier     | Dongke DK5V45R10S (45V, Rds(on): 10mOhm)                                                                                                                                                                      |
| Standby PWM Controller | Excelliance MOS EM8569C                                                                                                                                                                                       |

## Test Results

### Temperature & Compliance Info

|                                              |                   |
|----------------------------------------------|-------------------|
| Temperature Range (°C /°F)                   | 28-32 / 82.4-89.6 |
| ErP Lot 3/6 Ready                            | ✓                 |
| (EU) No 617/2013 Compliance                  | ✓                 |
| ALPM (Alternative Low Power Mode) compatible | ✓                 |
| ATX v3.1 PSU Power Excursion                 | ✓                 |

## Performance Summary

### 115V

|                                                       |          |
|-------------------------------------------------------|----------|
| Accredited                                            |          |
| Average Efficiency (>1450 load combinations)          | 89.065%  |
| Average Noise Output (>1450 Load Combinations)        | 29.33dBA |
| Average PF (>1450 Load Combinations)                  | 0.983    |
| Efficiency With 10W ( $\leq$ 500W) or 2% (>500W) Load | 70.304%  |
| Standby Power Consumption                             | 0.0550W  |
| Non-Accredited                                        |          |
| 12V Ripple (Full Load)                                | 23.25mV  |
| 5V Ripple (Full Load)                                 | 13.35mV  |
| 3.3V Ripple (Full Load)                               | 11.85mV  |
| 5VSB Ripple (Full Load)                               | 11.42mV  |
| 12V Load Regulation                                   | 1.50%    |
| 5V Load Regulation                                    | 0.28%    |
| 3.3V Load Regulation                                  | 0.51%    |
| 5VSB Load Regulation                                  | 3.92%    |
| Inrush Current                                        | 31.730A  |

### 230V

|                                                       |          |
|-------------------------------------------------------|----------|
| Accredited                                            |          |
| Average Efficiency (>1450 load combinations)          | 91.064%  |
| Average Noise Output (>1450 Load Combinations)        | 29.41dBA |
| Average PF (>1450 Load Combinations)                  | 0.948    |
| Efficiency With 10W ( $\leq$ 500W) or 2% (>500W) Load | 70.752%  |
| Standby Power Consumption                             | 0.1583W  |
| Non-Accredited                                        |          |
| 12V Ripple (Full Load)                                | 23.96mV  |
| 5V Ripple (Full Load)                                 | 13.40mV  |
| 3.3V Ripple (Full Load)                               | 11.60mV  |

|                                  |                           |                           |
|----------------------------------|---------------------------|---------------------------|
| 5VSB Ripple (Full Load)          | 10.53mV                   |                           |
| 12V Load Regulation              | 1.50%                     |                           |
| 5V Load Regulation               | 0.30%                     |                           |
| 3.3V Load Regulation             | 0.51%                     |                           |
| 5VSB Load Regulation             | 3.90%                     |                           |
| Inrush Current                   | 68.780A                   |                           |
| 12V Transient Response (200%)    | 11.52V                    |                           |
| 5V Transient Response (200%)     | 4.931V                    |                           |
| 3.3V Transient Response (200%)   | 3.237V                    |                           |
| 5VSB Transient Response (200%)   | 4.926V                    |                           |
| Hold-Up Time & PWR_OK Signal     | 20.70ms                   |                           |
| AC Loss to PWR_OK Hold Up Time   | 16.40ms                   |                           |
| PWR_OK Inactive to DC Loss Delay | 4.30ms                    |                           |
| PSU Timings: T1 (20% / 100%)     | 66.0ms                    | 71.0ms                    |
| PSU Timings: T3 (20% / 100%)     | 130.0ms                   | 126.0ms                   |
| 12V OCP (28.5°C / 43.5°C)        | 70.00A (112.90%), 12.067V | 70.00A (112.90%), 12.081V |
| 5V OCP (28.5°C / 43.5°C)         | 27.2A (136.00%), 4.998V   | 27.1A (135.50%), 5.001V   |
| 3.3V OCP (28.5°C / 43.5°C)       | 28.6A (143.00%), 3.304V   | 28.7A (143.50%), 3.306V   |
| 5VSB OCP (28.5°C / 43.5°C)       | 6.1A (203.33%), 4.762V    | 6.1A (203.33%), 4.755V    |
| OPP (27.78°C / 42.47°C)          | 114.78%                   | 114.78%                   |

## Hold-Up Time & PWR\_OK Signal

|                                       |      |
|---------------------------------------|------|
| Hold-Up Time (ms)                     | 20.7 |
| AC Loss to PWR_OK Hold Up Time (ms)   | 16.4 |
| PWR_OK Inactive to DC Loss Delay (ms) | 4.3  |

## Stromverbrauch im Ruhezustand

### Tables

#### 115V


| Detailed Results   |          |          |           |          |           |        |
|--------------------|----------|----------|-----------|----------|-----------|--------|
|                    | Average  | Min      | Limit Min | Max      | Limit Max | Result |
| Mains Voltage RMS: | 115.04 V | 115.01 V | 113.85 V  | 115.09 V | 116.15 V  | PASS   |
| Mains Frequency:   | 60.00 Hz | 59.99 Hz | 59.40 Hz  | 60.01 Hz | 60.60 Hz  | PASS   |
| Mains Voltage CF:  | 1.416    | 1.415    | 1.340     | 1.418    | 1.490     | PASS   |
| Mains Voltage THD: | 0.13 %   | 0.09 %   | N/A       | 0.19 %   | 2.00 %    | PASS   |
| Real Power:        | 0.055 W  | 0.005 W  | N/A       | 0.096 W  | N/A       | N/A    |
| Apparent Power:    | 10.823 W | 10.276 W | N/A       | 11.367 W | N/A       | N/A    |
| Power Factor:      | 0.007    | N/A      | N/A       | N/A      | N/A       | N/A    |

#### 230V

| Detailed Results   |          |          |           |          |           |        |
|--------------------|----------|----------|-----------|----------|-----------|--------|
|                    | Average  | Min      | Limit Min | Max      | Limit Max | Result |
| Mains Voltage RMS: | 231.00 V | 230.90 V | 227.70 V  | 231.06 V | 232.30 V  | PASS   |
| Mains Frequency:   | 50.00 Hz | 49.99 Hz | 49.50 Hz  | 50.01 Hz | 50.50 Hz  | PASS   |
| Mains Voltage CF:  | 1.417    | 1.416    | 1.340     | 1.419    | 1.490     | PASS   |
| Mains Voltage THD: | 0.17 %   | 0.14 %   | N/A       | 0.25 %   | 2.00 %    | PASS   |
| Real Power:        | 0.158 W  | 0.110 W  | N/A       | 0.216 W  | N/A       | N/A    |
| Apparent Power:    | 34.132 W | 33.530 W | N/A       | 34.763 W | N/A       | N/A    |
| Power Factor:      | 0.005    | N/A      | N/A       | N/A      | N/A       | N/A    |


## Efficiency Graph

115V

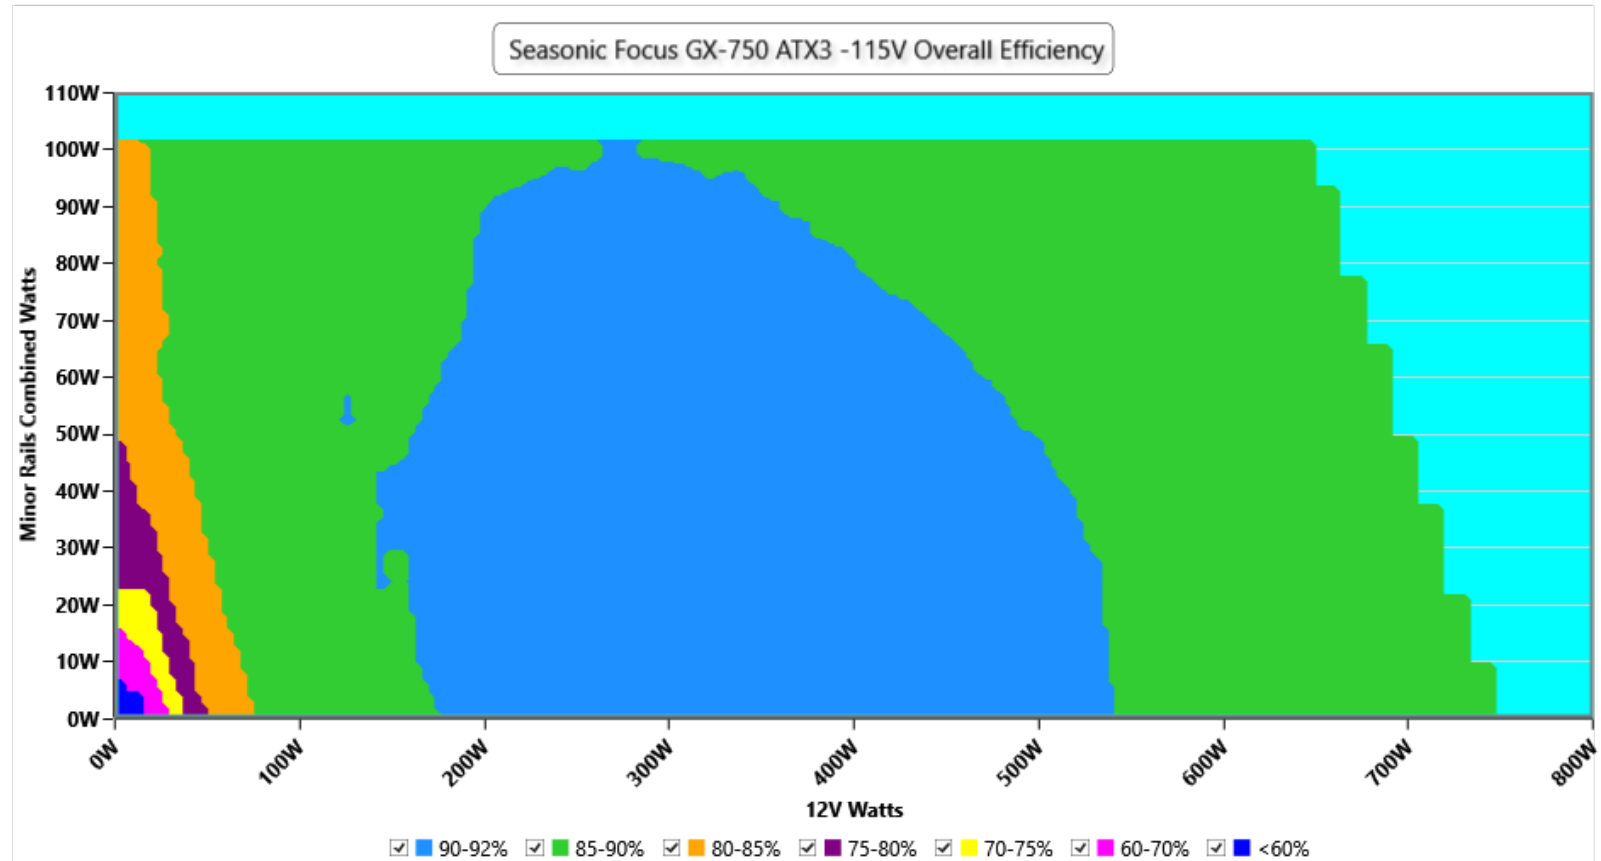

### INFO

This graph depicts the PSU's efficiency throughout its entire operational range. For the generation of the efficiency and noise graphs we set our loaders to auto mode through our custom-made software before trying thousands of possible load combinations

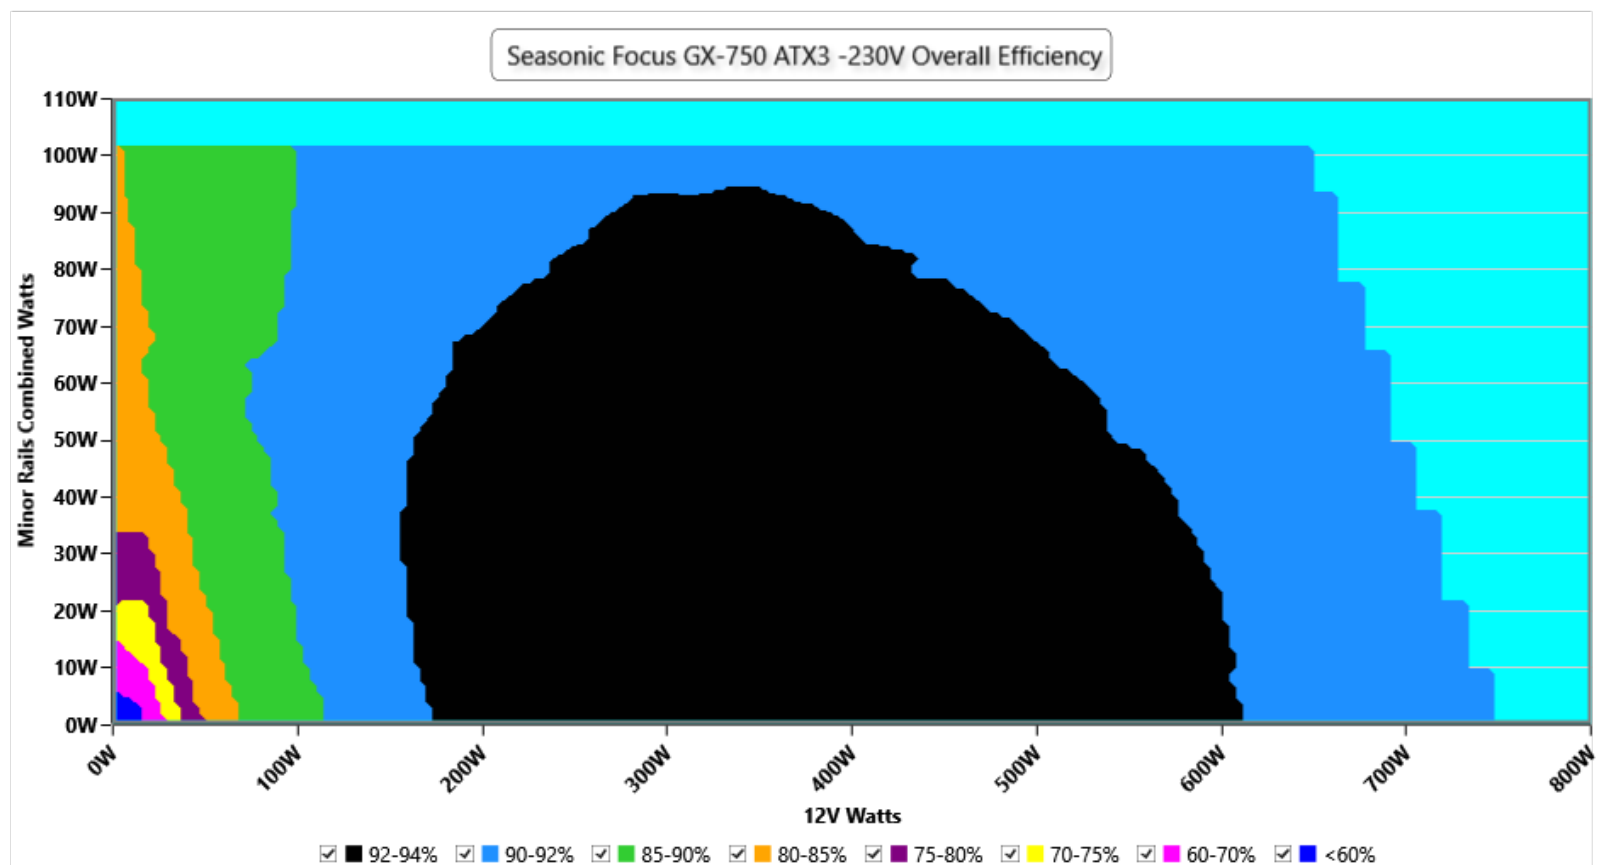


### INFO

This graph depicts the PSU's efficiency throughout its entire operational range. For the generation of the efficiency and noise graphs we set our loaders to auto mode through our custom-made software before trying thousands of possible load combinations


# Noise Graph

115V

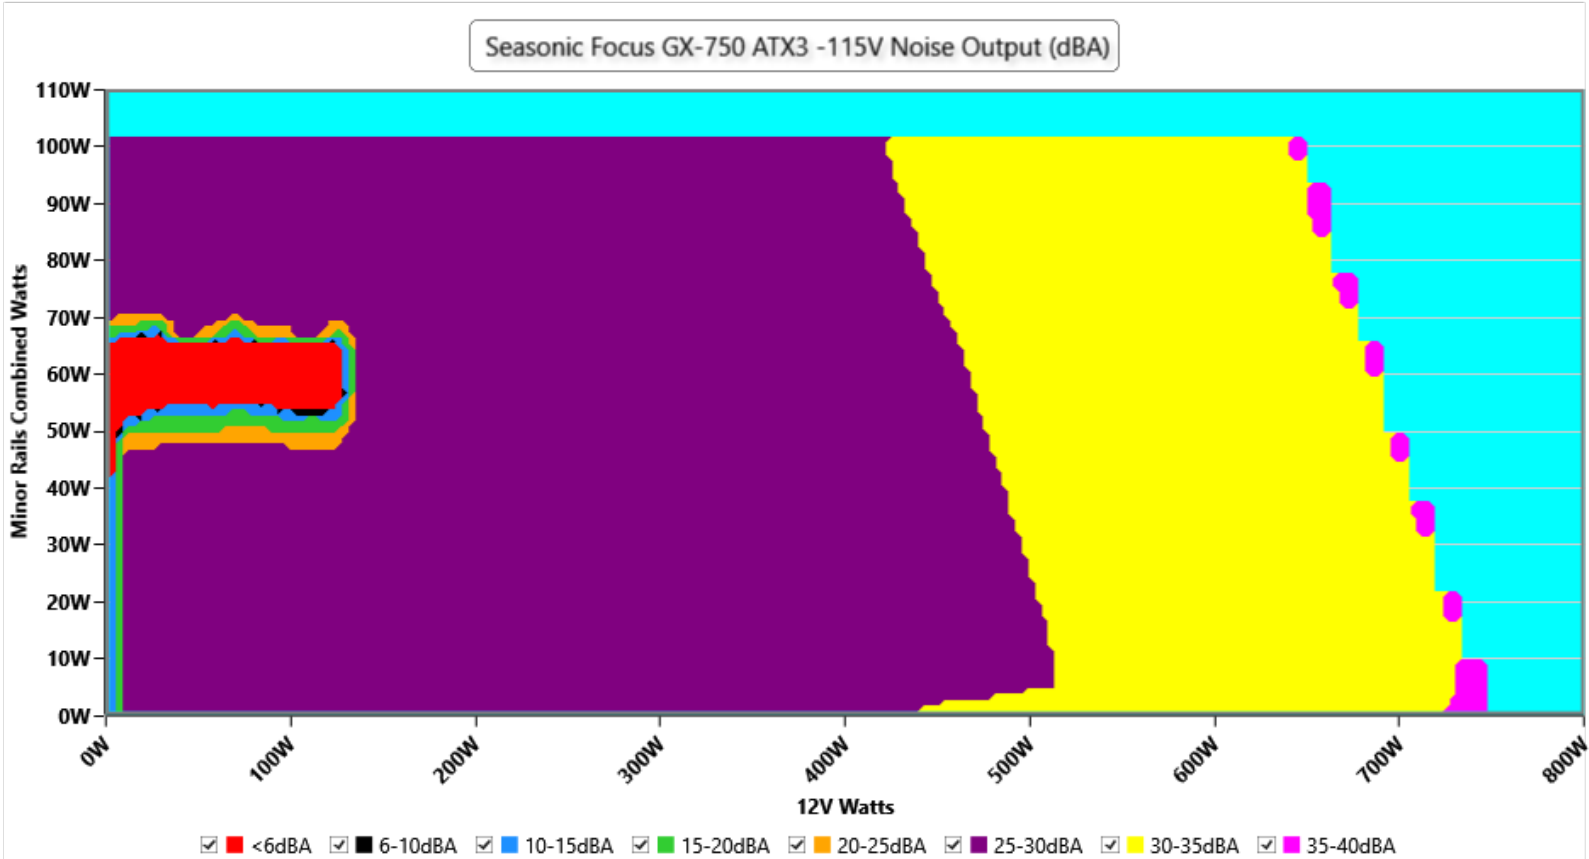

## INFO

The PSU's noise in its entire operational range and under 30-32 °C ambient is depicted in this graph. The X axis represents the load on the +12V rail(s) while the Y axis is the load on the minor rails

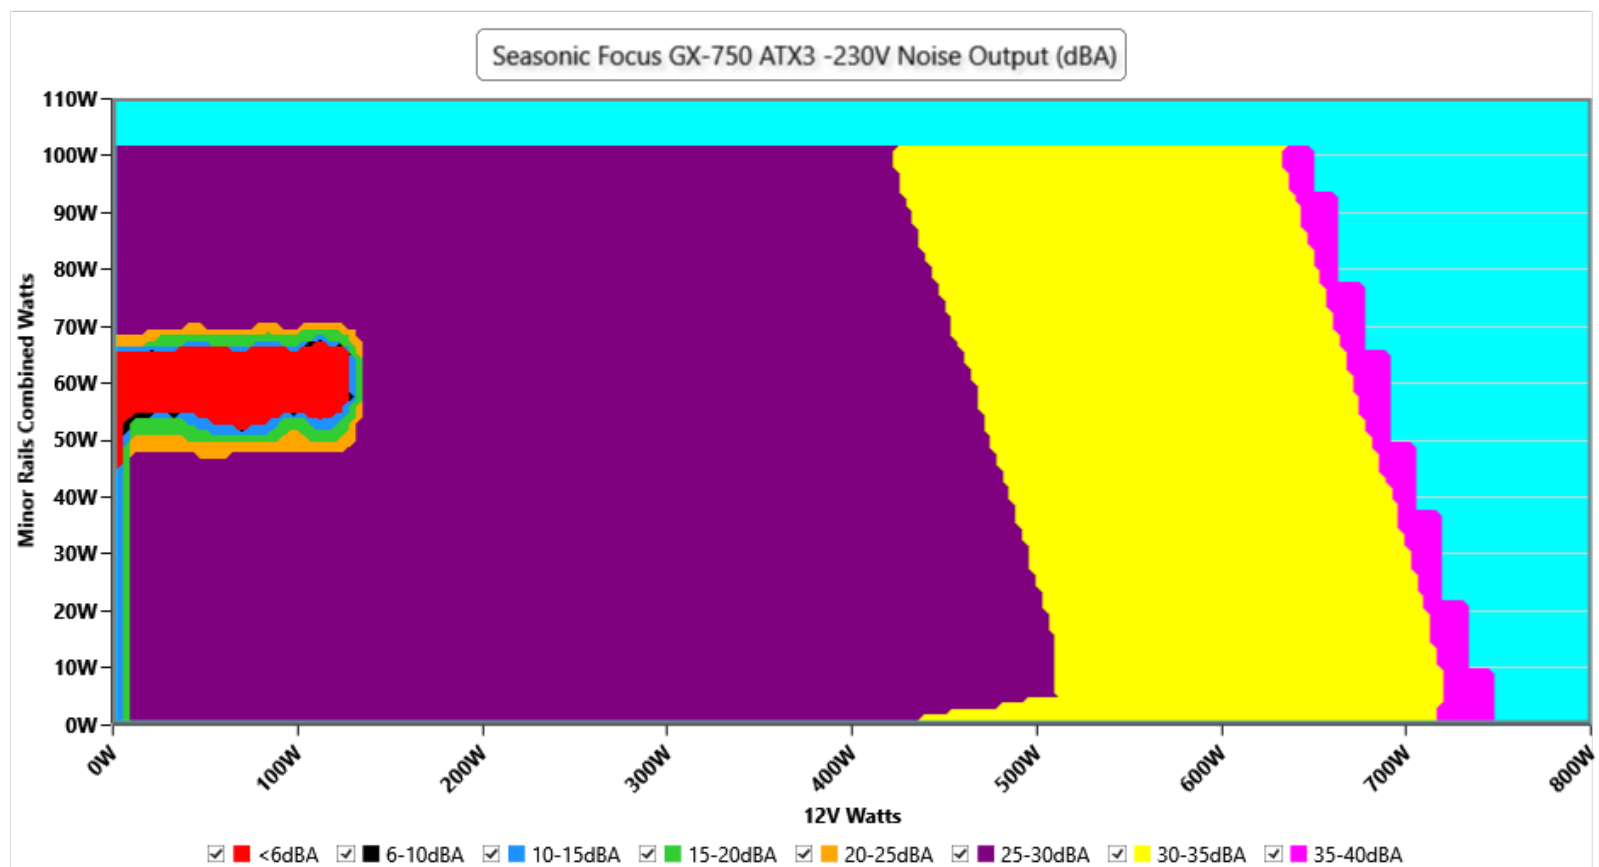

### INFO


The PSU's noise in its entire operational range and under 30-32 °C ambient is depicted in this graph. The X axis represents the load on the +12V rail(s) while the Y axis is the load on the minor rails

## Indicative Performance

### Efficiency under high ambient temperature

#### Efficiency: Seasonic Focus GX-750 ATX3

Ambient: 37°C - 47°C (98.6°F - 116.6°F)

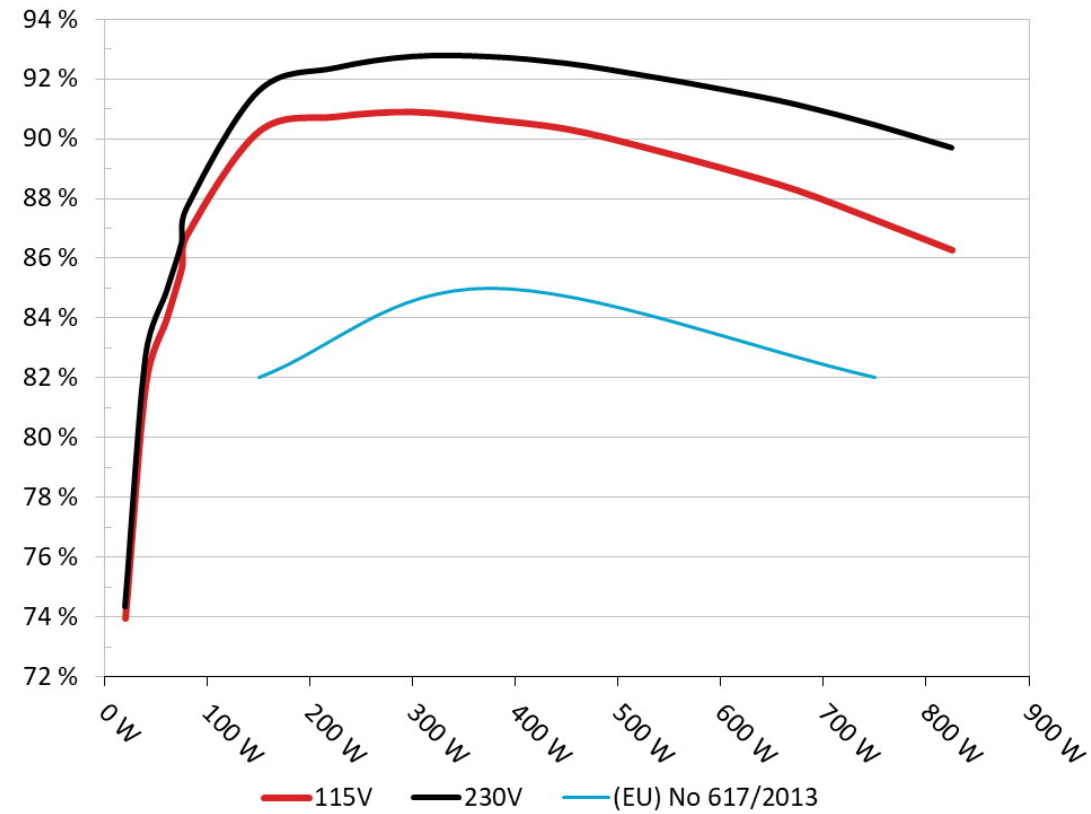


#### INFO

The PSU's efficiency under high ambient temperatures with 115V and 230V input. For this graph the results of the 10-110% load regulation table are used

## 5VSB Efficiency

### 5VSB Efficiency: Seasonic Focus GX-750 ATX3

Ambient: 34°C - 36°C (93.2°F - 96.8°F)

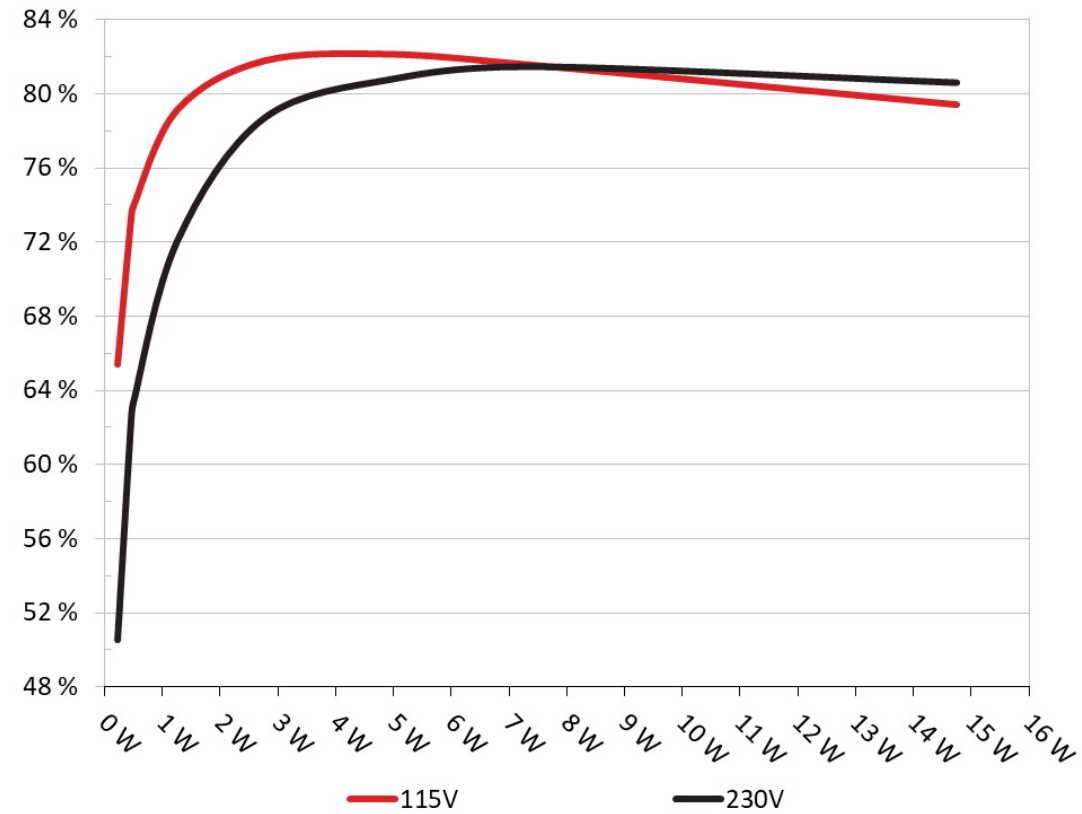

### INFO

This graph depicts the efficiency levels of the 5VSB rail with 115V and 230V input

### 5VSB Efficiency (ERP LOT 3/6 & CEC)

#### 115V

| Test # | 5VSB   | DC/AC (Watts) | Efficiency | PF/AC Volts |
|--------|--------|---------------|------------|-------------|
| 1      | 0.045A | 0.227W        | 65.381%    | 0.036       |
|        | 5.051V | 0.347W        |            | 114.99V     |
| 2      | 0.09A  | 0.455W        | 73.084%    | 0.064       |
|        | 5.049V | 0.623W        |            | 114.98V     |
| 3      | 0.55A  | 2.766W        | 81.758%    | 0.269       |
|        | 5.028V | 3.383W        |            | 114.97V     |
| 4      | 1A     | 5.009W        | 82.108%    | 0.368       |
|        | 5.008V | 6.1W          |            | 114.97V     |
| 5      | 1.5A   | 7.479W        | 81.508%    | 0.421       |
|        | 4.985V | 9.176W        |            | 114.97V     |
| 6      | 3A     | 14.741W       | 79.396%    | 0.494       |
|        | 4.913V | 18.566W       |            | 114.96V     |

#### 230V

| Test # | 5VSB   | DC/AC (Watts) | Efficiency | PF/AC Volts |
|--------|--------|---------------|------------|-------------|
| 1      | 0.045A | 0.227W        | 50.528%    | 0.014       |
|        | 5.051V | 0.45W         |            | 230.13V     |
| 2      | 0.09A  | 0.455W        | 62.107%    | 0.023       |
|        | 5.049V | 0.733W        |            | 230.16V     |
| 3      | 0.55A  | 2.766W        | 78.701%    | 0.105       |
|        | 5.028V | 3.514W        |            | 230.13V     |
| 4      | 1A     | 5.009W        | 80.824%    | 0.172       |
|        | 5.008V | 6.198W        |            | 230.13V     |
| 5      | 1.5A   | 7.48W         | 81.474%    | 0.231       |
|        | 4.986V | 9.183W        |            | 230.13V     |
| 6      | 3A     | 14.751W       | 80.617%    | 0.338       |
|        | 4.917V | 18.298W       |            | 230.12V     |

### Protection Features

|                        |                                                                                                                                |
|------------------------|--------------------------------------------------------------------------------------------------------------------------------|
| OCP (Normal @ 28.5°C)  | 12V: 70.00A (112.90%), 12.067V<br>5V: 27.2A (136.00%), 4.998V<br>3.3V: 28.6A (143.00%), 3.304V<br>5VSB: 6.1A (203.33%), 4.762V |
| OCP (Hot @ 43.5°C)     | 12V: 70.00A (112.90%), 12.081V<br>5V: 27.1A (135.50%), 5.001V<br>3.3V: 28.7A (143.50%), 3.306V<br>5VSB: 6.1A (203.33%), 4.755V |
| OPP (Normal @ 27.8°C)  | 860.88W (114.78%)                                                                                                              |
| OPP (Hot @ 42.5°C)     | 860.83W (114.78%)                                                                                                              |
| OTP                    | ✓ (130°C @ Heat Sink)                                                                                                          |
| SCP                    | 12V to Earth: ✓<br>5V to Earth: ✓<br>3.3V to Earth: ✓<br>5VSB to Earth: ✓<br>-12V to Earth: ✓                                  |
| PWR_OK                 | Proper Operation                                                                                                               |
| NLO                    | ✓                                                                                                                              |
| Fan Failure Protection | ✗                                                                                                                              |
| SIP                    | Surge: MOV<br>Inrush: NTC & Bypass Relay                                                                                       |

### Supplementary Tests (For Reference)

#### Typical Load Tests

115V

| Test | 12V     | 5V     | 3.3V   | 5VSB | DC/AC (Watts) | Efficiency | Fan Speed (RPM) | PSU Noise (dB[A]) | Temps (In/Out) | PF/AC Volts |
|------|---------|--------|--------|------|---------------|------------|-----------------|-------------------|----------------|-------------|
| 10%  | 4.416A  | 1.996A | 1.991A | 1A   | 75.012        | 85.707%    | 0               | <6.0              | 47.57°C        | 0.967       |
|      | 12.094V | 5.012V | 3.316V | 5V   | 87.521        |            |                 |                   | 40.21°C        | 114.94V     |

| Test | 12V     | 5V      | 3.3V    | 5VSB   | DC/AC (Watts) | Efficiency | Fan Speed (RPM) | PSU Noise (dB[A]) | Temps (In/Out) | PF/AC Volts |
|------|---------|---------|---------|--------|---------------|------------|-----------------|-------------------|----------------|-------------|
| 20%  | 9.864A  | 2.994A  | 2.987A  | 1.204A | 149.978       | 90.246%    | 0               | <6.0              | 48.47°C        | 0.979       |
|      | 12.071V | 5.011V  | 3.315V  | 4.985V | 166.188       |            |                 |                   | 40.92°C        | 114.91V     |
| 30%  | 15.660A | 3.495A  | 3.487A  | 1.409A | 224.985       | 90.742%    | 964             | 27.8              | 41.07°C        | 0.983       |
|      | 12.064V | 5.009V  | 3.312V  | 4.971V | 247.936       |            |                 |                   | 48.04°C        | 114.89V     |
| 40%  | 21.460A | 3.996A  | 3.988A  | 1.615A | 300.075       | 90.901%    | 959             | 27.6              | 41.75°C        | 0.985       |
|      | 12.062V | 5.007V  | 3.31V   | 4.956V | 330.11        |            |                 |                   | 48.89°C        | 114.87V     |
| 50%  | 26.876A | 4.996A  | 4.988A  | 1.822A | 374.73        | 90.651%    | 952             | 27.3              | 42.15°C        | 0.984       |
|      | 12.063V | 5.005V  | 3.308V  | 4.941V | 413.37        |            |                 |                   | 50.31°C        | 114.84V     |
| 60%  | 32.313A | 5.997A  | 5.988A  | 2.001A | 449.502       | 90.333%    | 944             | 27                | 42.76°C        | 0.986       |
|      | 12.064V | 5.004V  | 3.307V  | 4.927V | 497.606       |            |                 |                   | 53.29°C        | 114.81V     |
| 70%  | 37.747A | 6.998A  | 6.989A  | 2.241A | 524.55        | 89.725%    | 1018            | 30                | 43.23°C        | 0.987       |
|      | 12.066V | 5.003V  | 3.305V  | 4.909V | 584.624       |            |                 |                   | 55.33°C        | 114.78V     |
| 80%  | 43.245A | 7.999A  | 7.991A  | 2.348A | 599.756       | 89.033%    | 1097            | 31.7              | 43.7°C         | 0.988       |
|      | 12.067V | 5.002V  | 3.304V  | 4.898V | 673.64        |            |                 |                   | 56.7°C         | 114.76V     |
| 90%  | 49.072A | 8.5A    | 8.478A  | 2.456A | 674.785       | 88.272%    | 1171            | 33.8              | 44.56°C        | 0.99        |
|      | 12.069V | 5.001V  | 3.302V  | 4.888V | 764.442       |            |                 |                   | 59.63°C        | 114.75V     |
| 100% | 54.698A | 9.001A  | 8.997A  | 3.093A | 749.996       | 87.291%    | 1550            | 42.1              | 45.87°C        | 0.991       |
|      | 12.071V | 5V      | 3.301V  | 4.851V | 859.188       |            |                 |                   | 60.46°C        | 114.71V     |
| 110% | 60.201A | 10.003A | 10.092A | 3.096A | 825.03        | 86.282%    | 1998            | 49.6              | 46.33°C        | 0.992       |
|      | 12.071V | 4.999V  | 3.299V  | 4.845V | 956.21        |            |                 |                   | 59.77°C        | 114.69V     |
| CL1  | 0.116A  | 12.026A | 11.989A | 0A     | 101.309       | 84.067%    | 970             | 28.1              | 41.17°C        | 0.975       |
|      | 12.098V | 5.006V  | 3.311V  | 5.037V | 120.508       |            |                 |                   | 50.55°C        | 114.95V     |
| CL2  | 0.116A  | 19.981A | 0A      | 0A     | 101.4         | 82.83%     | 968             | 28                | 41.4°C         | 0.975       |
|      | 12.096V | 5.005V  | 3.32V   | 5.041V | 122.418       |            |                 |                   | 48.54°C        | 114.95V     |
| CL3  | 0.115A  | 0A      | 19.948A | 0A     | 67.393        | 76.554%    | 971             | 28.2              | 40.64°C        | 0.968       |
|      | 12.094V | 5.015V  | 3.308V  | 5.039V | 88.037        |            |                 |                   | 47.03°C        | 114.97V     |
| CL4  | 62.134A | 0A      | 0A      | 0A     | 749.772       | 88.095%    | 1504            | 41.1              | 45.28°C        | 0.99        |
|      | 12.067V | 5.009V  | 3.308V  | 5.007V | 851.1         |            |                 |                   | 59.7°C         | 114.72V     |

The results above are not used in the certification process

## 230V

| Test | 12V     | 5V      | 3.3V    | 5VSB   | DC/AC (Watts) | Efficiency | Fan Speed (RPM) | PSU Noise (dB[A]) | Temps (In/Out) | PF/AC Volts |
|------|---------|---------|---------|--------|---------------|------------|-----------------|-------------------|----------------|-------------|
| 10%  | 4.416A  | 1.995A  | 1.99A   | 1A     | 75.003        | 86.52%     | 0               | <6.0              | 46.51°C        | 0.833       |
|      | 12.095V | 5.013V  | 3.317V  | 5.001V | 86.687        |            |                 |                   | 40.35°C        | 230.12V     |
| 20%  | 9.862A  | 2.994A  | 2.987A  | 1.204A | 149.948       | 91.604%    | 0               | <6.0              | 48.16°C        | 0.917       |
|      | 12.071V | 5.011V  | 3.315V  | 4.986V | 163.693       |            |                 |                   | 40.76°C        | 230.11V     |
| 30%  | 15.656A | 3.494A  | 3.487A  | 1.408A | 224.951       | 92.385%    | 966             | 27.9              | 41.2°C         | 0.946       |
|      | 12.065V | 5.01V   | 3.313V  | 4.971V | 243.492       |            |                 |                   | 47.38°C        | 230.08V     |
| 40%  | 21.454A | 3.995A  | 3.987A  | 1.614A | 300.04        | 92.767%    | 960             | 27.7              | 41.68°C        | 0.959       |
|      | 12.065V | 5.008V  | 3.311V  | 4.957V | 323.433       |            |                 |                   | 47.72°C        | 230.06V     |
| 50%  | 26.867A | 4.995A  | 4.987A  | 1.822A | 374.634       | 92.761%    | 953             | 27.3              | 42.42°C        | 0.966       |
|      | 12.064V | 5.006V  | 3.309V  | 4.942V | 403.876       |            |                 |                   | 49.1°C         | 230.05V     |
| 60%  | 32.306A | 5.996A  | 5.988A  | 2.001A | 449.43        | 92.538%    | 946             | 27.1              | 42.91°C        | 0.971       |
|      | 12.065V | 5.005V  | 3.307V  | 4.928V | 485.671       |            |                 |                   | 50.74°C        | 230.04V     |
| 70%  | 37.742A | 6.997A  | 6.989A  | 2.241A | 524.5         | 92.135%    | 1020            | 30                | 43.06°C        | 0.974       |
|      | 12.066V | 5.004V  | 3.306V  | 4.91V  | 569.274       |            |                 |                   | 51.8°C         | 230.04V     |
| 80%  | 43.243A | 7.997A  | 7.991A  | 2.348A | 599.724       | 91.676%    | 1099            | 31.7              | 43.87°C        | 0.977       |
|      | 12.067V | 5.002V  | 3.304V  | 4.899V | 654.179       |            |                 |                   | 53.41°C        | 230.03V     |
| 90%  | 49.070A | 8.499A  | 8.478A  | 2.455A | 674.765       | 91.151%    | 1172            | 33.8              | 44.3°C         | 0.979       |
|      | 12.069V | 5.002V  | 3.302V  | 4.888V | 740.278       |            |                 |                   | 55.03°C        | 230.02V     |
| 100% | 54.702A | 9A      | 8.998A  | 3.092A | 749.994       | 90.477%    | 1561            | 42.4              | 45.85°C        | 0.981       |
|      | 12.070V | 5V      | 3.301V  | 4.852V | 828.936       |            |                 |                   | 55.82°C        | 230.01V     |
| 110% | 60.202A | 10.002A | 10.094A | 3.096A | 825.039       | 89.713%    | 1998            | 49.6              | 46.67°C        | 0.982       |
|      | 12.071V | 4.999V  | 3.299V  | 4.846V | 919.643       |            |                 |                   | 55.69°C        | 229.99V     |
| CL1  | 0.116A  | 12.027A | 11.992A | 0A     | 101.313       | 85.071%    | 971             | 28.2              | 41.97°C        | 0.883       |
|      | 12.098V | 5.006V  | 3.311V  | 5.037V | 119.093       |            |                 |                   | 49.07°C        | 230.1V      |
| CL2  | 0.116A  | 19.981A | 0A      | 0A     | 101.401       | 83.827%    | 969             | 28                | 41.52°C        | 0.884       |
|      | 12.096V | 5.005V  | 3.32V   | 5.04V  | 120.966       |            |                 |                   | 48.06°C        | 230.1V      |
| CL3  | 0.116A  | 0A      | 19.952A | 0A     | 67.397        | 77.298%    | 972             | 28.2              | 40.62°C        | 0.836       |
|      | 12.095V | 5.016V  | 3.308V  | 5.039V | 87.191        |            |                 |                   | 46.57°C        | 230.1V      |

| Test | 12V     | 5V     | 3.3V   | 5VSB   | DC/AC (Watts) | Efficiency | Fan Speed (RPM) | PSU Noise (dB[A]) | Temps (In/Out) | PF/AC Volts |
|------|---------|--------|--------|--------|---------------|------------|-----------------|-------------------|----------------|-------------|
| CL4  | 62.148A | 0A     | 0A     | 0A     | 749.8         | 91.155%    | 1410            | 39.1              | 45.2°C         | 0.98        |
|      | 12.064V | 5.009V | 3.308V | 5.007V | 822.557       |            |                 |                   | 53.95°C        | 229.99V     |

The results above are not used in the certification process

### Light Load Tests

#### 115V

| Test | 12V     | 5V     | 3.3V   | 5VSB   | DC/AC (Watts) | Efficiency | Fan Speed (RPM) | PSU Noise (dB[A]) | Temps (In/Out) | PF/AC Volts |
|------|---------|--------|--------|--------|---------------|------------|-----------------|-------------------|----------------|-------------|
| 20W  | 1.246A  | 0.499A | 0.497A | 0.198A | 20.011        | 73.96%     | 0               | <6.0              | 42.22°C        | 0.881       |
|      | 11.926V | 5.014V | 3.318V | 5.041V | 27.056        |            |                 |                   | 36.64°C        | 114.96V     |
| 40W  | 2.744A  | 0.698A | 0.696A | 0.298A | 40.008        | 81.828%    | 0               | <6.0              | 43.6°C         | 0.942       |
|      | 11.916V | 5.014V | 3.318V | 5.036V | 48.89         |            |                 |                   | 37.78°C        | 114.95V     |
| 60W  | 4.179A  | 0.898A | 0.895A | 0.398A | 60.007        | 83.958%    | 0               | <6.0              | 44.77°C        | 0.96        |
|      | 12.092V | 5.013V | 3.317V | 5.03V  | 71.474        |            |                 |                   | 38.59°C        | 114.95V     |
| 80W  | 5.652A  | 1.098A | 1.095A | 0.498A | 79.976        | 86.787%    | 0               | <6.0              | 46.48°C        | 0.969       |
|      | 12.093V | 5.013V | 3.317V | 5.024V | 92.152        |            |                 |                   | 39.63°C        | 114.94V     |

The results above are not used in the certification process

#### 230V

| Test | 12V     | 5V     | 3.3V   | 5VSB   | DC/AC (Watts) | Efficiency | Fan Speed (RPM) | PSU Noise (dB[A]) | Temps (In/Out) | PF/AC Volts |
|------|---------|--------|--------|--------|---------------|------------|-----------------|-------------------|----------------|-------------|
| 20W  | 1.245A  | 0.499A | 0.497A | 0.198A | 19.999        | 74.345%    | 0               | <6.0              | 44.36°C        | 0.519       |
|      | 11.928V | 5.015V | 3.318V | 5.041V | 26.902        |            |                 |                   | 36.99°C        | 230.14V     |
| 40W  | 2.744A  | 0.698A | 0.696A | 0.298A | 39.998        | 82.743%    | 0               | <6.0              | 44.65°C        | 0.694       |
|      | 11.916V | 5.014V | 3.318V | 5.036V | 48.34         |            |                 |                   | 37.77°C        | 230.14V     |
| 60W  | 4.179A  | 0.898A | 0.895A | 0.398A | 59.997        | 84.858%    | 0               | <6.0              | 44.27°C        | 0.79        |
|      | 12.091V | 5.014V | 3.318V | 5.03V  | 70.707        |            |                 |                   | 38.26°C        | 230.13V     |
| 80W  | 5.650A  | 1.097A | 1.094A | 0.498A | 79.947        | 87.689%    | 0               | <6.0              | 45.2°C         | 0.841       |
|      | 12.092V | 5.014V | 3.317V | 5.024V | 91.171        |            |                 |                   | 39.04°C        | 230.13V     |

The results above are not used in the certification process

## Ripple Measurements

### 115V

| Test       | 12V     | 5V      | 3.3V    | 5VSB    | Pass/Fail |
|------------|---------|---------|---------|---------|-----------|
| 10% Load   | 20.81mV | 8.26mV  | 5.75mV  | 7.95mV  | Pass      |
| 20% Load   | 23.42mV | 10.41mV | 7.73mV  | 6.52mV  | Pass      |
| 30% Load   | 15.99mV | 8.47mV  | 5.24mV  | 6.93mV  | Pass      |
| 40% Load   | 12.47mV | 13.98mV | 11.34mV | 7.03mV  | Pass      |
| 50% Load   | 11.80mV | 8.16mV  | 5.44mV  | 6.73mV  | Pass      |
| 60% Load   | 13.53mV | 9.49mV  | 5.54mV  | 8.30mV  | Pass      |
| 70% Load   | 15.01mV | 9.39mV  | 6.00mV  | 8.56mV  | Pass      |
| 80% Load   | 14.91mV | 10.00mV | 9.56mV  | 9.32mV  | Pass      |
| 90% Load   | 15.67mV | 11.94mV | 11.24mV | 10.75mV | Pass      |
| 100% Load  | 23.25mV | 13.35mV | 11.85mV | 11.42mV | Pass      |
| 110% Load  | 24.74mV | 14.53mV | 11.88mV | 11.12mV | Pass      |
| Crossload1 | 10.78mV | 10.54mV | 11.72mV | 9.65mV  | Pass      |
| Crossload2 | 17.45mV | 10.76mV | 7.27mV  | 8.46mV  | Pass      |
| Crossload3 | 18.67mV | 9.03mV  | 12.61mV | 9.07mV  | Pass      |
| Crossload4 | 22.72mV | 9.77mV  | 7.29mV  | 10.22mV | Pass      |

The results above are not used in the certification process

### 230V

| Test     | 12V     | 5V      | 3.3V    | 5VSB   | Pass/Fail |
|----------|---------|---------|---------|--------|-----------|
| 10% Load | 20.61mV | 9.54mV  | 6.66mV  | 8.46mV | Pass      |
| 20% Load | 27.54mV | 10.86mV | 7.83mV  | 7.49mV | Pass      |
| 30% Load | 16.65mV | 9.08mV  | 5.34mV  | 7.34mV | Pass      |
| 40% Load | 12.63mV | 13.72mV | 10.89mV | 7.28mV | Pass      |
| 50% Load | 12.52mV | 9.44mV  | 6.20mV  | 7.59mV | Pass      |
| 60% Load | 13.38mV | 10.00mV | 5.90mV  | 8.51mV | Pass      |


| Test       | 12V     | 5V      | 3.3V    | 5VSB    | Pass/Fail |
|------------|---------|---------|---------|---------|-----------|
| 70% Load   | 14.20mV | 9.95mV  | 6.26mV  | 9.17mV  | Pass      |
| 80% Load   | 14.70mV | 10.25mV | 9.71mV  | 9.02mV  | Pass      |
| 90% Load   | 16.13mV | 13.16mV | 11.34mV | 9.42mV  | Pass      |
| 100% Load  | 23.96mV | 13.40mV | 11.60mV | 10.53mV | Pass      |
| 110% Load  | 25.29mV | 15.14mV | 12.29mV | 11.15mV | Pass      |
| Crossload1 | 11.48mV | 12.66mV | 11.54mV | 9.83mV  | Pass      |
| Crossload2 | 19.49mV | 11.17mV | 7.58mV  | 9.17mV  | Pass      |
| Crossload3 | 19.64mV | 9.95mV  | 12.51mV | 9.12mV  | Pass      |
| Crossload4 | 23.54mV | 12.54mV | 7.38mV  | 11.59mV | Pass      |

The results above are not used in the certification process

### Seasonic Focus GX-750 ATX3 (ATX v3.1)



Top side

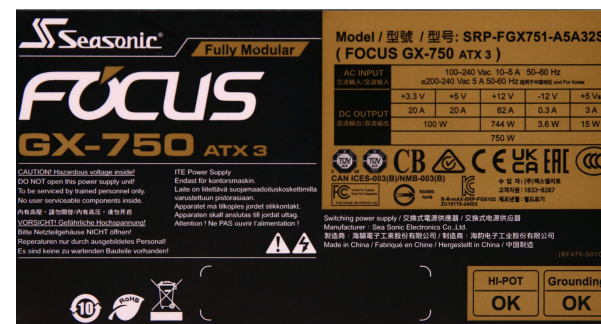

Power specifications label

Cybernetics bietet freiwillige Zertifizierungsprogramme für Netzteile – ETA für Effizienz, LAMBDA für Lautstärke und SAFE für Sicherheit und korrekten Betrieb – sowie für Kühlprodukte mit DELTA für die Schalldämmung von Gehäusen und PHI für Luftstrom und statischen Druck von Lüftern

CYBENETICS LTD Syrou 6, Latsia, 2231, Nicosia Cyprus

[www.cybernetics.com](http://www.cybernetics.com) - [info@cybernetics.com](mailto:info@cybernetics.com)