



ASUS TUF GAMING 1200W Platinum


Serial Number -

Lab ID AS12003231

Certification ID 263231

Test Result Report ID: 26PS3231A

Certificate Issue Date: Apr 15, 2026

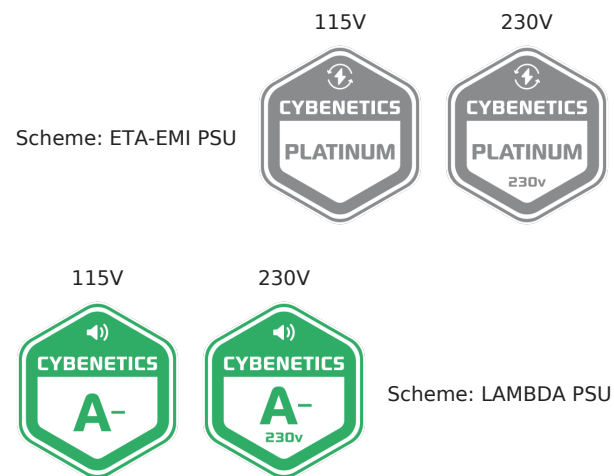

Aristeidis Bitziopoulos, Certification Body General Manager

General Information

Test Equipment

Electronic Loads	Chroma 63601-5 x2 Chroma 63600-2 Chroma 63640-80-80 x10 Chroma 63610-80-20
AC Sources	Chroma 6530, APM SP300VAC4000W-P, GW Instek ASR-3500
Power Analyzers	Rohde & Schwarz HMC8015 & NPA701
Oscilloscopes	Picoscope 4444, Siglent SDS2104X PLUS
Sound Analyzer	Bruel & Kjaer 2270 G4
Microphone	Bruel & Kjaer Type 4955-A
Temperature Logger	Picoscope TC-08
Tachometer	UNI-T UT372
Multimeters	Keysight 34465A
EMI Analyzer	TekBox TBMR-110M-EU
Isolation Transformer	4kVA
UPS	FSP Champ Tower 3kVA, CyberPower OLS3000E 3kVA
Testing Methodology	Cybenetics PSU Test Protocol

DUT Information(Non-accredited measurements)

Product Identification Details	
Brand	ASUS
Model	TUF GAMING 1200W Platinum
OEM/ODM	Great Wall
Serial Number	-
Product Specifications	
Manufacturer-Provided Information	
Rated Voltage (Vrms)	100-240
Rated Current (Arms)	8-15
Rated Frequency (Hz)	47-63

Rated Power (W)	1200
Operating Temperature (Continuous Full Load) (°C)	0 - 40
Type	ATX12V
Cable Design	Fully Modular
Warranty	10 years
Cybenetics Measurements	
Dimensions (W x H x D)	150 x 85 x 150mm
Weight	1.60 kg (3.53 lb)
Cooling	135mm Ball Bearing Fan (HA13525M12B-Z)
Semi-Passive Operation	X
Cybenetics Testing Information	
Lab ID	AS12003231
Date of receipt	Feb 18, 2026
Testing Date	Apr 7, 2026
Report Issued Date	Apr 15, 2026
DUT Notes	The voltage of 3.3V rail drops low (<3.14V) during high power transient testing. As a result, this unit cannot get ATXv3.1 certification from Cybenetics.
Engineer Name	Georgios Theodoros Sarimpalas
Authorized By the Laboratory Technical Manager	Aristeidis Bitziopoulos
Signature	

Cables and Connectors(Non-accredited measurements)

Modular Cables				
Description	Cable Count	Connector Count (Total)	Gauge	Cable Type
ATX connector 20+4 pin (600mm)	1	1	18-22AWG	Tinned Copper
4+4 pin EPS12V (750mm)	2	2	18AWG	Tinned Copper
6+2 pin PCIe (600mm)	6	6	16-18AWG	Tinned Copper
12+4 pin PCIe (600mm) (600W)	2	2	16-24AWG	Tinned Copper
SATA (590mm+150mm+150mm)	3	9	18AWG	Tinned Copper
SATA (590mm+150mm) / 4-pin Molex (+150mm)	2	4 / 2	18AWG	Tinned Copper

Protection Features(Manufacturer)

Over Power Protection	✓
Over Current (+12V) Protection	✓
Over Temperature Protection	✓
Short Circuit Protection	✓
Surge Protection	✓
Inrush Current Protection	✓
Fan Failure Protection	✗

Power Specifications

Rail		3.3V	5V	12V	5VSB	-12V
Max. Power	Amps	25	25	100	3	0.3
	Watts	125		1200	15	3.6
Total Max. Power (W)		1200				

Test Results

Temperature & Compliance Info

Temperature Range (°C /°F)	28-32 / 82.4-89.6
ErP Lot 3/6 Ready	✓
(EU) No 617/2013 Compliance	✓
ALPM (Alternative Low Power Mode) compatible	✓

Performance Summary

115V

Accredited	
Average Efficiency (>1450 load combinations)	90.433%
Average Noise Output (>1450 Load Combinations)	26.27dBA

Average PF (>1450 Load Combinations)	0.982
Efficiency With 10W ($\leq$ 500W) or 2% (>500W) Load	76.858%
Standby Power Consumption	0.0629W
Non-Accredited	
12V Ripple (Full Load)	30.73mV
5V Ripple (Full Load)	17.93mV
3.3V Ripple (Full Load)	15.62mV
5VSB Ripple (Full Load)	17.81mV
12V Load Regulation	0.84%
5V Load Regulation	0.49%
3.3V Load Regulation	2.69%
5VSB Load Regulation	2.71%
Inrush Current	23.800A

230V

Accredited	
Average Efficiency (>1450 load combinations)	92.154%
Average Noise Output (>1450 Load Combinations)	26.22dBA
Average PF (>1450 Load Combinations)	0.951
Efficiency With 10W ($\leq$ 500W) or 2% (>500W) Load	75.423%
Standby Power Consumption	0.1314W
Non-Accredited	
12V Ripple (Full Load)	34.13mV
5V Ripple (Full Load)	19.01mV
3.3V Ripple (Full Load)	15.77mV
5VSB Ripple (Full Load)	17.60mV
12V Load Regulation	0.87%
5V Load Regulation	0.57%
3.3V Load Regulation	2.56%
5VSB Load Regulation	2.65%
Inrush Current	50.650A
12V Transient Response (200%)	11.32V

5V Transient Response (200%)		4.947V
3.3V Transient Response (200%)		3.088V
5VSB Transient Response (200%)		4.983V
Hold-Up Time & PWR_OK Signal		15.40ms
AC Loss to PWR_OK Hold Up Time		11.50ms
PWR_OK Inactive to DC Loss Delay		3.90ms
PSU Timings: T1 (20% / 100%)	49.0ms	49.0ms
PSU Timings: T3 (20% / 100%)	123.0ms	123.0ms
12V OCP (31.5°C / 45.6°C)	129.00A (129.00%), 12.037V	125.40A (125.40%), 12.039V
5V OCP (31.5°C / 45.6°C)	33.6A (134.40%), 5.068V	33.4A (133.60%), 5.074V
3.3V OCP (31.5°C / 45.6°C)	34.2A (136.80%), 3.232V	33.9A (135.60%), 3.23V
5VSB OCP (31.5°C / 45.6°C)	4.9A (163.33%), 5.111V	4.7A (156.67%), 5.112V
OPP (31.01°C / 43.82°C)	128.22%	123.22%

Hold-Up Time & PWR_OK Signal

Hold-Up Time (ms)	15.4
AC Loss to PWR_OK Hold Up Time (ms)	11.5
PWR_OK Inactive to DC Loss Delay (ms)	3.9

Vampire Power

Tables

115V

Detailed Results						
	Average	Min	Limit Min	Max	Limit Max	Result
Mains Voltage RMS:	115.00 V	114.97 V	113.85 V	115.04 V	116.15 V	PASS
Mains Frequency:	60.00 Hz	59.97 Hz	59.40 Hz	60.02 Hz	60.60 Hz	PASS
Mains Voltage CF:	1.419	1.418	1.340	1.421	1.490	PASS
Mains Voltage THD:	0.13 %	0.09 %	N/A	0.19 %	2.00 %	PASS


Real Power:	0.063 W	0.042 W	N/A	0.090 W	N/A	N/A
Apparent Power:	10.204 W	10.106 W	N/A	10.308 W	N/A	N/A
Power Factor:	0.007	N/A	N/A	N/A	N/A	N/A

230V

Detailed Results						
	Average	Min	Limit Min	Max	Limit Max	Result
Mains Voltage RMS:	230.92 V	230.82 V	227.70 V	230.97 V	232.30 V	PASS
Mains Frequency:	50.00 Hz	49.99 Hz	49.50 Hz	50.01 Hz	50.50 Hz	PASS
Mains Voltage CF:	1.420	1.419	1.340	1.421	1.490	PASS
Mains Voltage THD:	0.17 %	0.14 %	N/A	0.24 %	2.00 %	PASS
Real Power:	0.131 W	0.083 W	N/A	0.305 W	N/A	N/A
Apparent Power:	34.811 W	34.559 W	N/A	35.095 W	N/A	N/A
Power Factor:	0.003	N/A	N/A	N/A	N/A	N/A


Efficiency Graph

115V

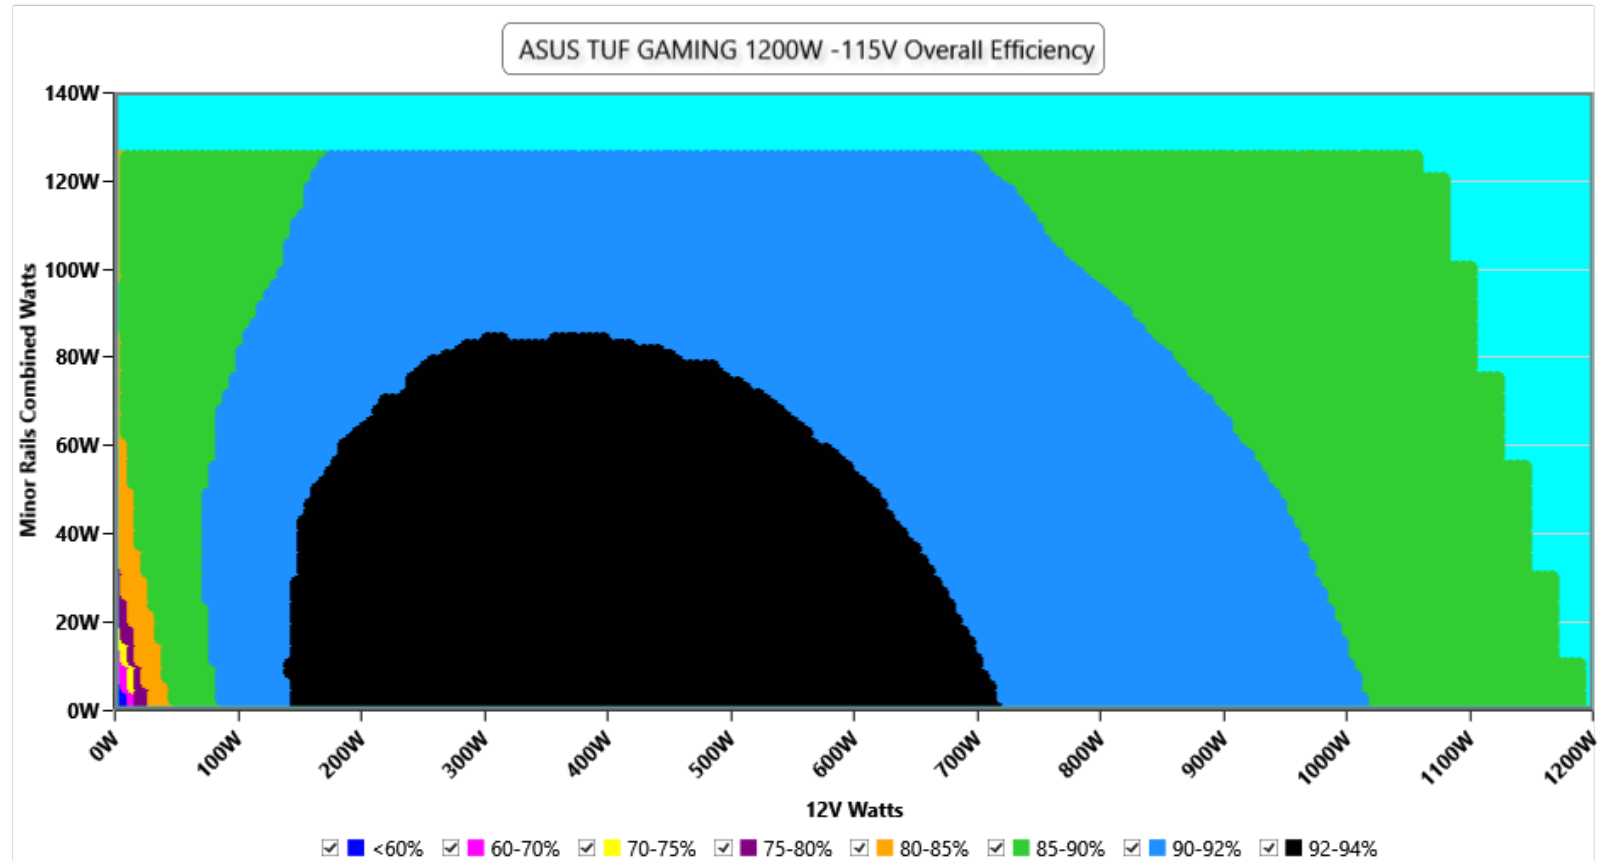

INFO

This graph depicts the PSU's efficiency throughout its entire operational range. For the generation of the efficiency and noise graphs we set our loaders to auto mode through our custom-made software before trying thousands of possible load combinations

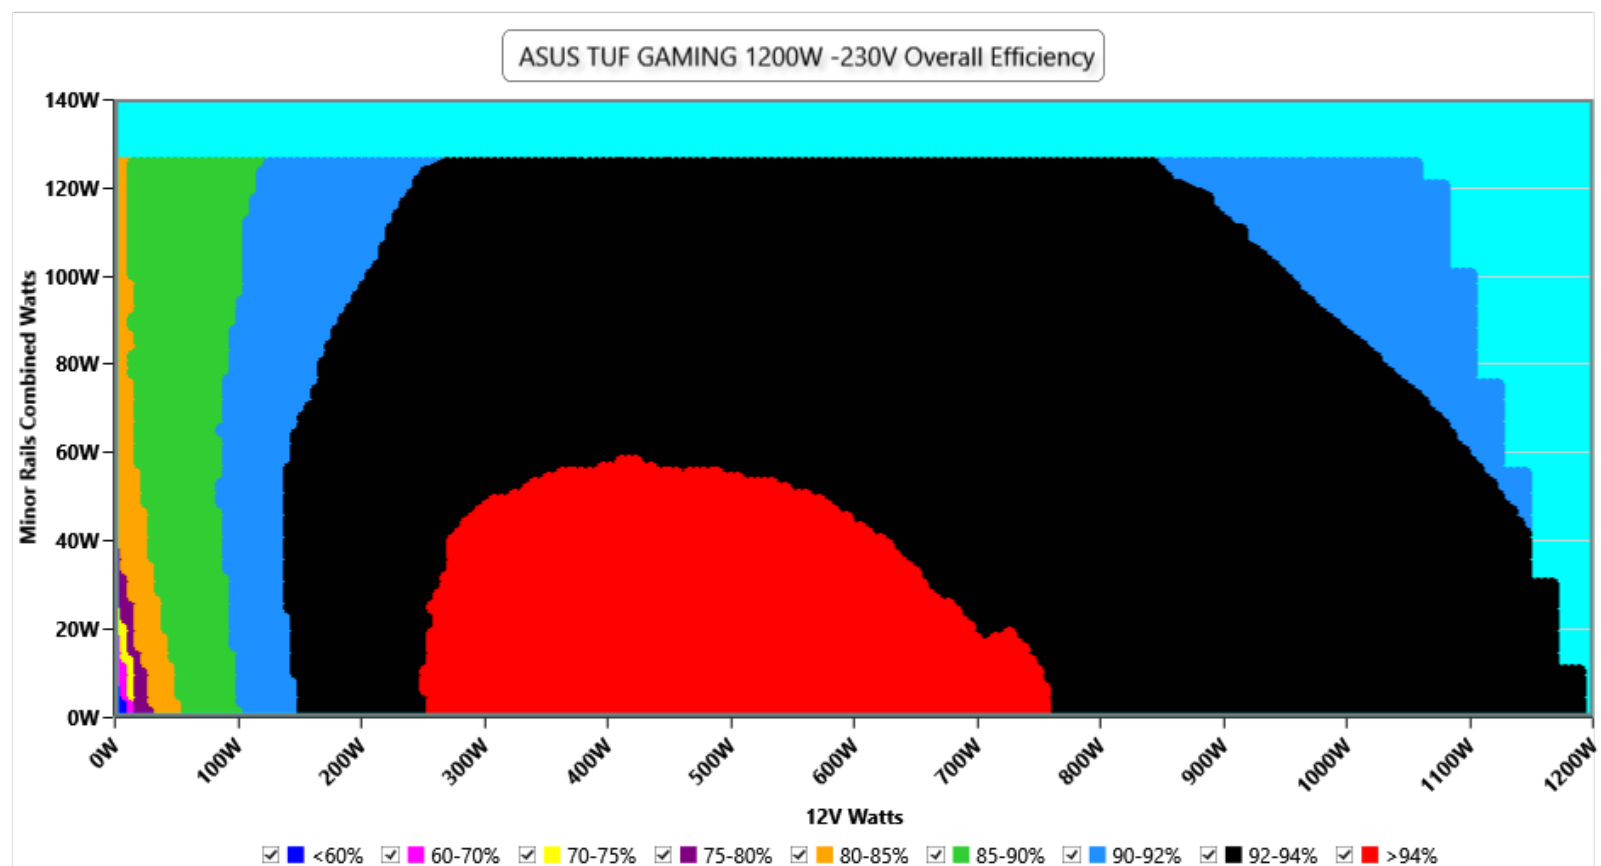


INFO

This graph depicts the PSU's efficiency throughout its entire operational range. For the generation of the efficiency and noise graphs we set our loaders to auto mode through our custom-made software before trying thousands of possible load combinations


Noise Graph

115V

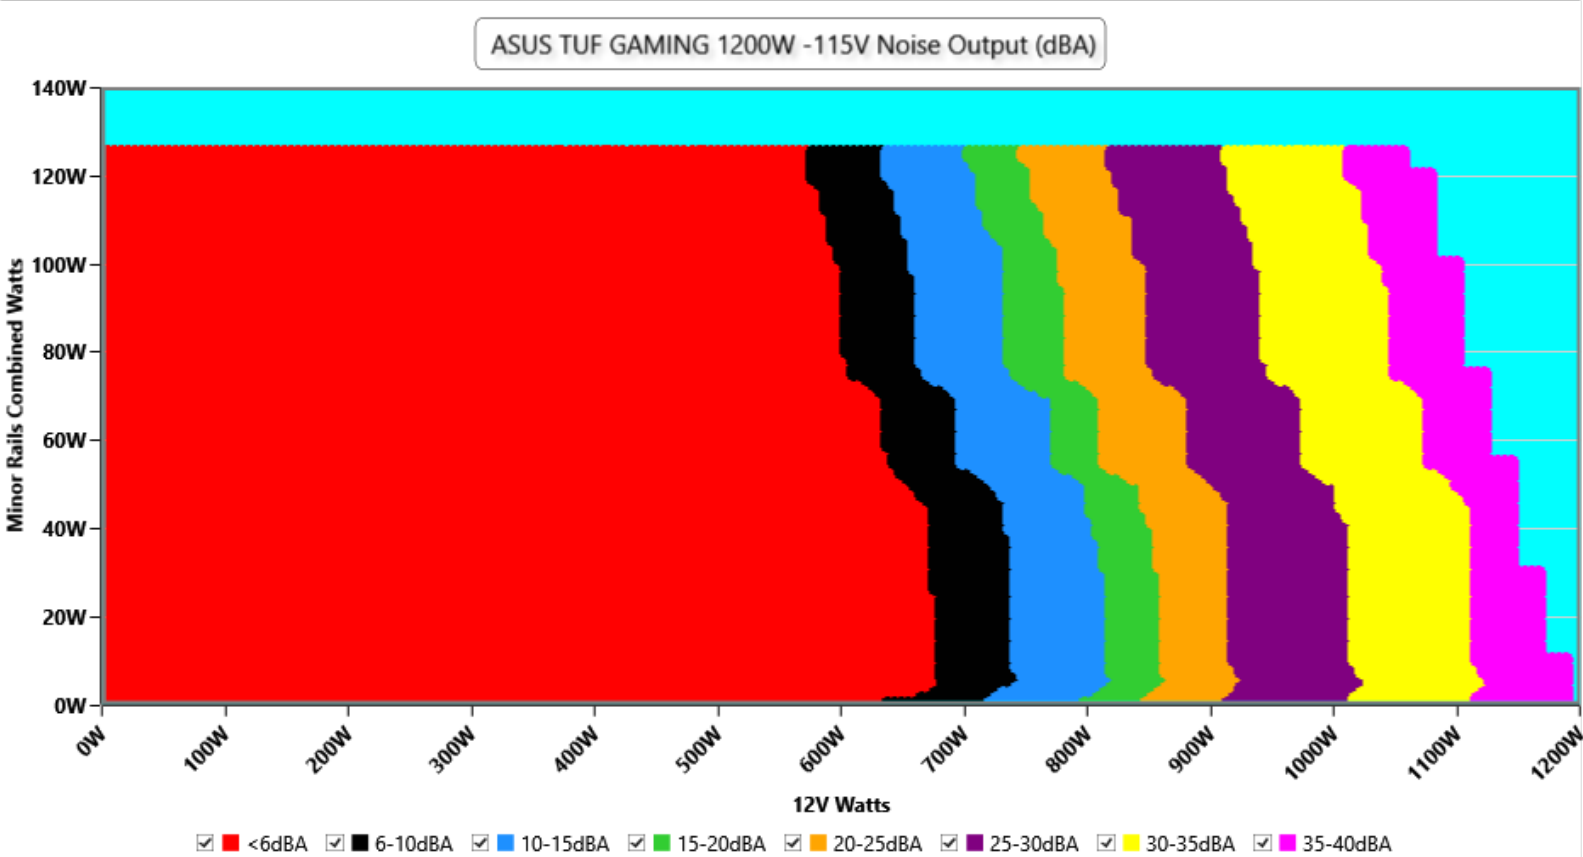

INFO

The PSU`s noise in its entire operational range and under 30-32 °C ambient is depicted in this graph. The X axis represents the load on the +12V rail(s) while the Y axis is the load on the minor rails

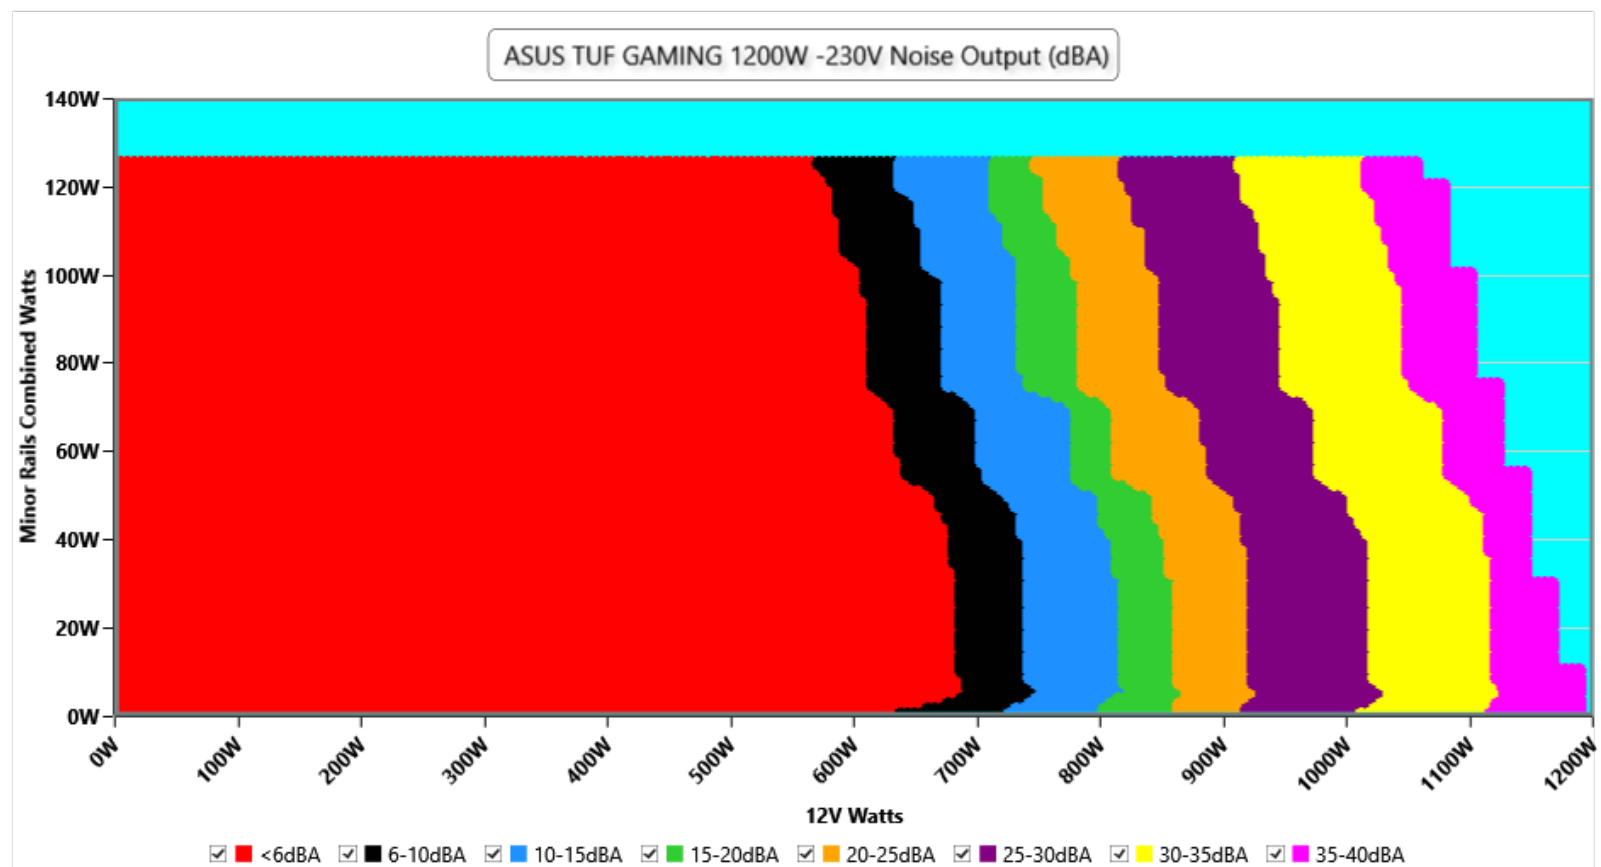


INFO


The PSU's noise in its entire operational range and under 30-32 °C ambient is depicted in this graph. The X axis represents the load on the +12V rail(s) while the Y axis is the load on the minor rails

Conducted Emissions EN 55032 & CISPR 32

Asus Tuf Gaming 1200W (AS12001231) Neutral

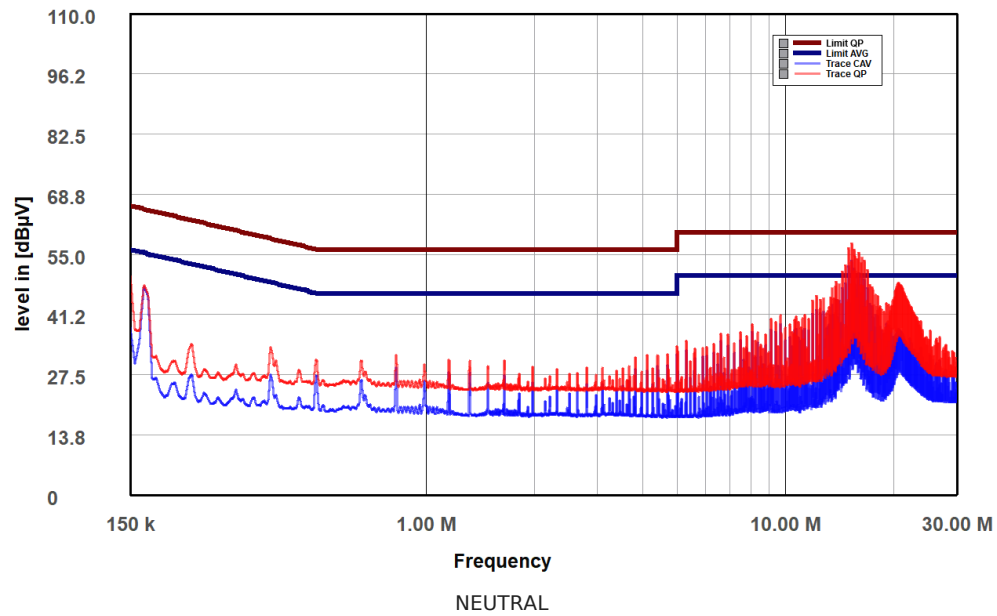

Asus Tuf Gaming 1200W (AS12001231) Phase

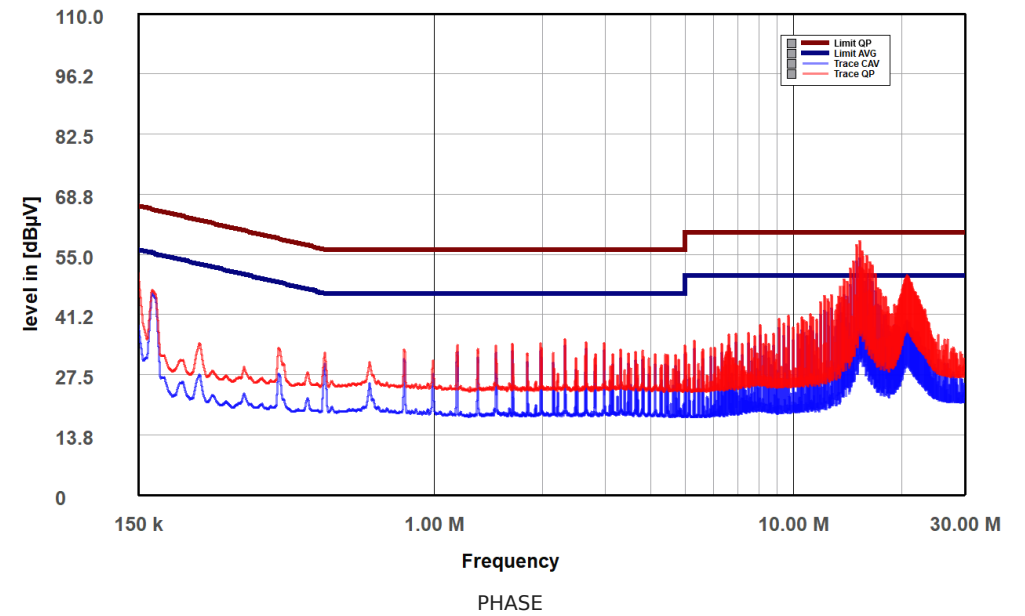


Indicative Performance

Efficiency under high ambient temperature

Efficiency: ASUS TUF GAMING 1200W

Ambient: 36°C - 46°C (96.8°F - 114.8°F)

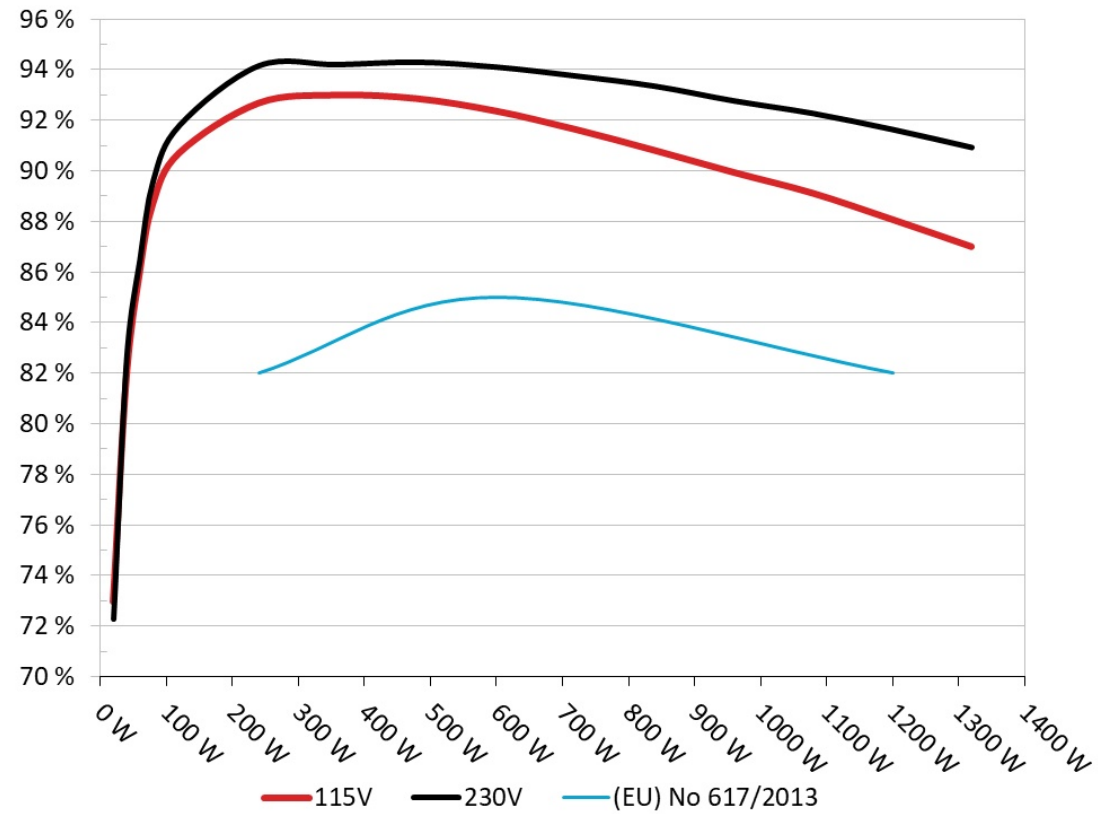


INFO

The PSU's efficiency under high ambient temperatures with 115V and 230V input. For this graph the results of the 10-110% load regulation table are used

5VSB Efficiency

5VSB Efficiency: ASUS TUF GAMING 1200W

Ambient: 25°C - 30°C (77°F - 86°F)

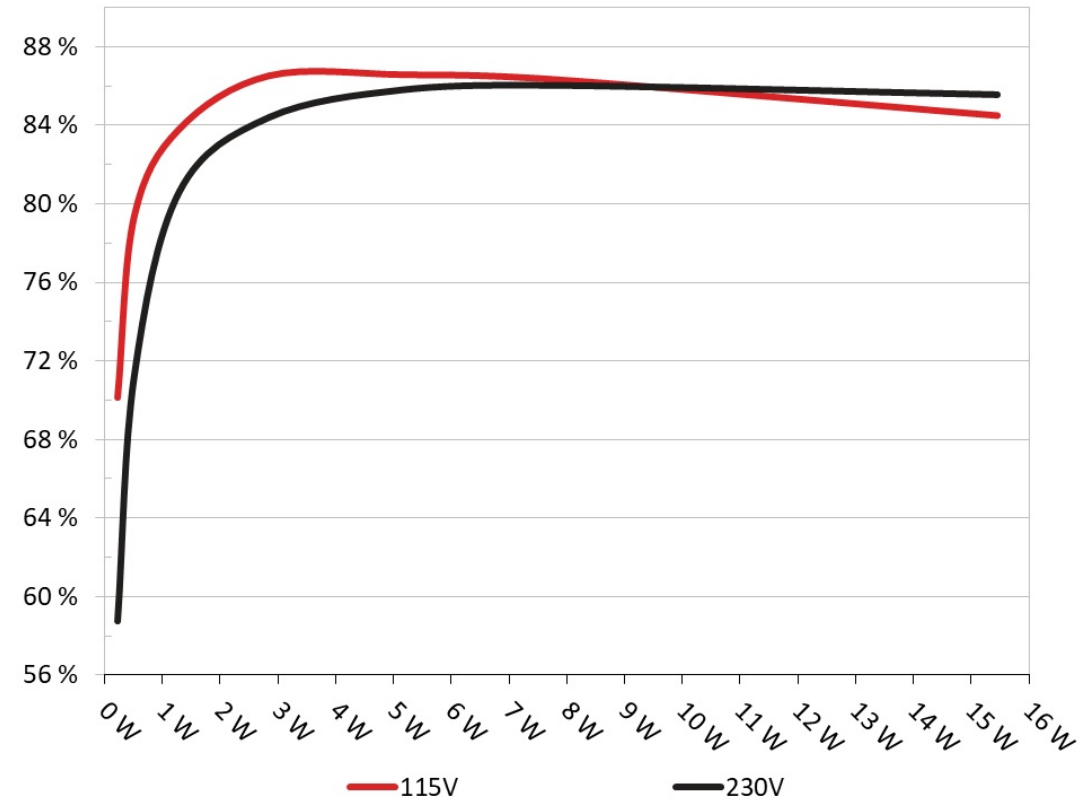

INFO

This graph depicts the efficiency levels of the 5VSB rail with 115V and 230V input

5VSB Efficiency (ERP LOT 3/6 & CEC)

115V

Test #	5VSB	DC/AC (Watts)	Efficiency	PF/AC Volts
1	0.045A	0.234W	70.162%	0.033
	5.194V	0.333W		115.12V
2	0.09A	0.467W	78.398%	0.058
	5.193V	0.596W		115.11V
3	0.55A	2.852W	86.548%	0.256
	5.186V	3.295W		115.11V
4	1A	5.18W	86.604%	0.357
	5.18V	5.981W		115.1V
5	1.5A	7.759W	86.365%	0.412
	5.173V	8.985W		115.1V
6	3A	15.448W	84.524%	0.489
	5.15V	18.277W		115.1V

230V

Test #	5VSB	DC/AC (Watts)	Efficiency	PF/AC Volts
1	0.045A	0.234W	58.732%	0.012
	5.193V	0.398W		230.3V
2	0.09A	0.467W	69.07%	0.02
	5.192V	0.678W		230.31V
3	0.55A	2.852W	84.396%	0.098
	5.185V	3.379W		230.31V
4	1A	5.178W	85.808%	0.163
	5.178V	6.036W		230.3V
5	1.5A	7.757W	86.029%	0.222
	5.171V	9.013W		230.3V
6	3A	15.447W	85.555%	0.329
	5.149V	18.06W		230.3V

Protection Features

OCP (Normal @ 31.5°C)	12V: 129.00A (129.00%), 12.037V 5V: 33.6A (134.40%), 5.068V 3.3V: 34.2A (136.80%), 3.232V 5VSB: 4.9A (163.33%), 5.111V
OCP (Hot @ 45.6°C)	12V: 125.40A (125.40%), 12.039V 5V: 33.4A (133.60%), 5.074V 3.3V: 33.9A (135.60%), 3.23V 5VSB: 4.7A (156.67%), 5.112V
OPP (Normal @ 31.0°C)	1538.65W (128.22%)
OPP (Hot @ 43.8°C)	1478.61W (123.22%)
OTP	✓ (107°C @ 12V Heatsink)
SCP	12V to Earth: ✓ 5V to Earth: ✓ 3.3V to Earth: ✓ 5VSB to Earth: ✓ -12V to Earth: ✓
PWR_OK	Proper Operation
UVP (Full Load @ 90V)	✓
UVP (No Damage @ 80V)	✓
Conducted Emissions EN55032 & CISPR 32	✓
NLO	✓
Fan Failure Protection	✗
SIP	Surge: MOV Inrush: NTC & Bypass Relay

Supplementary Tests (For Reference)

Typical Load Tests

115V

Test	12V	5V	3.3V	5VSB	DC/AC (Watts)	Efficiency	Fan Speed (RPM)	PSU Noise (dB[A])	Temps (In/Out)	PF/AC Volts
10%	8.110A	1.966A	2.016A	0.968A	120	90.724%	395	<6.0	40.14°C	0.955
	12.132V	5.088V	3.273V	5.168V	132.268				43.79°C	115.04V
20%	17.247A	2.95A	3.034A	1.164A	239.965	92.697%	396	<6.0	40.64°C	0.967
	12.122V	5.086V	3.264V	5.156V	258.868				46.65°C	115V
30%	26.681A	3.444A	3.546A	1.361A	359.216	93.017%	394	<6.0	41.15°C	0.976
	12.112V	5.083V	3.257V	5.144V	386.181				50.15°C	114.95V
40%	36.225A	3.937A	4.061A	1.559A	479.598	92.879%	396	<6.0	41.63°C	0.983
	12.102V	5.081V	3.25V	5.132V	516.372				54.4°C	114.91V
50%	45.388A	4.924A	5.092A	1.758A	599.326	92.387%	398	<6.0	42.17°C	0.988
	12.092V	5.079V	3.241V	5.119V	648.716				59.57°C	114.86V
60%	54.632A	5.911A	6.128A	1.959A	719.847	91.661%	420	6.8	42.94°C	0.991
	12.081V	5.077V	3.231V	5.106V	785.334				64.81°C	114.82V
70%	63.825A	6.901A	7.173A	2.16A	839.561	90.831%	660	14.3	43.39°C	0.992
	12.071V	5.073V	3.221V	5.092V	924.313				67.06°C	114.77V
80%	73.107A	7.89A	8.225A	2.264A	959.541	89.959%	933	24.1	43.86°C	0.992
	12.060V	5.07V	3.21V	5.08V	1066.648				68.11°C	114.72V
90%	82.726A	8.388A	8.741A	2.368A	1079.332	89.132%	1186	31.7	44.44°C	0.993
	12.050V	5.067V	3.203V	5.069V	1210.932				68.49°C	114.67V
100%	92.169A	8.886A	9.289A	2.971A	1199.355	88.096%	1408	35.8	45.36°C	0.994
	12.039V	5.064V	3.197V	5.05V	1361.42				71.39°C	114.62V
110%	101.562A	9.878A	10.446A	2.977A	1319.946	87.014%	1565	38.8	46.04°C	0.995
	12.028V	5.062V	3.187V	5.039V	1516.941				74.9°C	114.57V
CL1	0.116A	14.82A	15.534A	0A	126.303	83.898%	401	<6.0	41.56°C	0.958
	12.126V	5.081V	3.193V	5.164V	150.545				59.5°C	115.04V

Test	12V	5V	3.3V	5VSB	DC/AC (Watts)	Efficiency	Fan Speed (RPM)	PSU Noise (dB[A])	Temps (In/Out)	PF/AC Volts
CL2	0.116A	24.578A	0A	0A	126.278	82.326%	401	<6.0	41.19°C	0.958
	12.124V	5.081V	3.292V	5.171V	153.388				54.74°C	115.04V
CL3	0.115A	0A	26.213A	0A	83.884	75.095%	462	7.7	40.77°C	0.955
	12.135V	5.094V	3.147V	5.165V	111.705				50.6°C	115.05V
CL4	99.622A	0A	0A	0A	1199.925	88.872%	1428	36.4	45.49°C	0.994
	12.045V	5.076V	3.259V	5.104V	1350.17				68.47°C	114.63V

The results above are not used in the certification process

230V

Test	12V	5V	3.3V	5VSB	DC/AC (Watts)	Efficiency	Fan Speed (RPM)	PSU Noise (dB[A])	Temps (In/Out)	PF/AC Volts
10%	8.112A	1.966A	2.015A	0.968A	120.007	91.791%	394	<6.0	40.15°C	0.876
	12.131V	5.087V	3.275V	5.165V	130.74				43.32°C	230.26V
20%	17.248A	2.951A	3.031A	1.164A	239.971	94.14%	393	<6.0	40.63°C	0.932
	12.121V	5.084V	3.266V	5.153V	254.909				45.36°C	230.24V
30%	26.685A	3.444A	3.543A	1.362A	359.225	94.184%	394	<6.0	41.36°C	0.947
	12.111V	5.083V	3.26V	5.142V	381.41				47.23°C	230.22V
40%	36.230A	3.938A	4.057A	1.56A	479.605	94.282%	394	<6.0	41.74°C	0.957
	12.100V	5.08V	3.254V	5.13V	508.691				47.88°C	230.2V
50%	45.394A	4.925A	5.085A	1.759A	599.326	94.089%	394	<6.0	42.35°C	0.964
	12.090V	5.077V	3.245V	5.117V	636.976				49.35°C	230.18V
60%	54.641A	5.914A	6.12A	1.959A	719.844	93.738%	415	6.2	42.63°C	0.968
	12.079V	5.074V	3.236V	5.105V	767.934				51.56°C	230.16V
70%	63.833A	6.905A	7.161A	2.161A	839.551	93.333%	652	13.8	43.27°C	0.974
	12.070V	5.071V	3.226V	5.092V	899.519				53.08°C	230.14V
80%	73.118A	7.894A	8.207A	2.264A	959.53	92.753%	928	24	43.74°C	0.975
	12.058V	5.067V	3.217V	5.08V	1034.503				53.76°C	230.11V
90%	82.741A	8.392A	8.722A	2.367A	1079.32	92.257%	1180	31.6	44.52°C	0.977
	12.048V	5.064V	3.21V	5.07V	1169.905				53.38°C	230.09V

Test	12V	5V	3.3V	5VSB	DC/AC (Watts)	Efficiency	Fan Speed (RPM)	PSU Noise (dB[A])	Temps (In/Out)	PF/AC Volts
100%	92.190A	8.891A	9.272A	2.97A	1199.342	91.625%	1403	35.7	45.74°C	0.979
	12.036V	5.061V	3.203V	5.051V	1308.97				53.89°C	230.07V
110%	101.589A	9.884A	10.427A	2.977A	1319.942	90.912%	1564	38.8	46.34°C	0.981
	12.025V	5.058V	3.193V	5.04V	1451.899				55.27°C	230.05V
CL1	0.116A	14.827A	15.485A	0A	126.302	85.19%	399	<6.0	40.46°C	0.89
	12.128V	5.079V	3.203V	5.165V	148.259				50.11°C	230.27V
CL2	0.115A	24.587A	0A	0A	126.276	83.465%	398	<6.0	40.72°C	0.891
	12.126V	5.079V	3.291V	5.172V	151.294				47.54°C	230.27V
CL3	0.114A	0A	26.094A	0A	83.881	76.111%	458	7.7	40.24°C	0.859
	12.136V	5.092V	3.161V	5.166V	110.206				45.13°C	230.28V
CL4	99.646A	0A	0A	0A	1199.906	92.218%	1421	36.3	45.78°C	0.979
	12.042V	5.072V	3.257V	5.105V	1301.168				51.07°C	230.08V

The results above are not used in the certification process

Light Load Tests

115V

Test	12V	5V	3.3V	5VSB	DC/AC (Watts)	Efficiency	Fan Speed (RPM)	PSU Noise (dB[A])	Temps (In/Out)	PF/AC Volts
20W	1.224A	0.491A	0.503A	0.193A	20.006	72.951%	390	<6.0	36.17°C	0.857
	12.140V	5.087V	3.283V	5.187V	27.423				37.36°C	115.08V
40W	2.694A	0.688A	0.704A	0.289A	40.004	81.799%	392	<6.0	37.92°C	0.906
	12.139V	5.089V	3.283V	5.185V	48.905				39.72°C	115.08V
60W	4.164A	0.884A	0.905A	0.386A	60.003	85.974%	392	<6.0	38.56°C	0.938
	12.137V	5.089V	3.282V	5.182V	69.792				39.97°C	115.07V
80W	5.630A	1.081A	1.107A	0.483A	79.95	88.704%	393	<6.0	39.1°C	0.946
	12.136V	5.089V	3.28V	5.179V	90.131				40.51°C	115.06V

The results above are not used in the certification process

230V

Test	12V	5V	3.3V	5VSB	DC/AC (Watts)	Efficiency	Fan Speed (RPM)	PSU Noise (dB[A])	Temps (In/Out)	PF/AC Volts
20W	1.224A	0.491A	0.502A	0.193A	20.019	72.284%	391	<6.0	37°C	0.556
	12.141V	5.089V	3.285V	5.185V	27.696				41.44°C	230.27V
40W	2.694A	0.688A	0.703A	0.29A	40.012	82.648%	391	<6.0	37.66°C	0.714
	12.139V	5.09V	3.284V	5.182V	48.415				41.89°C	230.27V
60W	4.164A	0.884A	0.905A	0.386A	60.008	86.491%	393	<6.0	38.63°C	0.792
	12.137V	5.09V	3.283V	5.179V	69.378				42.19°C	230.27V
80W	5.630A	1.081A	1.106A	0.483A	79.958	89.595%	394	<6.0	39.36°C	0.833
	12.135V	5.089V	3.281V	5.176V	89.241				42.7°C	230.27V

The results above are not used in the certification process

Ripple Measurements

115V

Test	12V	5V	3.3V	5VSB	Pass/Fail
10% Load	23.41mV	14.32mV	11.79mV	9.45mV	Pass
20% Load	20.47mV	14.79mV	12.46mV	9.19mV	Pass
30% Load	20.31mV	14.79mV	12.57mV	9.91mV	Pass
40% Load	21.24mV	15.04mV	12.62mV	10.74mV	Pass
50% Load	25.47mV	16.02mV	12.67mV	10.48mV	Pass
60% Load	27.48mV	15.51mV	13.50mV	12.44mV	Pass
70% Load	30.52mV	17.05mV	13.50mV	13.11mV	Pass
80% Load	26.86mV	18.34mV	15.05mV	13.52mV	Pass
90% Load	28.36mV	17.51mV	15.15mV	13.73mV	Pass
100% Load	30.73mV	17.93mV	15.62mV	17.81mV	Pass
110% Load	39.65mV	19.01mV	15.92mV	18.17mV	Pass
Crossload1	23.77mV	16.80mV	15.25mV	11.04mV	Pass
Crossload2	23.51mV	24.32mV	12.56mV	11.04mV	Pass

Test	12V	5V	3.3V	5VSB	Pass/Fail
Crossload3	30.57mV	15.15mV	18.51mV	10.84mV	Pass
Crossload4	27.43mV	16.90mV	14.53mV	13.21mV	Pass

The results above are not used in the certification process

230V

Test	12V	5V	3.3V	5VSB	Pass/Fail
10% Load	24.39mV	15.20mV	12.77mV	9.55mV	Pass
20% Load	22.22mV	16.33mV	12.98mV	9.91mV	Pass
30% Load	26.81mV	15.92mV	13.19mV	10.27mV	Pass
40% Load	24.02mV	16.18mV	14.01mV	10.32mV	Pass
50% Load	24.85mV	17.15mV	13.96mV	11.36mV	Pass
60% Load	25.62mV	17.00mV	14.07mV	11.87mV	Pass
70% Load	31.76mV	16.95mV	13.91mV	13.11mV	Pass
80% Load	28.41mV	17.72mV	15.15mV	13.73mV	Pass
90% Load	29.59mV	18.45mV	15.26mV	14.25mV	Pass
100% Load	34.13mV	19.01mV	15.77mV	17.60mV	Pass
110% Load	41.04mV	19.79mV	17.17mV	18.22mV	Pass
Crossload1	24.70mV	17.21mV	16.60mV	10.89mV	Pass
Crossload2	25.21mV	25.14mV	13.19mV	11.05mV	Pass
Crossload3	29.23mV	16.28mV	18.20mV	10.89mV	Pass
Crossload4	30.31mV	17.83mV	14.38mV	12.29mV	Pass

The results above are not used in the certification process

A black, cube-shaped ATX 3.0 power supply unit. The top features a large circular fan with a black frame and a silver center cap with the ASUS TUF logo. The front panel has a silver TUF logo and the text "1200 W" and "TUF GAMING" in silver. The left side shows a mesh-covered fan area and a power input port.

TUF GAMING

TUF GAMING 1200W

機型/型号/Model: TUF_GAMING-1200P

產品：交換式電源供應器/产品：交換式電源供應器/Product: Switching power supply
製造商：華碩電腦股份有限公司 制造商：华硕电脑股份有限公司
Manufacturer: ASUS Tek Computer Inc. 制造商：华硕国际(Made in China)
ASUS COMPUTER GmbH HARTMUT STR.21-23, 40884 Ratingen, Germany

AC INPUT/AC 輸入	(200V~240V) 1A 47~63Hz (適用於北美地區使用) (適用於歐洲及澳洲地區)				
交流輸入 / 交流輸入	+3.3V	+5V	+12V	-12V	+5VB
DC OUTPUT/DC 輸出					
直流輸出 / 直流輸出	25A	25A	100A	0.3A	3A
MAX CONTINUOUS RATING					
最大連續額定值	125W	1200W	360W	3A	1200W
最大負載能力	TOTAL POWER(總功率) 峰值 / 電壓 / 電流 = 1200W				

ASUS
IN SEARCH OF INCREDIBLE

VORSICHT! Gefährliche Hochspannung!
Bitte Netzsteckdose NICHT öffnen!
Reparaturen nur durch qualifizierten Personal!
Beim Öffnen der Netzteile besteht Lebensgefahr!
FETAL Power Supply
Erdet für Sicherheit.
Lade nie Handlithium-Supercapacitor-Kondensatoren
neuzeitlich geladen.
Apparatus may explode prior to activation!
Do not open this power supply until
authorized HP 945 owner or technician!
CAUTION! Hazardous voltage inside!
DO NOT open this power supply unit
to be serviced by trained personnel only.
No user serviceable components inside.
内部危險，請勿隨意拆開，請勿自行修理。

警告：高壓危險！
請勿擅自拆開此電源供應器，否則有損健康。
只有經授權的維修人員才能進行修理。
切勿嘗試自行修理！

Cybenetics - ASUS TUF GAMING 1200W Platinum - Test Report - Page 22 / 22