



Make It Yours.

Cooler Master MWE Gold 750 V4

Serial Number -

Lab ID CM75003436

Certification ID 263436

Test Result Report ID: 26PS3436A

Certificate Issue Date: Oct 8, 2026

115V

230V

Scheme: ETA-EMI PSU

115V

230V

Scheme: LAMBDA PSU

Outside Validation Scope

General Information

Test Equipment

Electronic Loads	Chroma 63601-5 x2 Chroma 63600-2 Chroma 63640-80-80 x10 Chroma 63610-80-20
AC Sources	Chroma 6530, APM SP300VAC4000W-P, GW Instek ASR-3500
Power Analyzers	Rohde & Schwarz HMC8015 & NPA701
Oscilloscopes	Picoscope 4444, Siglent SDS2104X PLUS
Sound Analyzer	Bruel & Kjaer 2270 G4
Microphone	Bruel & Kjaer Type 4955-A
Temperature Logger	Picoscope TC-08
Tachometer	UNI-T UT372
Multimeters	Keysight 34465A
EMI Analyzer	TekBox TBMR-110M-EU
Isolation Transformer	4kVA
UPS	FSP Champ Tower 3kVA, CyberPower OLS3000E 3kVA
Testing Methodology	Cybenetics PSU Test Protocol

DUT Information(Non-accredited measurements)

Product Identification Details	
Brand	Cooler Master
Model	MWE Gold 750 V4
OEM/ODM	GOSPOWER
Serial Number	-
Product Specifications	
Manufacturer-Provided Information	
Rated Voltage (Vrms)	100-240
Rated Current (Arms)	6-10

Rated Frequency (Hz)	50-60
Rated Power (W)	750
Operating Temperature (Continuous Full Load) (°C)	0 - 40
Type	ATX12V
Cable Design	Fully Modular
Warranty	10 years
Cybenetics Measurements	
Dimensions (W x H x D)	150 x 86 x 140mm
Weight	1.32 kg (2.91 lb)
Cooling	120mm Fluid Dynamic Bearing Fan (HA1225H12F-Z)
Semi-Passive Operation	✓
Cybenetics Testing Information	
Lab ID	CM75003436
Date of receipt	Sep 10, 2026
Testing Date	Oct 7, 2026
Report Issued Date	Oct 8, 2026
Engineer Name	Ioannis Kalyviotis
Authorized By the Laboratory Technical Manager	Aristeidis Bitziopoulos
Signature	

Cables and Connectors(Non-accredited measurements)

Description	Cable Count	Connector Count (Total)	Gauge	Cable Type
ATX connector 24 pin (600mm)	1	1	18AWG	Tinned Copper
4+4 pin EPS12V (700mm)	1	1	18AWG	Tinned Copper
8 pin EPS12V (700mm)	1	1	18AWG	Tinned Copper
6+2 pin PCIe (600mm+125mm)	2	4	16-18AWG	Tinned Copper
12+4 pin PCIe (600mm) (600W)	1	1	16-24AWG	Tinned Copper
SATA (400mm+110mm+110mm)	2	6	18AWG	Tinned Copper
4-pin Molex (400mm+120mm+120mm)	1	3	18AWG	Tinned Copper

AC Power Cord (1350mm) - C13 coupler	1	1	3G 0.75mm²	-

Protection Features(Manufacturer)

Over Power Protection	✓
Over Current (+12V) Protection	✓
Over Temperature Protection	✓
Short Circuit Protection	✓
Surge Protection	✓
Inrush Current Protection	✓
Fan Failure Protection	✗

Power Specifications

Rail		3.3V	5V	12V	5VSB	-12V
Max. Power	Amps	20	20	62.5	3	0.3
	Watts	120	750	15	3.6	
Total Max. Power (W)		750				

Parts Description

General Data	
Manufacturer (OEM)	GOSPOWER
PCB Type	Double-Sided
Primary Side	
Transient Filter	4x Y caps, 3x X caps, 2x CM chokes, 1x MOV
Inrush Protection	1x NTC 5D-20 (5 Ohm @ 25°C) & Relay
Bridge Rectifier	2x GBU1008 (800V, 10A @ 100°C)
APFC MOSFETs	1x CR Micro CRJQ80N65F (650V, 33.7A @ 100°C, Rds(on): 0.090Ohm)
APFC Boost Diode	1x Zhixin Microelectronics SDC10065NAS (650V, 10A @ 150°C)
Bulk Cap(s)	1x Toshin Kogyo (450V, 390uF, 2000h @ 105°C, LGW)
Main Switchers	2x CR Micro CRJF99N65G2BF (650V, 20A @ 100°C, Rds(on): 0.099Ohm)

APFC+LLC Combo Controller	MPS HR1280
Topology	Primary side: APFC, Half-Bridge & LLC Resonant Converter Secondary side: [12V] Synchronous Rectification & [Minor Rails] DC-DC converters
Secondary Side	
+12V MOSFETs	4x 014N04B
5V & 3.3V	DC-DC Converters: 4x CRSM035N03L6Z (30V, 54A @ 100°C, Rds(on): 3.5mOhm) PWM Controller(s): 1x APW7391
Filtering Capacitors	Electrolytic: 2x CapXon (2000~5000h@ 105°C, KF) 1x CapXon (3000~7000h @ 105°C, GH) 1x Elite (2000h @ 105°C, EL) Polymer: 17x CapXon 19x Nichicon
Supervisor IC	INFSitronix IN1T709-SDG
Fan Model	Hong Hua HA1225H12F-Z (120mm, 12V, 0.58A, Fluid Dynamic Bearing Fan)
5VSB Circuit	
Rectifier	Yangjie SS10U45
Standby PWM Controller	INFSitronix IN2P380C

Test Results

Temperature & Compliance Info

Temperature Range (°C /°F)	28-32 / 82.4-89.6
ErP Lot 3/6 Ready	✓
(EU) No 617/2013 Compliance	✓
ALPM (Alternative Low Power Mode) compatible	✓
ATX v3.1 PSU Power Excursion	✓
Conducted Emissions EN 55032 & CISPR 32	Passed

Performance Summary

115V

Accredited	
Average Efficiency (>1450 load combinations)	88.796%
Average Noise Output (>1450 Load Combinations)	25.96dBA
Average PF (>1450 Load Combinations)	0.987
Efficiency With 10W ($\leq 500W$) or 2% (>500W) Load	64.830%
Standby Power Consumption	0.0595W
Non-Accredited	
12V Ripple (Full Load)	29.15mV
5V Ripple (Full Load)	20.66mV
3.3V Ripple (Full Load)	22.74mV
5VSB Ripple (Full Load)	21.40mV
12V Load Regulation	0.68%
5V Load Regulation	0.18%
3.3V Load Regulation	0.36%
5VSB Load Regulation	3.54%
Inrush Current	23.250A

230V

Accredited	
Average Efficiency (>1450 load combinations)	91.296%
Average Noise Output (>1450 Load Combinations)	25.96dBA
Average PF (>1450 Load Combinations)	0.936
Efficiency With 10W ($\leq 500W$) or 2% (>500W) Load	68.368%
Standby Power Consumption	0.1502W
Non-Accredited	
12V Ripple (Full Load)	31.45mV
5V Ripple (Full Load)	20.40mV
3.3V Ripple (Full Load)	23.91mV

5VSB Ripple (Full Load)		21.96mV
12V Load Regulation		0.69%
5V Load Regulation		0.12%
3.3V Load Regulation		0.24%
5VSB Load Regulation		3.56%
Inrush Current		60.160A
12V Transient Response (200%)		11.48V
5V Transient Response (200%)		4.947V
3.3V Transient Response (200%)		3.245V
5VSB Transient Response (200%)		4.931V
Hold-Up Time & PWR_OK Signal		23.20ms
AC Loss to PWR_OK Hold Up Time		19.00ms
PWR_OK Inactive to DC Loss Delay		4.20ms
PSU Timings: T1 (20% / 100%)	108.0ms	111.0ms
PSU Timings: T3 (20% / 100%)	120.0ms	119.0ms
12V OCP (29.2°C / 42.9°C)	70.900A (113.44%), 11.989V — shut down	70.900A (113.44%), 11.986V — shut down
5V OCP (29.2°C / 42.9°C)	24.100A (120.50%), 5.147V — shut down	24.200A (121.00%), 5.166V — shut down
3.3V OCP (29.2°C / 42.9°C)	23.800A (119.00%), 3.439V — shut down	23.800A (119.00%), 3.450V — shut down
5VSB OCP (29.2°C / 42.9°C)	4.300A (143.33%), 4.869V — shut down	4.300A (143.33%), 4.865V — shut down
OPP (28.49°C / 42.43°C)	129.18%	129.17%

Hold-Up Time & PWR_OK Signal

Hold-Up Time (ms)	23.2
AC Loss to PWR_OK Hold Up Time (ms)	19.0
PWR_OK Inactive to DC Loss Delay (ms)	4.2



Tables

115V


Detailed Results						
	Average	Min	Limit Min	Max	Limit Max	Result
Mains Voltage RMS:	115.00 V	114.98 V	113.85 V	115.01 V	116.15 V	PASS
Mains Frequency:	60.00 Hz	59.91 Hz	59.40 Hz	60.01 Hz	60.60 Hz	PASS
Mains Voltage CF:	1.416	1.415	1.340	1.416	1.490	PASS
Mains Voltage THD:	0.13 %	0.11 %	N/A	0.16 %	2.00 %	PASS
Real Power:	0.060 W	0.006 W	N/A	0.096 W	N/A	N/A
Apparent Power:	17.440 W	17.423 W	N/A	17.459 W	N/A	N/A
Power Factor:	0.004	N/A	N/A	N/A	N/A	N/A

230V

Detailed Results						
	Average	Min	Limit Min	Max	Limit Max	Result
Mains Voltage RMS:	230.00 V	229.98 V	227.70 V	230.01 V	232.30 V	PASS
Mains Frequency:	50.00 Hz	49.99 Hz	49.50 Hz	50.00 Hz	50.50 Hz	PASS
Mains Voltage CF:	1.415	1.415	1.340	1.416	1.490	PASS
Mains Voltage THD:	0.14 %	0.13 %	N/A	0.16 %	2.00 %	PASS
Real Power:	0.150 W	0.099 W	N/A	0.264 W	N/A	N/A
Apparent Power:	57.874 W	57.837 W	N/A	57.914 W	N/A	N/A
Power Factor:	0.003	N/A	N/A	N/A	N/A	N/A


Efficiency Graph

115V

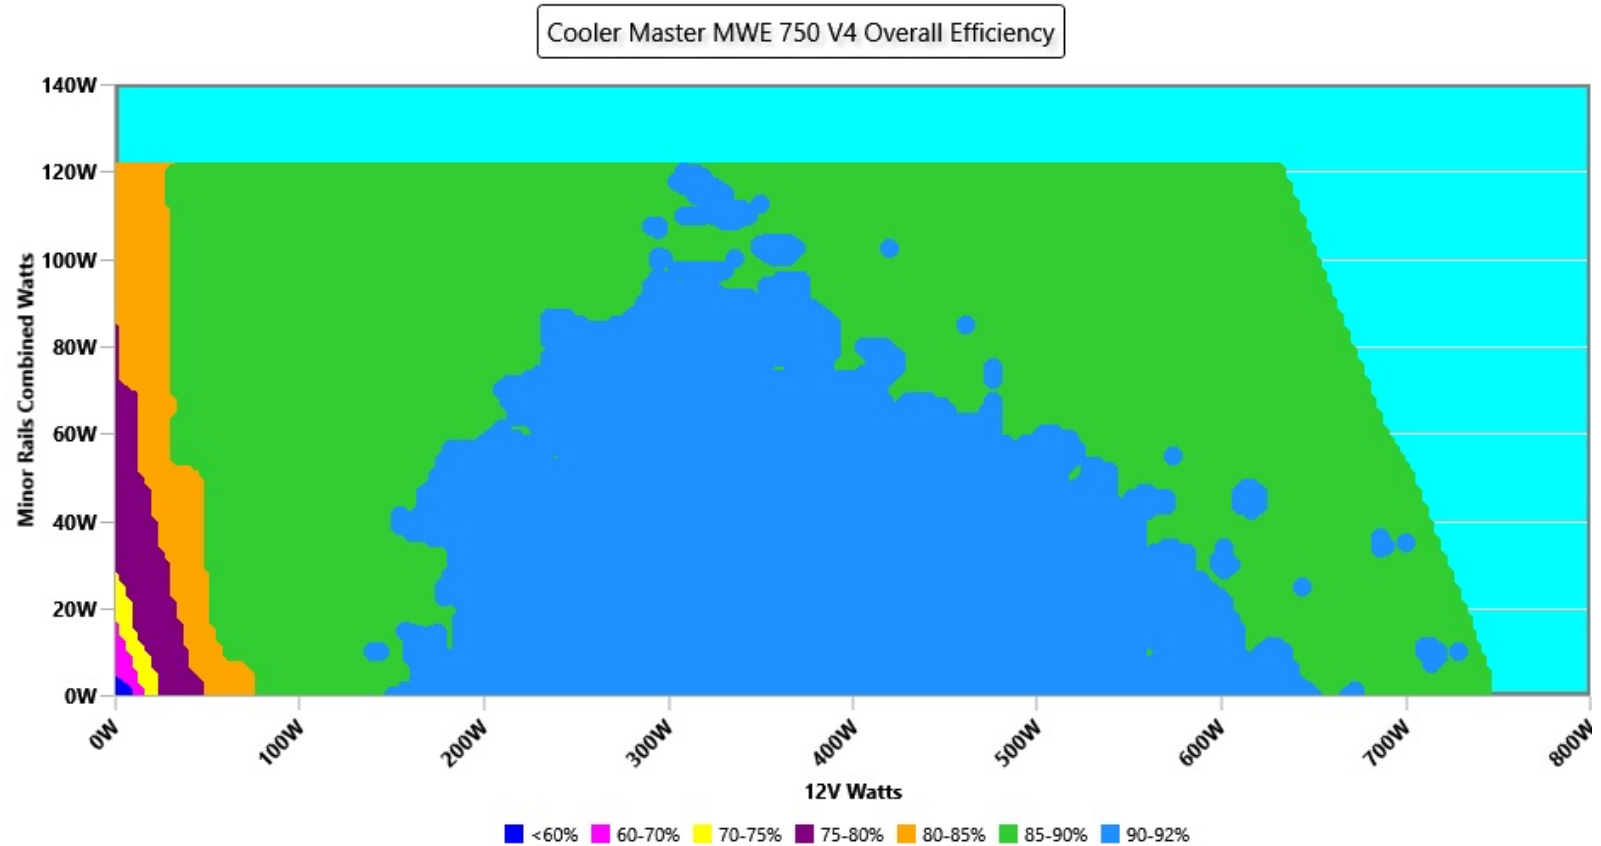

INFO

This graph depicts the PSU's efficiency throughout its entire operational range. For the generation of the efficiency and noise graphs we set our loaders to auto mode through our custom-made software before trying thousands of possible load combinations

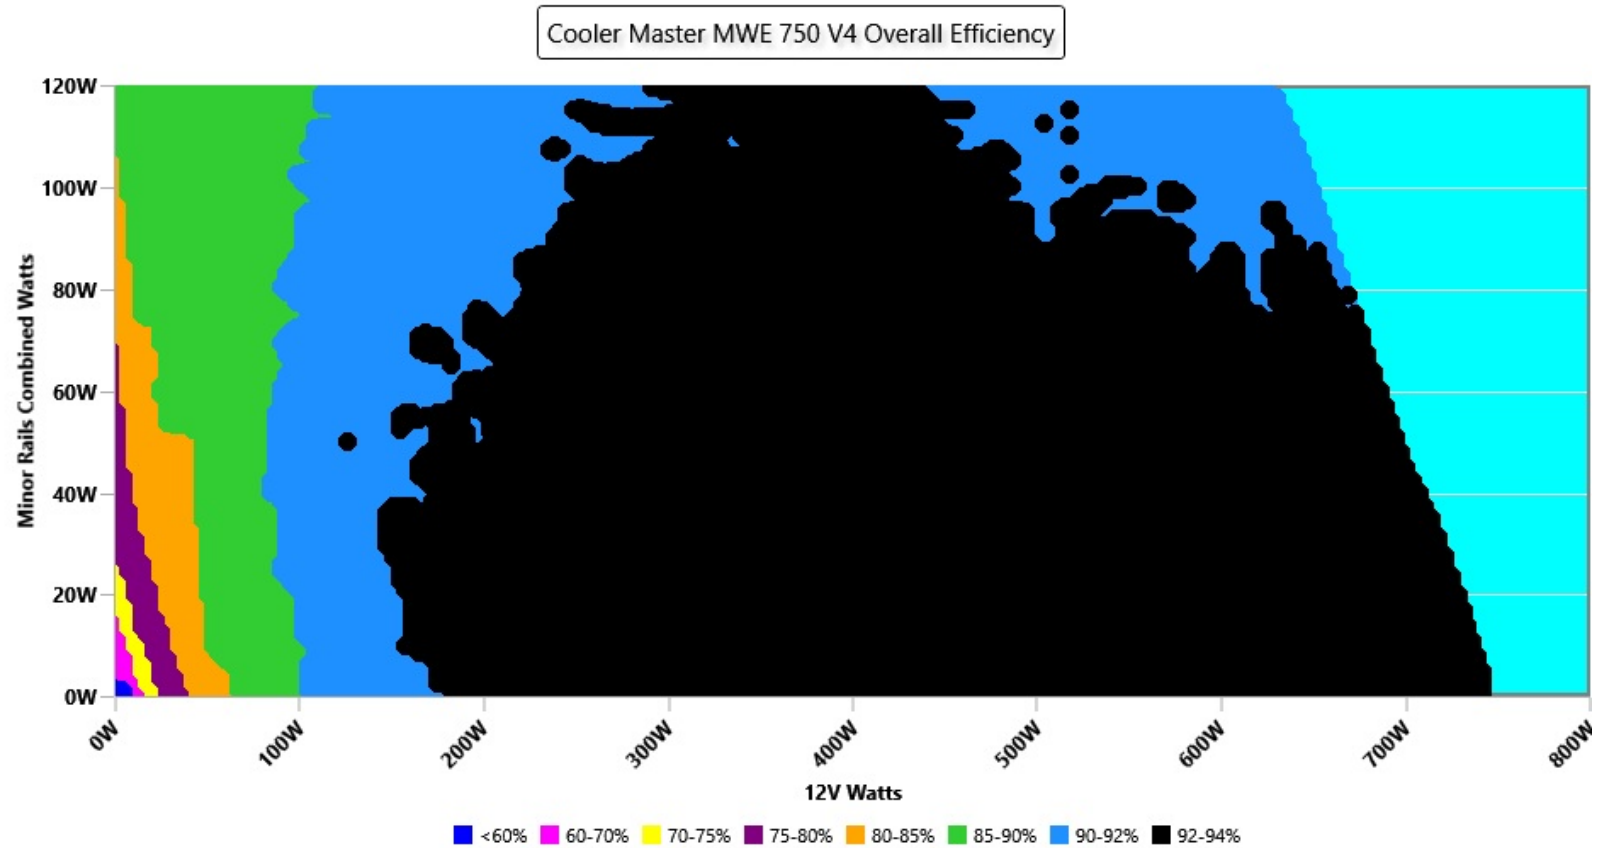


INFO

This graph depicts the PSU's efficiency throughout its entire operational range. For the generation of the efficiency and noise graphs we set our loaders to auto mode through our custom-made software before trying thousands of possible load combinations


Noise Graph

115V

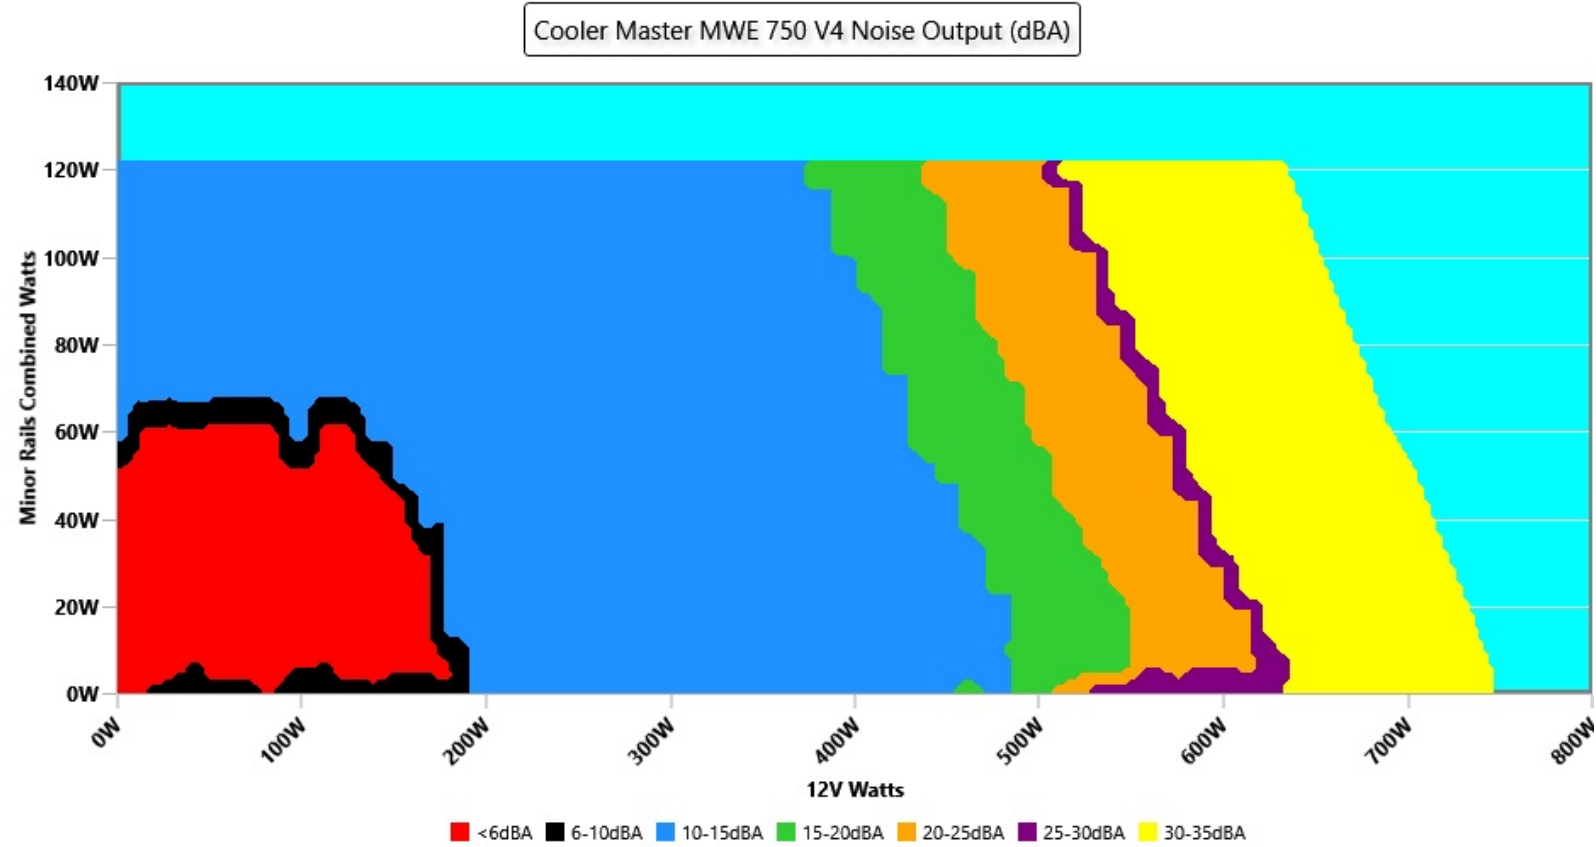

INFO

The PSU's noise in its entire operational range and under 30-32 °C ambient is depicted in this graph. The X axis represents the load on the +12V rail(s) while the Y axis is the load on the minor rails

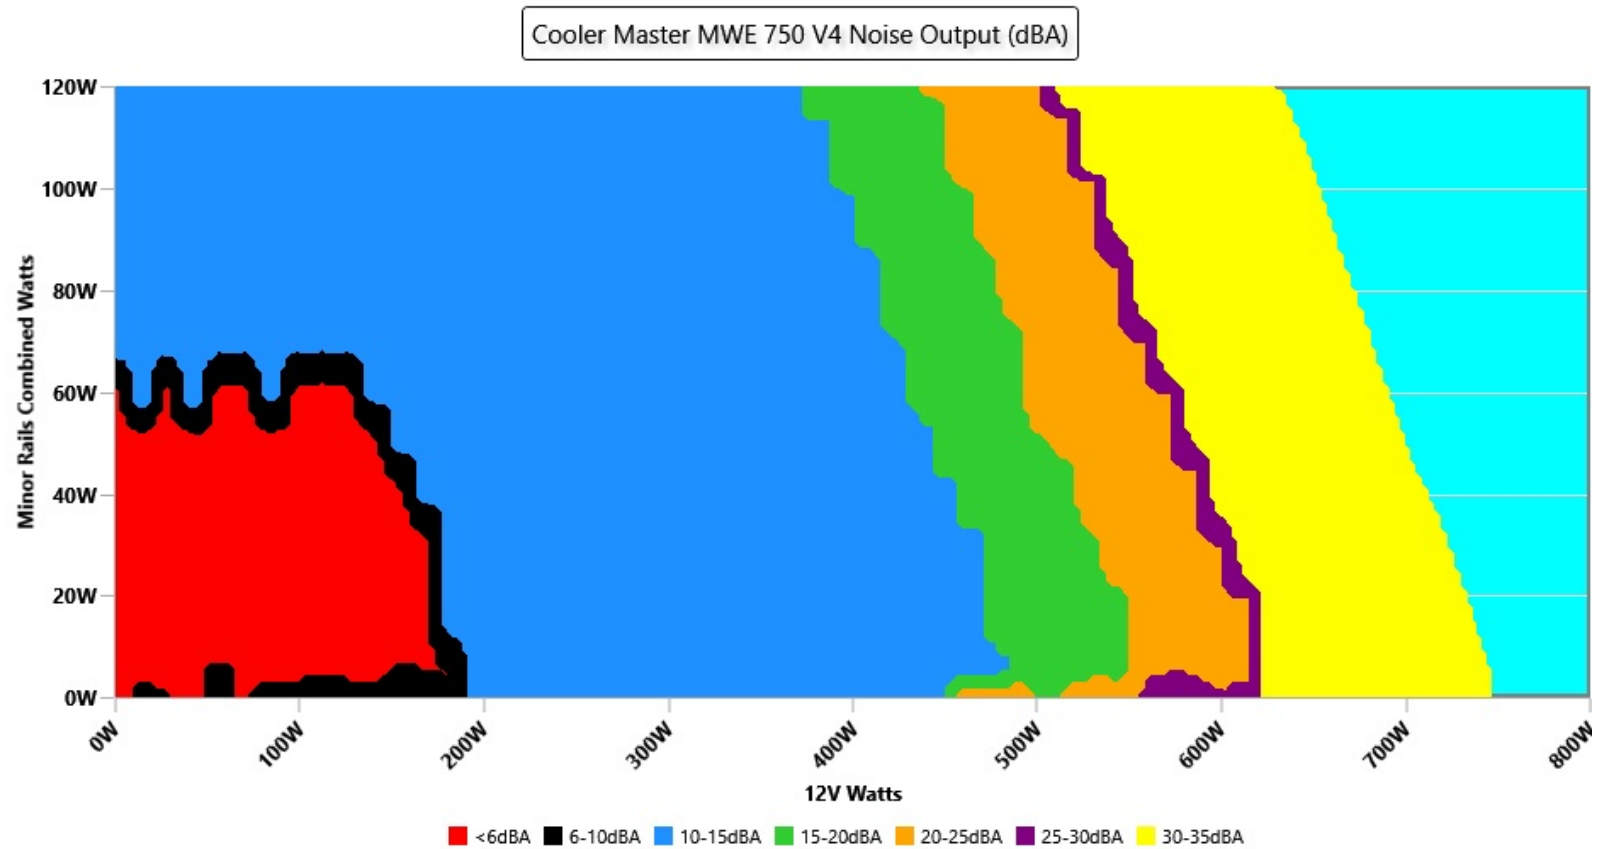


INFO


The PSU's noise in its entire operational range and under 30-32 °C ambient is depicted in this graph. The X axis represents the load on the +12V rail(s) while the Y axis is the load on the minor rails

Conducted Emissions EN 55032 & CISPR 32

Cooler Master MWE Gold 750 V4 (CM75003436) Neutral

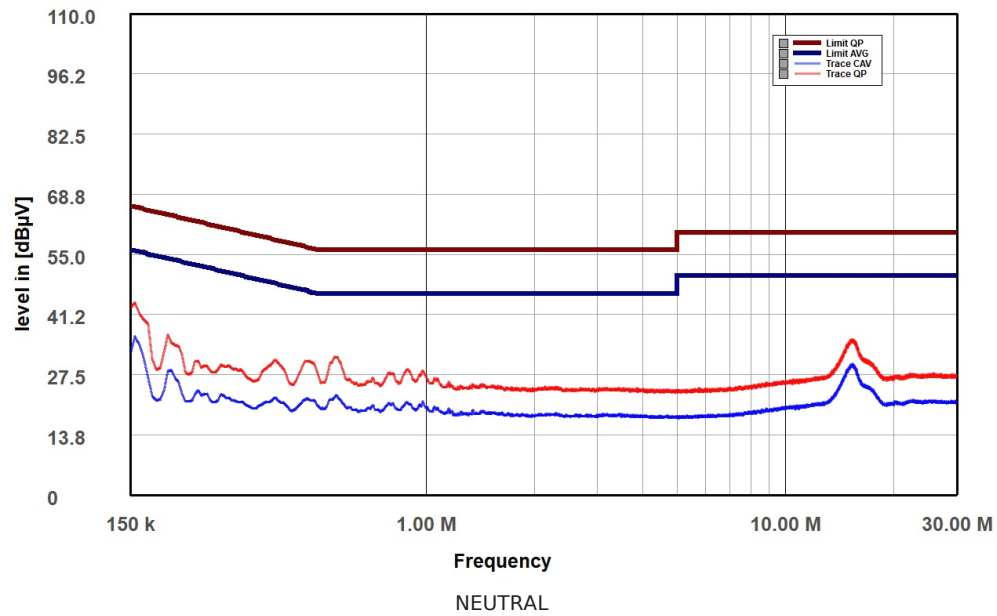


Cooler Master MWE Gold 750 V4 (CM75003436) Phase

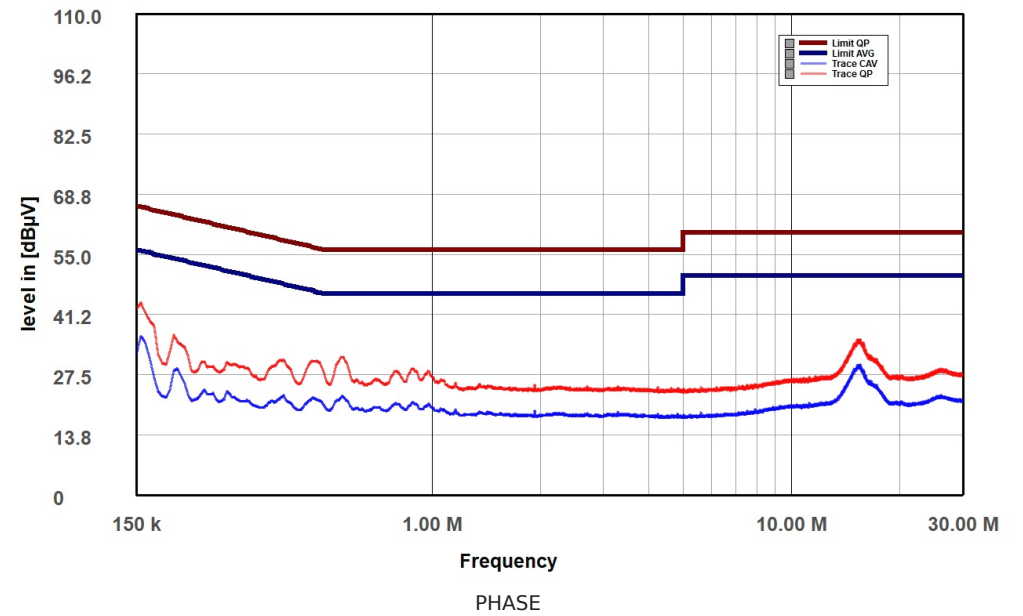

Indicative Performance


Efficiency under high ambient temperature

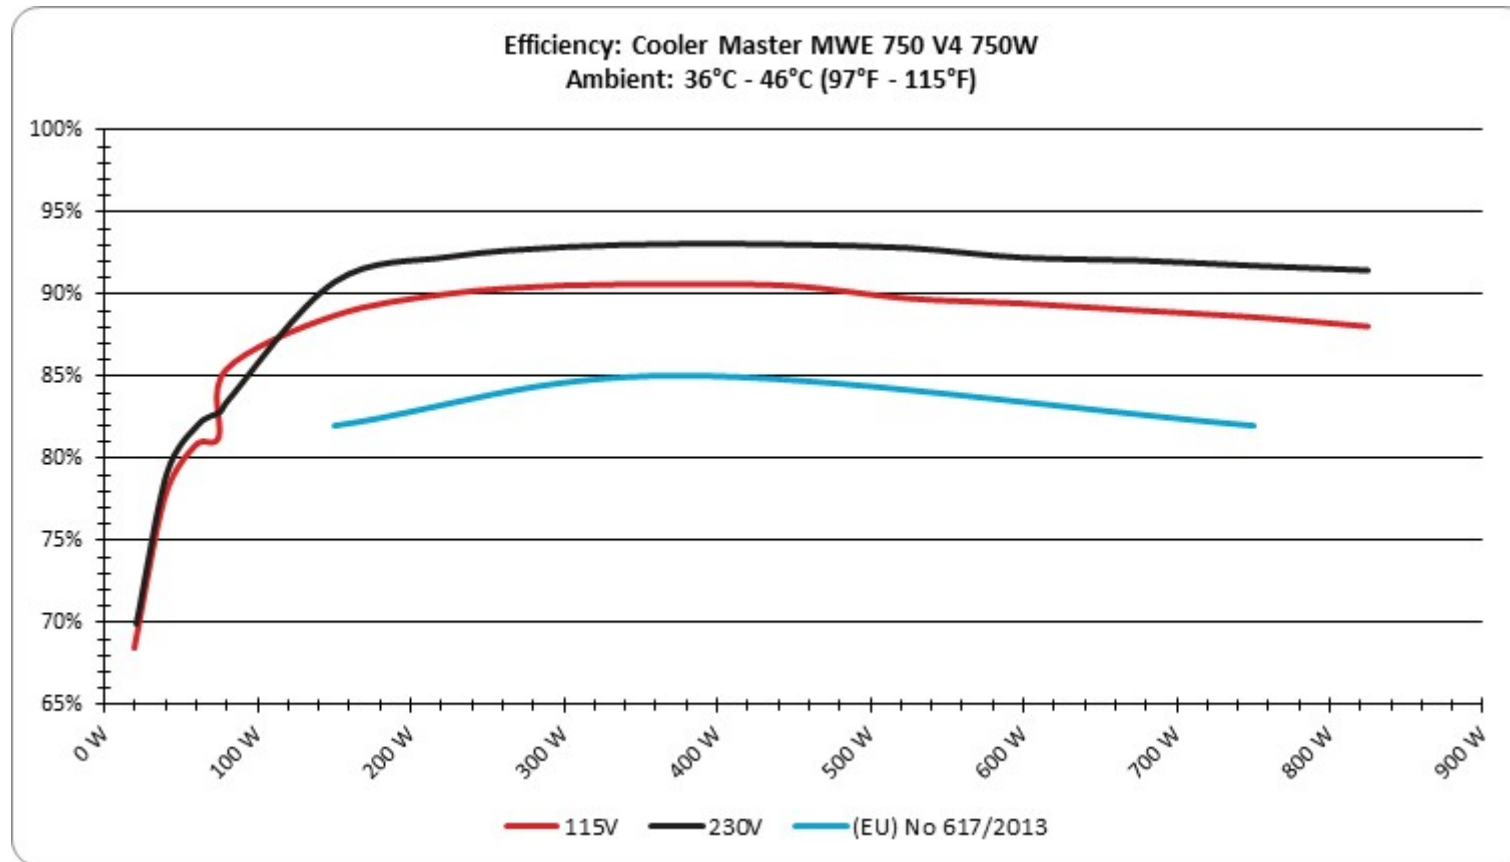

INFO

The PSU's efficiency under high ambient temperatures with 115V and 230V input. For this graph the results of the 10-110% load regulation table are used

5VSB Efficiency

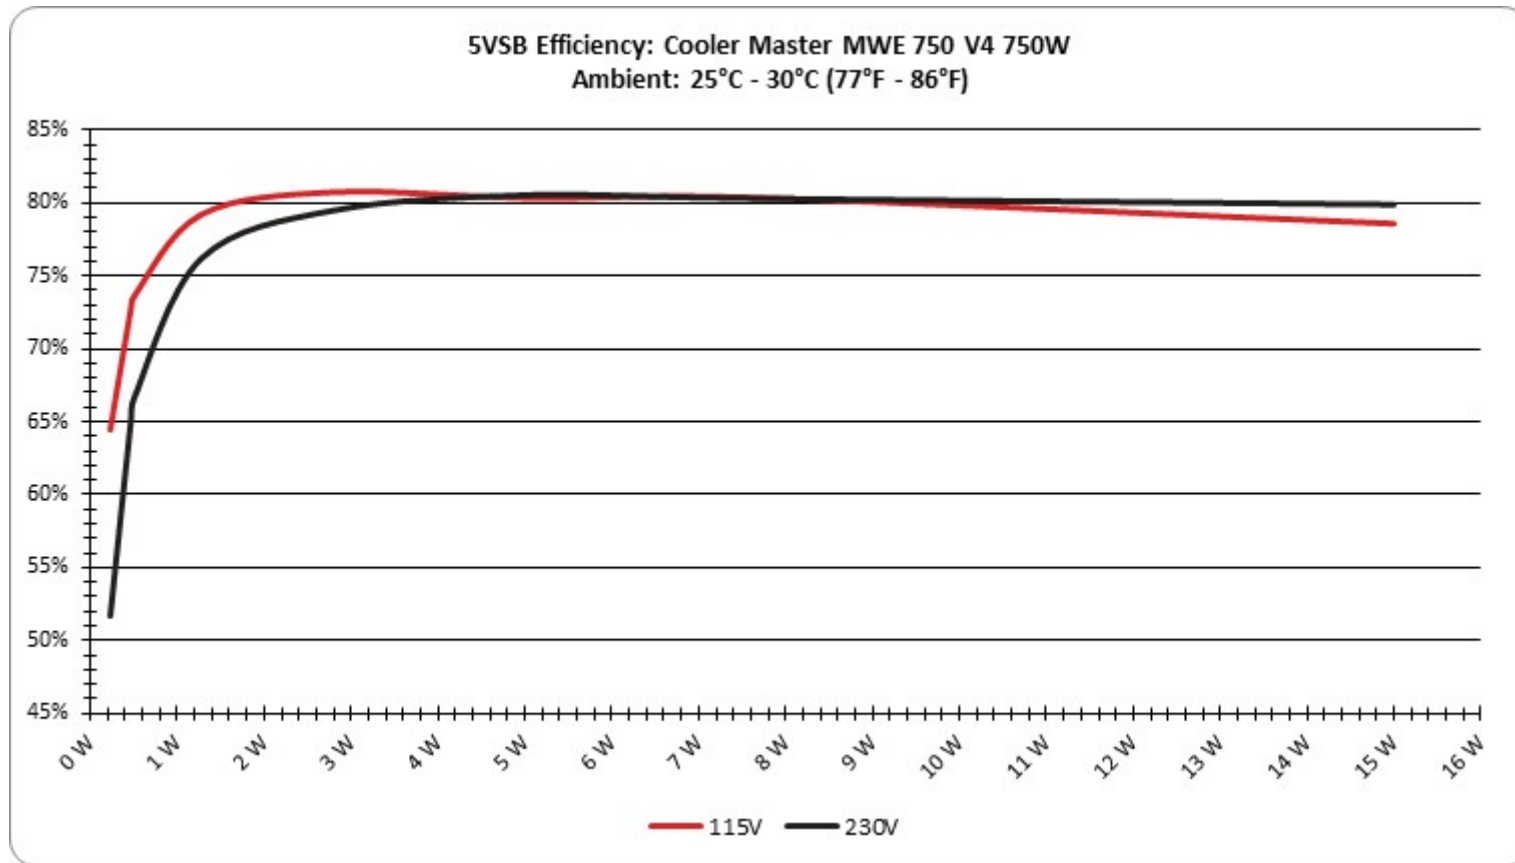

INFO

This graph depicts the efficiency levels of the 5VSB rail with 115V and 230V input

5VSB Efficiency (ERP LOT 3/6 & CEC)

115V

Test #	5VSB	DC/AC (Watts)	Efficiency	PF/AC Volts
1	0.045A	0.231W	64.387%	0.021
	5.129V	0.359W		114.93V
2	0.09A	0.462W	72.508%	0.037
	5.127V	0.636W		114.93V
3	0.55A	2.81W	80.746%	0.181
	5.107V	3.48W		114.92V
4	1A	5.09W	80.325%	0.285
	5.088V	6.336W		114.92V
5	1.5A	7.602W	80.376%	0.357
	5.066V	9.458W		114.93V
6	3.001A	15.006W	78.571%	0.465
	5.001V	19.099W		114.93V

230V

Test #	5VSB	DC/AC (Watts)	Efficiency	PF/AC Volts
1	0.045A	0.231W	51.701%	0.008
	5.13V	0.447W		230V
2	0.09A	0.462W	64.711%	0.012
	5.127V	0.713W		230V
3	0.55A	2.81W	79.443%	0.06
	5.107V	3.537W		229.99V
4	1A	5.09W	80.491%	0.105
	5.088V	6.323W		229.99V
5	1.501A	7.601W	80.255%	0.151
	5.066V	9.471W		229.99V
6	3.001A	15.003W	79.839%	0.255
	5V	18.791W		229.99V

Protection Features

OCP (Normal @ 29.2°C)	12V: 70.900A (113.44%), 11.989V — shut down 5V: 24.100A (120.50%), 5.147V — shut down 3.3V: 23.800A (119.00%), 3.439V — shut down 5VSB: 4.300A (143.33%), 4.869V — shut down
OCP (Hot @ 42.9°C)	12V: 70.900A (113.44%), 11.986V — shut down 5V: 24.200A (121.00%), 5.166V — shut down 3.3V: 23.800A (119.00%), 3.450V — shut down 5VSB: 4.300A (143.33%), 4.865V — shut down
OVP (per rail)	12V: 13.740V (✓) 5V: 5.900V (✓) 3.3V: 3.930V (✓)
OPP (Normal @ 28.5°C)	968.82W (129.18%) — shut down
OPP (Hot @ 42.4°C)	968.81W (129.17%) — shut down
OTP	✓ (100°C @ 12V Heatsink)
SCP	12V to Earth: ✓ 5V to Earth: ✓ 3.3V to Earth: ✓ 5VSB to Earth: ✓ -12V to Earth: ✓
PWR_OK	Proper Operation
UVP (Typical Load @ 90V)	✓
UVP (No Damage @ 80V)	✓
Conducted Emissions EN 55032 & CISPR 32	✓
NLO	✓
Fan Failure Protection	✗
SIP	Surge: MOV Inrush: NTC & Bypass Relay

Supplementary Tests (For Reference)

Typical Load Tests

115V

Test	12V	5V	3.3V	5VSB	DC/AC (Watts)	Efficiency	Fan Speed (RPM)	PSU Noise (dB[A])	Temps (In/Out)	PF/AC Volts
10%	4.423A	1.994A	2.003A	0.984A	74.997	81.314%	598	6.9	40.01°C	0.933
	12.073V	5.017V	3.295V	5.083V	92.231				41.11°C	114.96V
20%	9.869A	2.99A	3.003A	1.184A	149.941	88.733%	594	6.9	40.98°C	0.96
	12.062V	5.017V	3.297V	5.069V	168.98				42.67°C	114.94V
30%	15.671A	3.489A	3.505A	1.385A	224.944	90.085%	801	12.6	41.3°C	0.986
	12.054V	5.016V	3.295V	5.056V	249.702				43.79°C	114.93V
40%	21.485A	3.989A	4.007A	1.587A	300.029	90.584%	799	12.6	41.9°C	0.995
	12.047V	5.015V	3.294V	5.042V	331.218				43.08°C	114.91V
50%	26.914A	4.984A	5.006A	1.79A	374.526	90.654%	907	16.5	42.68°C	0.998
	12.039V	5.017V	3.296V	5.028V	413.136				44.79°C	114.89V
60%	32.386A	5.98A	6.005A	1.995A	449.461	90.564%	1138	23.8	42.55°C	0.998
	12.031V	5.018V	3.298V	5.014V	496.292				44.87°C	114.87V
70%	37.876A	6.98A	7.005A	2.2A	524.414	89.803%	1768	36.6	43.4°C	0.998
	12.021V	5.016V	3.298V	5V	583.96				45.35°C	114.84V
80%	43.430A	7.969A	8A	2.305A	599.629	89.485%	1771	37.0	43.98°C	0.999
	12.013V	5.019V	3.3V	4.989V	670.089				49.58°C	114.81V
90%	49.322A	8.473A	8.49A	2.41A	674.638	89.075%	2137	42.3	43.7°C	0.998
	12.006V	5.016V	3.298V	4.98V	757.381				48.24°C	114.79V
100%	55.012A	8.975A	9.011A	3.033A	749.793	88.66%	2146	42.8	44.97°C	0.999
	11.999V	5.013V	3.295V	4.947V	845.803				49.82°C	114.77V
110%	60.574A	9.975A	10.1A	3.036A	824.796	88.09%	2462	47.3	45.15°C	0.999
	11.993V	5.012V	3.297V	4.942V	936.067				48.81°C	114.75V
CL1	0.116A	14.227A	14.188A	0A	121.285	83.499%	779	11.5	40.89°C	0.954
	12.066V	5.075V	3.361V	5.116V	145.252				45.36°C	114.94V

Test	12V	5V	3.3V	5VSB	DC/AC (Watts)	Efficiency	Fan Speed (RPM)	PSU Noise (dB[A])	Temps (In/Out)	PF/AC Volts
CL2	0.115A	19.48A	0A	0A	101.39	81.919%	778	11.5	40.56°C	0.949
	12.072V	5.133V	3.266V	5.122V	123.768				44.64°C	114.94V
CL3	0.116A	0A	19.288A	0A	67.406	73.983%	777	11.5	40.79°C	0.933
	12.073V	4.987V	3.421V	5.12V	91.11				43.38°C	114.94V
CL4	62.495A	0A	0.001A	0A	749.692	89.316%	2081	42.7	45.18°C	0.999
	11.996V	4.977V	3.253V	5.092V	839.373				51.25°C	114.76V

The results above are not used in the certification process

230V

Test	12V	5V	3.3V	5VSB	DC/AC (Watts)	Efficiency	Fan Speed (RPM)	PSU Noise (dB[A])	Temps (In/Out)	PF/AC Volts
10%	4.424A	1.994A	2.004A	0.984A	75.007	82.857%	777	11.5	40.45°C	0.724
	12.073V	5.017V	3.295V	5.082V	90.526				44.48°C	230.02V
20%	9.871A	2.99A	3.004A	1.184A	149.962	90.778%	777	11.5	40.99°C	0.863
	12.061V	5.018V	3.296V	5.068V	165.195				44.65°C	230.03V
30%	15.673A	3.49A	3.506A	1.385A	224.962	92.298%	800	12.6	41.17°C	0.919
	12.053V	5.016V	3.295V	5.055V	243.736				44.48°C	230.04V
40%	21.487A	3.988A	4.007A	1.587A	300.044	92.888%	801	12.6	41.71°C	0.945
	12.046V	5.016V	3.294V	5.042V	323.018				45.92°C	230.05V
50%	26.918A	4.984A	5.007A	1.791A	374.559	93.075%	906	16.5	42.23°C	0.964
	12.039V	5.017V	3.296V	5.027V	402.427				46.73°C	230.04V
60%	32.388A	5.981A	6.007A	1.995A	449.479	93.039%	1139	23.8	42.77°C	0.973
	12.031V	5.017V	3.297V	5.013V	483.107				46.94°C	230.04V
70%	37.867A	6.977A	7.006A	2.201A	524.413	92.831%	1768	36.6	43.24°C	0.981
	12.024V	5.018V	3.297V	4.999V	564.914				47.25°C	230.03V
80%	43.430A	7.971A	8.003A	2.305A	599.605	92.241%	1767	36.6	43.67°C	0.985
	12.013V	5.018V	3.298V	4.99V	650.045				47.4°C	230.03V
90%	49.322A	8.474A	8.493A	2.41A	674.619	92.067%	2136	42.3	44.08°C	0.989
	12.006V	5.016V	3.296V	4.981V	732.749				47.18°C	230.02V

Test	12V	5V	3.3V	5VSB	DC/AC (Watts)	Efficiency	Fan Speed (RPM)	PSU Noise (dB[A])	Temps (In/Out)	PF/AC Volts
100%	55.027A	8.972A	9.01A	3.033A	749.847	91.751%	2140	42.3	45.29°C	0.991
	11.997V	5.015V	3.296V	4.946V	817.26				49.67°C	230.01V
110%	60.608A	9.968A	10.097A	3.036A	824.883	91.466%	2137	42.3	46.07°C	0.993
	11.988V	5.016V	3.297V	4.941V	901.843				49.8°C	229.99V
CL1	0.116A	14.224A	14.187A	0A	121.286	85.232%	780	11.5	40.89°C	0.838
	12.066V	5.076V	3.362V	5.116V	142.301				46.93°C	230.09V
CL2	0.115A	19.483A	0A	0A	101.389	83.766%	777	11.5	40.51°C	0.801
	12.071V	5.133V	3.266V	5.122V	121.039				45.06°C	230.09V
CL3	0.116A	0A	19.292A	0A	67.405	75.521%	777	11.5	41.17°C	0.72
	12.073V	4.988V	3.421V	5.121V	89.253				45.27°C	230.09V
CL4	62.494A	0A	0.001A	0A	749.654	92.506%	2136	42.3	45.47°C	0.991
	11.996V	4.977V	3.253V	5.092V	810.38				47.49°C	230.02V

The results above are not used in the certification process

Light Load Tests

115V

Test	12V	5V	3.3V	5VSB	DC/AC (Watts)	Efficiency	Fan Speed (RPM)	PSU Noise (dB[A])	Temps (In/Out)	PF/AC Volts
20W	1.229A	0.499A	0.501A	0.195A	19.998	68.443%	0	<6.0	46.22°C	0.761
	12.080V	5.01V	3.29V	5.122V	29.218				36.21°C	114.97V
40W	2.706A	0.699A	0.702A	0.293A	39.996	77.697%	0	<6.0	49.76°C	0.877
	12.078V	5.01V	3.29V	5.116V	51.476				37.05°C	114.97V
60W	4.184A	0.898A	0.902A	0.391A	59.994	80.838%	0	<6.0	53.31°C	0.915
	12.075V	5.01V	3.291V	5.111V	74.214				38.88°C	114.97V
80W	5.660A	1.098A	1.104A	0.49A	79.944	85.456%	492	7.1	39.96°C	0.933
	12.071V	5.01V	3.288V	5.105V	93.55				41.68°C	114.96V

The results above are not used in the certification process

230V

Test	12V	5V	3.3V	5VSB	DC/AC (Watts)	Efficiency	Fan Speed (RPM)	PSU Noise (dB[A])	Temps (In/Out)	PF/AC Volts
20W	1.240A	0.5A	0.5A	0.2A	20.158	69.945%	0	<6.0	45.83°C	0.378
	12.080V	5.013V	3.29V	5.122V	28.82				36.06°C	230.07V
40W	2.720A	0.7A	0.7A	0.3A	40.199	79.146%	0	<6.0	46.3°C	0.542
	12.078V	5.014V	3.29V	5.116V	50.791				37.13°C	230.08V
61W	4.224A	0.9A	0.9A	0.4A	60.518	82.074%	283	<6.0	38.72°C	0.661
	12.075V	5.012V	3.29V	5.11V	73.735				41.83°C	230.09V
81W	5.704A	1.1A	1.1A	0.5A	80.54	83.616%	776	11.5	39.09°C	0.742
	12.072V	5.012V	3.29V	5.105V	96.321				43.86°C	230.1V

The results above are not used in the certification process

Ripple Measurements

115V

Test	12V	5V	3.3V	5VSB	Pass/Fail
10% Load	52.77mV	16.07mV	14.40mV	17.42mV	Pass
20% Load	15.88mV	13.98mV	11.44mV	18.70mV	Pass
30% Load	15.93mV	15.61mV	12.21mV	19.71mV	Pass
40% Load	17.04mV	17.50mV	13.63mV	20.33mV	Pass
50% Load	20.46mV	16.58mV	14.55mV	19.82mV	Pass
60% Load	22.54mV	16.43mV	15.16mV	19.61mV	Pass
70% Load	22.90mV	19.39mV	18.51mV	20.63mV	Pass
80% Load	26.41mV	18.67mV	20.19mV	20.48mV	Pass
90% Load	27.99mV	39.84mV	25.64mV	22.57mV	Pass
100% Load	29.15mV	20.66mV	22.74mV	21.40mV	Pass
110% Load	32.62mV	21.88mV	24.56mV	22.16mV	Pass
Crossload1	14.91mV	14.44mV	16.02mV	17.17mV	Pass
Crossload2	14.40mV	14.54mV	11.65mV	17.32mV	Pass

Test	12V	5V	3.3V	5VSB	Pass/Fail
Crossload3	32.06mV	14.08mV	19.58mV	18.49mV	Pass
Crossload4	30.99mV	18.92mV	18.87mV	22.77mV	Pass

The results above are not used in the certification process

230V

Test	12V	5V	3.3V	5VSB	Pass/Fail
10% Load	14.83mV	13.42mV	13.99mV	17.32mV	Pass
20% Load	15.16mV	12.70mV	11.49mV	17.83mV	Pass
30% Load	16.53mV	15.10mV	12.10mV	19.71mV	Pass
40% Load	17.66mV	16.22mV	13.17mV	19.26mV	Pass
50% Load	20.25mV	16.22mV	13.79mV	19.82mV	Pass
60% Load	23.51mV	20.55mV	21.51mV	19.31mV	Pass
70% Load	26.36mV	17.44mV	15.97mV	19.41mV	Pass
80% Load	24.47mV	18.00mV	21.97mV	20.07mV	Pass
90% Load	30.55mV	17.99mV	22.97mV	32.45mV	Pass
100% Load	31.45mV	20.40mV	23.91mV	21.96mV	Pass
110% Load	33.48mV	22.09mV	24.87mV	22.62mV	Pass
Crossload1	15.21mV	14.18mV	18.31mV	17.27mV	Pass
Crossload2	16.13mV	14.03mV	13.53mV	16.61mV	Pass
Crossload3	32.01mV	12.70mV	19.22mV	17.32mV	Pass
Crossload4	29.72mV	18.57mV	18.01mV	22.32mV	Pass

The results above are not used in the certification process

[illegible]PHI