

GIGABYTE™

Gigabyte Aorus 850


Serial Number SN18273G003569

Lab ID 467

Certification ID 25467

Test Result Report ID:

Certificate Issue Date: Aug 27, 2018

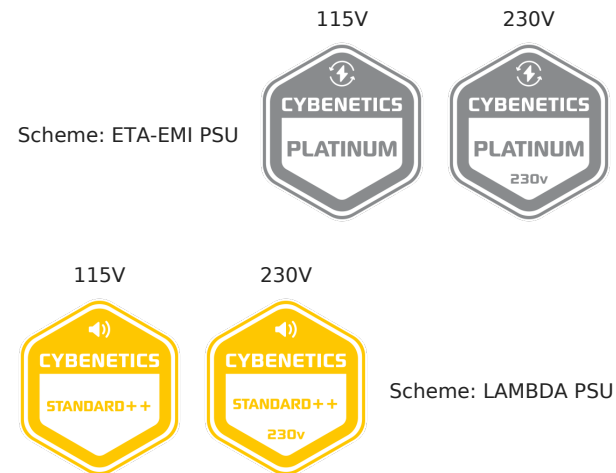

Aristeidis Bitziopoulos, Certification Body General Manager

General Information

Test Equipment

Electronic Loads	Chroma 63601-5 x2 Chroma 63600-2 Chroma 63640-80-80 x10 Chroma 63610-80-20
AC Sources	Chroma 6530, APM SP300VAC4000W-P, GW Instek ASR-3500
Power Analyzers	Rohde & Schwarz HMC8015 & NPA701
Oscilloscopes	Picoscope 4444, Siglent SDS2104X PLUS
Sound Analyzer	Bruel & Kjaer 2270 G4
Microphone	Bruel & Kjaer Type 4955-A
Temperature Logger	Picoscope TC-08
Tachometer	UNI-T UT372
Multimeters	Keysight 34465A
EMI Analyzer	TekBox TBMR-110M-EU
Isolation Transformer	4kVA
UPS	FSP Champ Tower 3kVA, CyberPower OLS3000E 3kVA
Testing Methodology	Cybenetics PSU Test Protocol

DUT Information(Non-accredited measurements)

Product Identification Details	
Brand	Gigabyte
Model	Aorus 850
OEM/ODM	MEIC
Serial Number	SN18273G003569
Product Specifications	
Manufacturer-Provided Information	
Rated Voltage (Vrms)	100-240
Rated Current (Arms)	12-6
Rated Frequency (Hz)	50-60

Rated Power (W)	850
Operating Temperature (Continuous Full Load) (°C)	
Type	ATX12V
Cable Design	Fully Modular
Warranty	-
Cybenetics Measurements	
Dimensions (W x H x D)	
Weight	
Cooling	135mm Double Ball Bearing Fan (D14BH-12)
Semi-Passive Operation	✓
Cybenetics Testing Information	
Lab ID	467
Date of receipt	Aug 13, 2018
Testing Date	Aug 23, 2018
Report Issued Date	Aug 27, 2018
Engineer Name	-
Authorized By the Laboratory Technical Manager	Aristeidis Bitziopoulos
Signature	

Cables and Connectors(Non-accredited measurements)

Modular Cables				
Description	Cable Count	Connector Count (Total)	Gauge	In Cable Capacitors
ATX connector 20+4 pin (660mm)	1	1	16-22AWG	Yes
4+4 pin EPS12V (800mm)	1	1	18AWG	Yes
4+4 pin EPS12V (650mm)	1	1	18AWG	Yes
6+2 pin PCIe (750mm)	2	2	18AWG	Yes
6+2 pin PCIe (650mm+150mm)	2	4	18AWG	Yes
SATA (550mm+100mm+100mm)+4-pin Molex (+100mm)	1	3 / 1	18AWG	No
SATA (460mm+100mm+100mm)+4-pin Molex (+100mm)	1	3 / 1	18AWG	No
4-pin Molex (450mm+100mm+100mm)+FDD (+100mm)	1	3 / 1	18-22AWG	No

FDD Adapter (+105mm)	1	1	22AWG	No
AC Power Cord (1400mm) - C13 coupler	1	1	16AWG	-

Power Specifications

Rail		3.3V	5V	12V	5VSB	-12V
Max. Power	Amps	20	20	70.5	3	0.3
	Watts	120		846	15	3.6
Total Max. Power (W)		850				

Parts Description

General Data	
Manufacturer (OEM)	MEIC
Primary Side	
Transient Filter	4x Y caps, 2x X caps, 2x CM chokes, 1x MOV, 1x CM02X
Inrush Protection	NTC Thermistor & Relay
Bridge Rectifier(s)	2x GBU1006 (600V, 10A @ 100°C)
APFC MOSFETS	2x Alpha & Omega AOT42S60 (600V, 25A @ 100°C, 0.28Ohm @ 150°C)
APFC Boost Diode	1x CREE C3D08060A (600V, 8A @ 152°C)
Hold-up Cap(s)	2x Nippon Chemi-Con (400V, 390uF, 2000h @ 105 °C, KMR)
Main Switchers	2x Alpha & Omega AOT42S60 (600V, 25A @ 100°C, 0.28Ohm @ 150°C)
APFC Controller	Champion CM6500UNX & CM03X Green PFC controller
LLC Resonant Controller	Champion CM6901
Topology	Primary side: Half-Bridge & LLC Resonant Controller Secondary side: Synchronous Rectification & DC-DC converters
Secondary Side	
+12V MOSFETS	4x Alpha & Omega AOT2142L (40V, 120A @ 100°C, 1.9mOhm)
5V & 3.3V	DC-DC Converters: 8x GV8G16 PWM Controller: 2x NCP1587
Filtering Capacitors	Electrolytics: Chemi-Con (1-5,000 @ 105°C, KZE), Chemi-Con (4-10,000h @ 105°C, KY) Polymers: Chemi-Con
Supervisor IC	Weltrend WT7527A (OVP, UVP, SCP, OCP, PG)
Fan Model	Yate Loon D14BH-12 (140mm, 12V, 0.70A, 2800 RPM, 140CFM, 48.5 dBA, Double-Ball Bearing)
5VSB Circuit	

Rectifier	1x TPD65R1K2C (650V, 4A @ 25°C, 1.2Ohm)
Standby PWM Controller	SI8016HSP8

Test Results

Temperature & Compliance Info

Temperature Range (°C /°F)	28-32 / 82.4-89.6
ErP Lot 3/6 Ready	✓
(EU) No 617/2013 Compliance	✓

Performance Summary

115V

Accredited	
Average Efficiency (>1450 load combinations)	89.708%
Average Noise Output (>1450 Load Combinations)	32.06dBA
Average PF (>1450 Load Combinations)	0.984
Efficiency With 10W (≤500W) or 2% (>500W) Load	62.829%
Standby Power Consumption	0.0239W
Non-Accredited	
12V Ripple (Full Load)	11.30mV
5V Ripple (Full Load)	14.36mV
3.3V Ripple (Full Load)	18.20mV
5VSB Ripple (Full Load)	10.31mV
12V Load Regulation	0.60%
5V Load Regulation	1.32%
3.3V Load Regulation	1.59%
5VSB Load Regulation	2.90%
Inrush Current	26.345A

230V

Accredited		
Average Efficiency (>1450 load combinations)	91.666%	
Average Noise Output (>1450 Load Combinations)	32.35dBA	
Average PF (>1450 Load Combinations)	0.945	
Efficiency With 10W (≤500W) or 2% (>500W) Load	-	
Standby Power Consumption	0.0372W	
Non-Accredited		
12V Ripple (Full Load)	10.20mV	
5V Ripple (Full Load)	13.90mV	
3.3V Ripple (Full Load)	13.98mV	
5VSB Ripple (Full Load)	7.71mV	
12V Load Regulation	0.60%	
5V Load Regulation	1.34%	
3.3V Load Regulation	1.65%	
5VSB Load Regulation	2.92%	
Inrush Current	58.961A	
Hold-Up Time & PWR_OK Signal	16.80ms	
AC Loss to PWR_OK Hold Up Time	15.60ms	
PWR_OK Inactive to DC Loss Delay	1.20ms	
OPP (0.00°C / 0.00°C)	-	-

Hold-Up Time & PWR_OK Signal


Hold-Up Time (ms)	16.8
AC Loss to PWR_OK Hold Up Time (ms)	15.6
PWR_OK Inactive to DC Loss Delay (ms)	1.2

Vampire Power

Graphs


115V

Power - SN18273G003569 - 22/08/2018 - 11:06

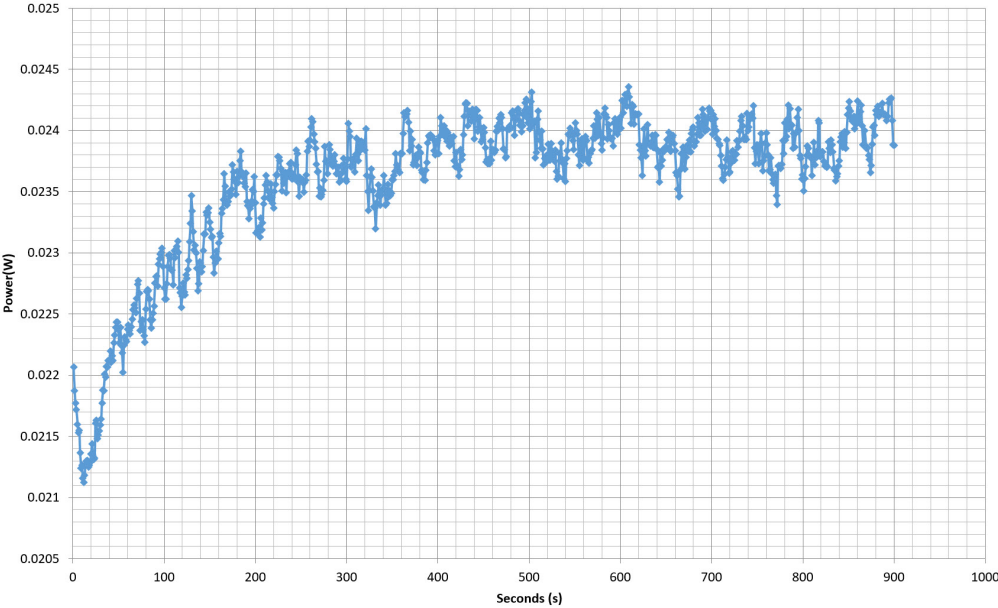


230V

Power - SN18273G003569 - 22/08/2018 - 11:06

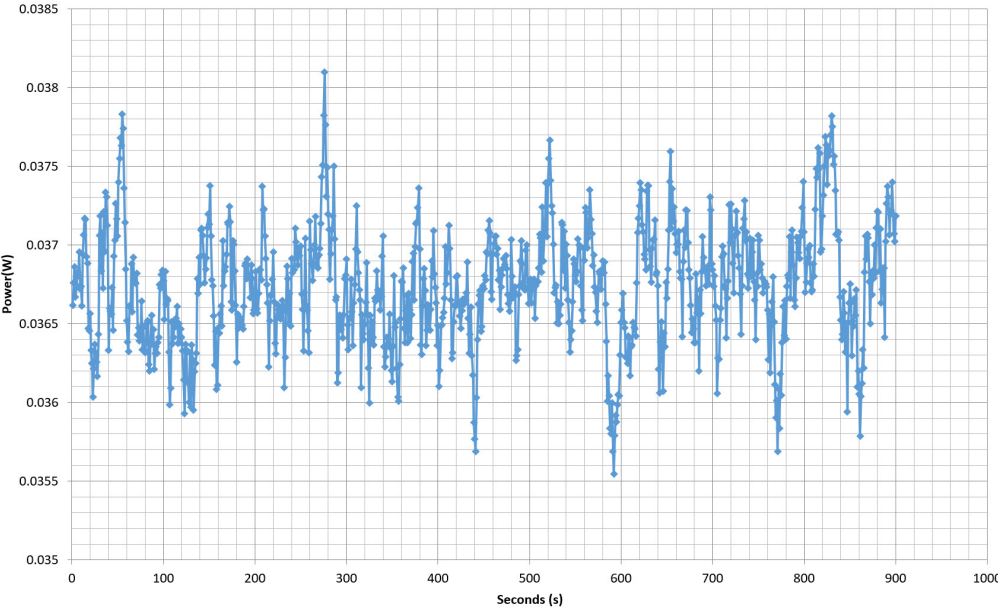

Efficiency Graph


115V

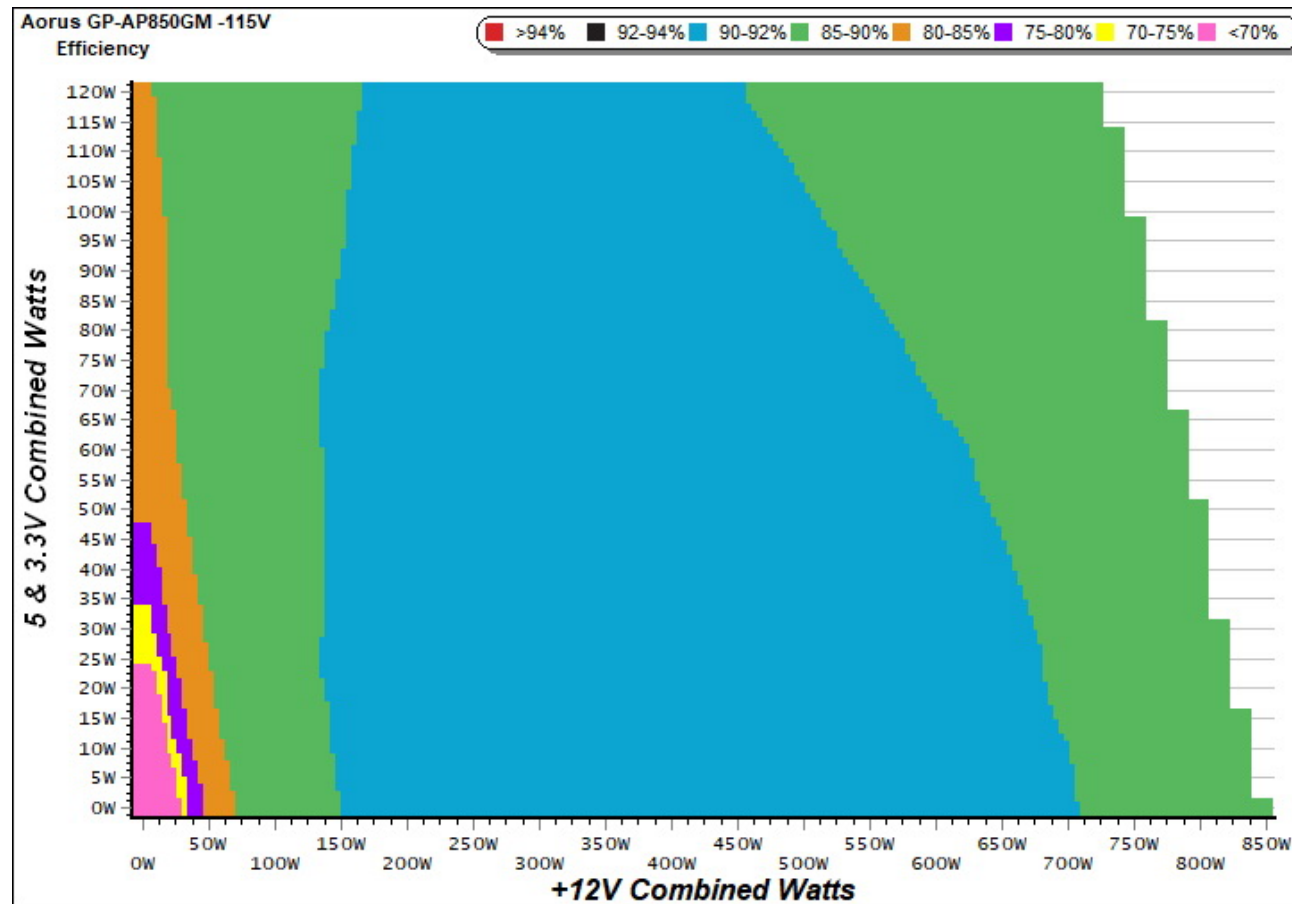

INFO

This graph depicts the PSU's efficiency throughout its entire operational range. For the generation of the efficiency and noise graphs we set our loaders to auto mode through our custom-made software before trying thousands of possible load combinations.

230V

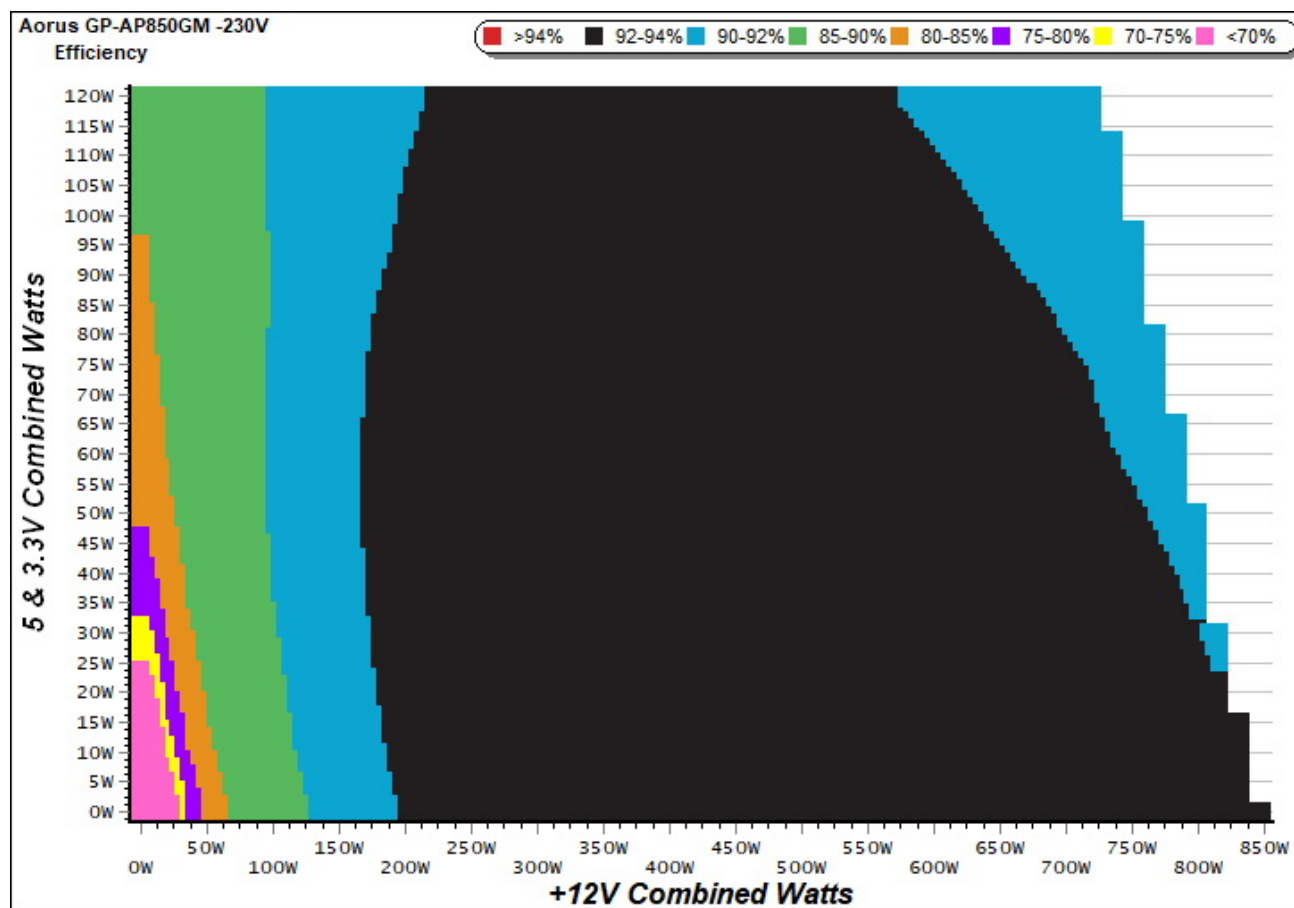


INFO

This graph depicts the PSU's efficiency throughout its entire operational range. For the generation of the efficiency and noise graphs we set our loaders to auto mode through our custom-made software before trying thousands of possible load combinations.

Noise Graph


115V

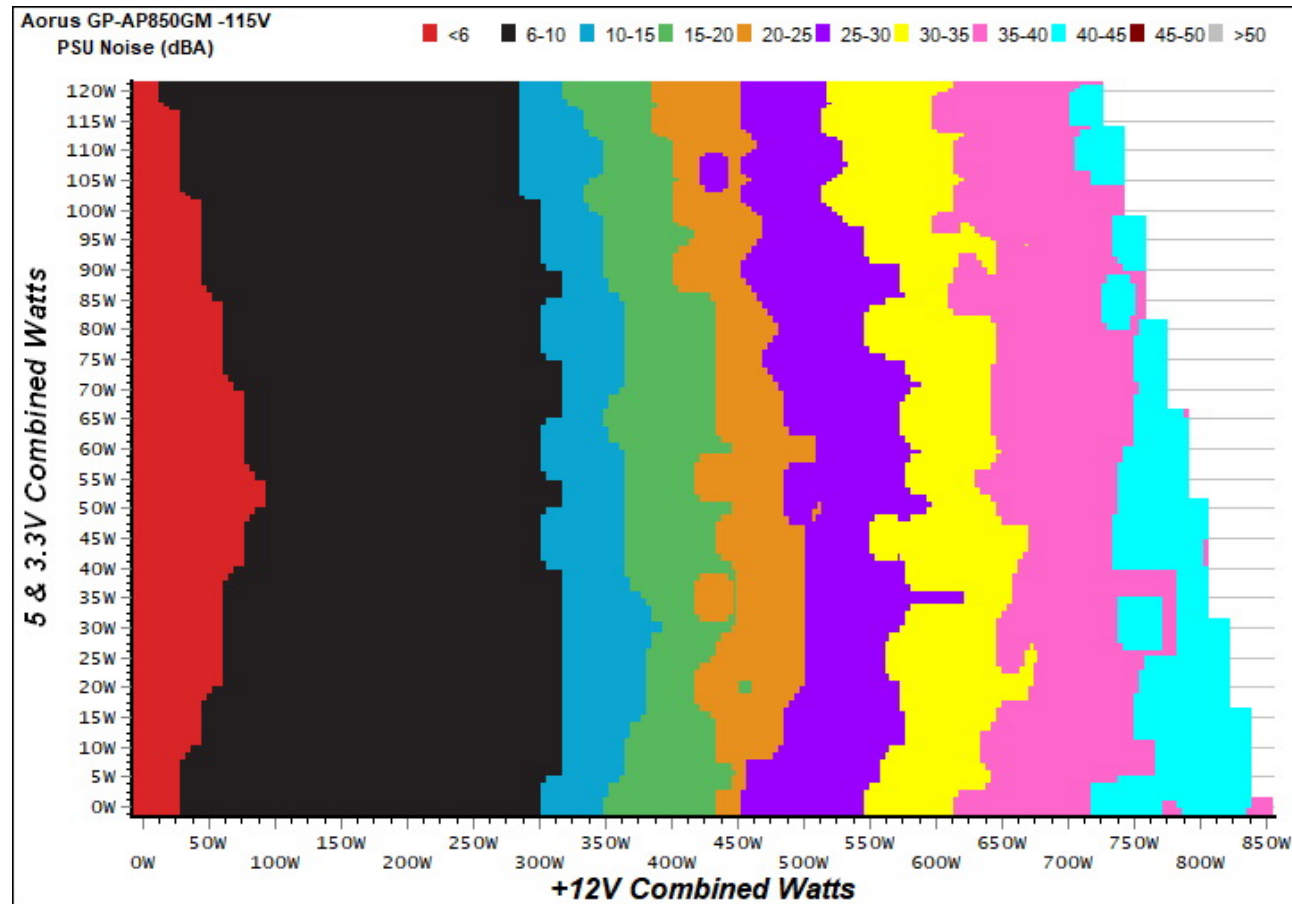

INFO

The PSU's noise in its entire operational range and under 30-32 °C ambient is depicted in this graph. The X axis represents the load on the +12V rail(s) while the Y axis is the load on the minor rails.

230V

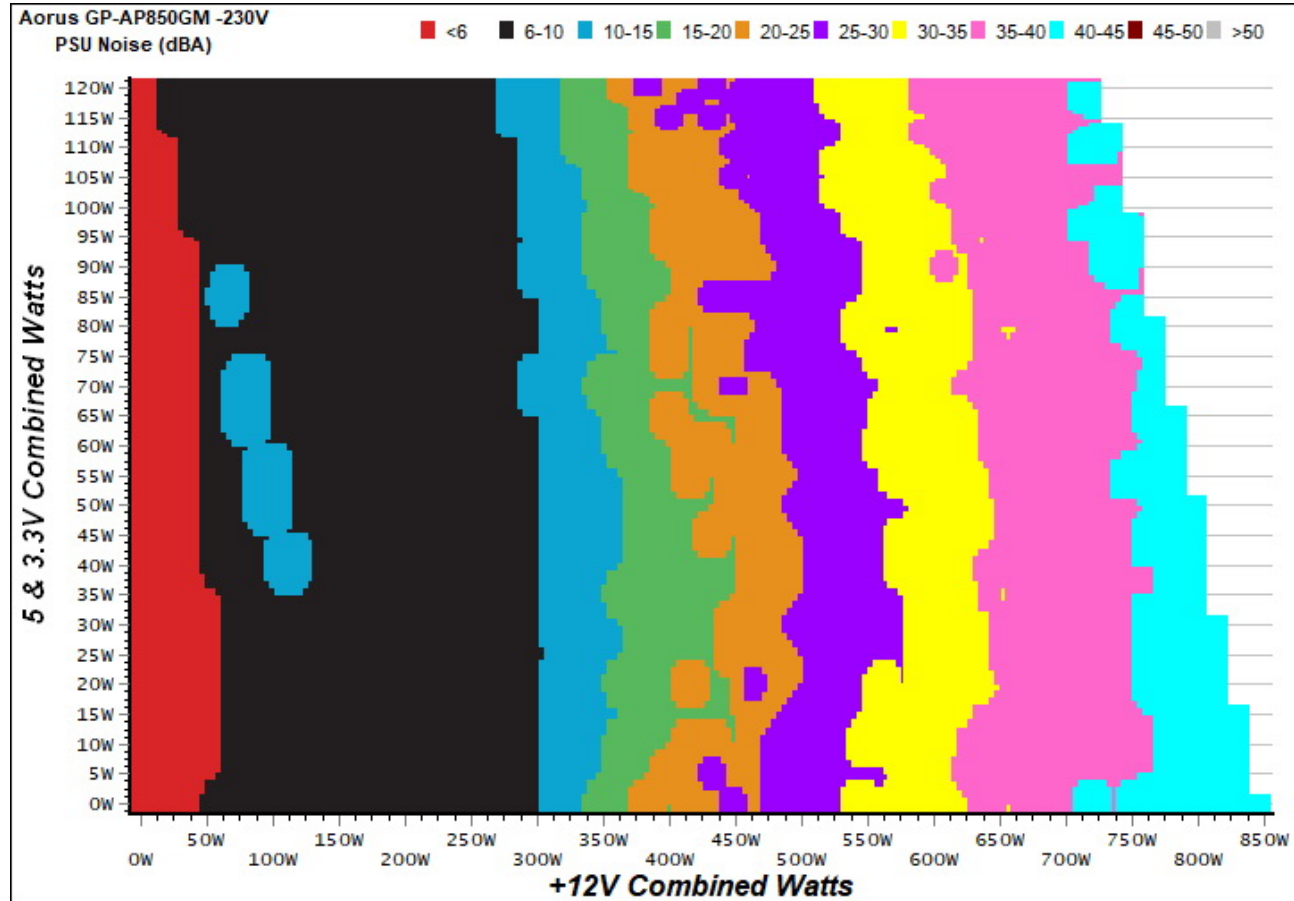

INFO


The PSU's noise in its entire operational range and under 30-32 °C ambient is depicted in this graph. The X axis represents the load on the +12V rail(s) while the Y axis is the load on the minor rails.

Indicative Performance

Efficiency under high ambient temperature

Efficiency: Aorus GP-AP850GM

Ambient: 37°C - 46°C (98.6°F - 114.8°F)

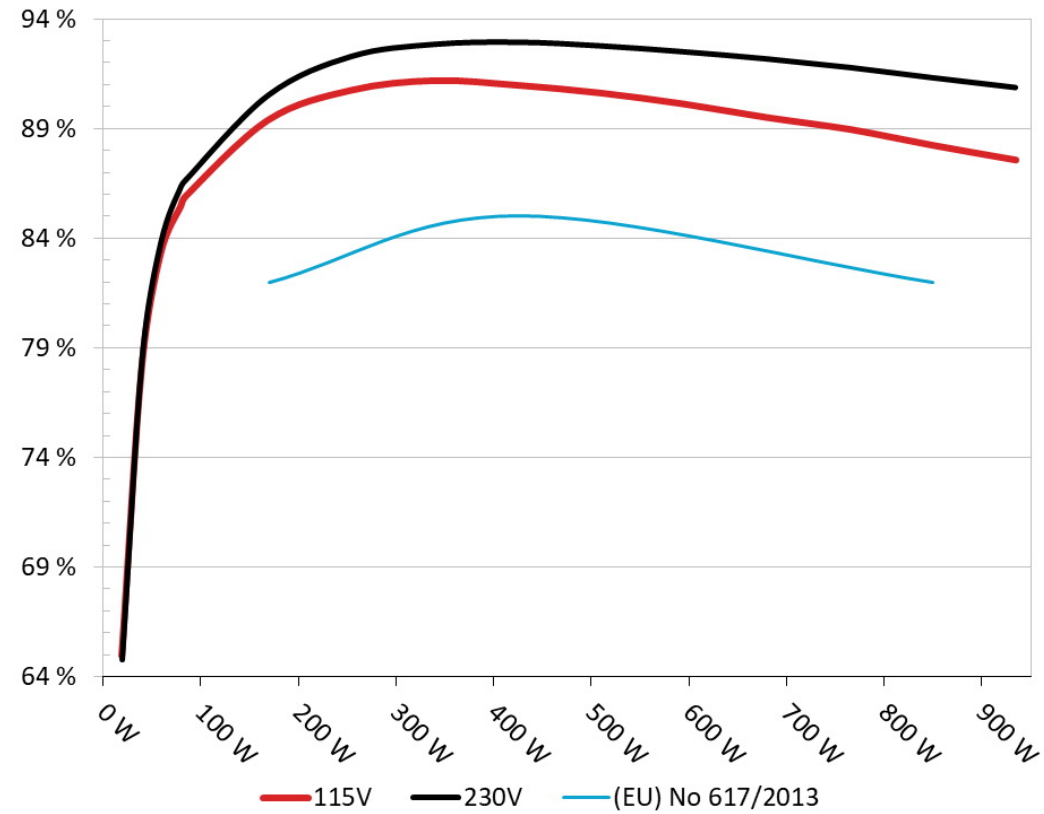


INFO

The PSU's efficiency under high ambient temperatures with 115V and 230V input. For this graph the results of the 10-110% load regulation table are used.

5VSB Efficiency

5VSB Efficiency: Aorus GP-AP850GM

Ambient: 34°C - 36°C (93.2°F - 96.8°F)

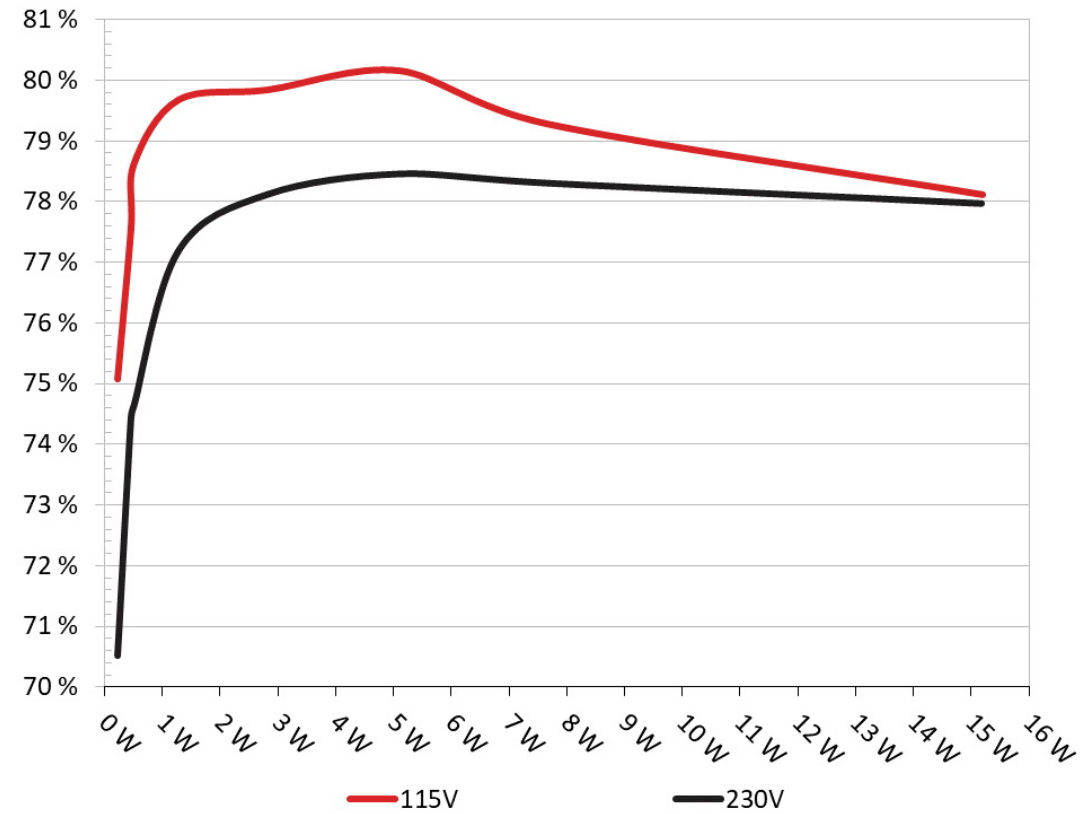

INFO

This graph depicts the efficiency levels of the 5VSB rail with 115V and 230V input.

5VSB Efficiency (ERP LOT 3/6 & CEC)

115V

Test #	5VSB	DC/AC (Watts)	Efficiency	PF/AC Volts
1	0.045A	0.232	75.081%	0.031
	5.149V	0.309		115.10V
2	0.090A	0.463	77.554%	0.058
	5.147V	0.597		115.10V
3	0.550A	2.824	79.842%	0.250
	5.135V	3.537		115.10V
4	1.000A	5.122	80.156%	0.331
	5.122V	6.390		115.10V
5	1.500A	7.661	79.282%	0.377
	5.107V	9.663		115.10V
6	3.000A	15.190	78.118%	0.437
	5.063V	19.445		115.10V

230V

Test #	5VSB	DC/AC (Watts)	Efficiency	PF/AC Volts
1	0.045A	0.232	70.517%	0.010
	5.149V	0.329		230.27V
2	0.090A	0.463	74.437%	0.018
	5.147V	0.622		230.27V
3	0.550A	2.824	78.119%	0.100
	5.134V	3.615		230.27V
4	1.000A	5.121	78.459%	0.166
	5.121V	6.527		230.27V
5	1.500A	7.660	78.307%	0.221
	5.106V	9.782		230.27V
6	3.000A	15.187	77.970%	0.315
	5.062V	19.478		230.27V

Supplementary Tests (For Reference)

Typical Load Tests

115V

Test #	12V	5V	3.3V	5VSB	DC/AC (Watts)	Efficiency	Fan Speed (RPM)	PSU Noise (dB[A])	Temps (In/Out)	PF/AC Volts
1	5.159A	1.968A	1.942A	0.978A	84.888	85.923%	0	<6.0	46.65°C	0.963
	12.267V	5.083V	3.398V	5.114V	98.796				40.33°C	115.12V
2	11.298A	2.959A	2.920A	1.176A	169.342	89.404%	532	14.2	40.77°C	0.983
	12.254V	5.071V	3.388V	5.101V	189.413				49.04°C	115.11V
3	17.828A	3.455A	3.399A	1.376A	254.476	90.768%	590	17.0	41.18°C	0.989
	12.255V	5.064V	3.382V	5.089V	280.358				51.70°C	115.11V
4	24.374A	3.955A	3.907A	1.576A	339.688	91.208%	765	24.2	41.91°C	0.987
	12.246V	5.058V	3.378V	5.077V	372.432				53.10°C	115.11V
5	30.606A	4.948A	4.894A	1.777A	425.015	90.992%	860	27.9	42.12°C	0.986
	12.237V	5.051V	3.371V	5.064V	467.092				54.28°C	115.35V
6	36.778A	5.950A	5.883A	1.980A	509.536	90.642%	1075	33.7	42.67°C	0.988
	12.228V	5.044V	3.366V	5.051V	562.141				55.19°C	115.11V
7	43.028A	6.950A	6.876A	2.184A	594.873	90.139%	1255	37.8	43.30°C	0.989
	12.219V	5.037V	3.360V	5.038V	659.951				56.06°C	115.10V
8	49.284A	7.954A	7.871A	2.388A	680.216	89.520%	1480	42.2	43.63°C	0.990
	12.211V	5.030V	3.354V	5.025V	759.846				57.20°C	115.11V
9	55.946A	8.463A	8.360A	2.391A	765.160	88.976%	1630	43.7	44.61°C	0.991
	12.202V	5.023V	3.349V	5.019V	859.963				58.82°C	115.09V
10	62.349A	8.972A	8.884A	3.004A	850.007	88.249%	1760	45.5	45.70°C	0.992
	12.194V	5.017V	3.344V	4.994V	963.187				60.22°C	115.11V
11	69.346A	8.981A	8.893A	3.008A	934.773	87.580%	1830	46.5	46.34°C	0.992
	12.186V	5.012V	3.340V	4.989V	1067.342				61.74°C	115.09V
CL1	0.151A	14.002A	13.999A	0.000A	120.115	84.501%	0	0	46.79°C	0.977
	12.260V	5.065V	3.382V	5.125V	142.146				42.00°C	115.16V

CL2	70.522A	1.002A	1.001A	1.000A	873.623	88.531%	1780	45.8	45.64°C	0.992
	12.197V	5.030V	3.356V	5.067V	986.802				60.32°C	115.09V

The results above are not used in the certification process

230V

Test #	12V	5V	3.3V	5VSB	DC/AC (Watts)	Efficiency	Fan Speed (RPM)	PSU Noise (dB[A])	Temps (In/Out)	PF/AC Volts
1	5.158A	1.967A	1.940A	0.978A	84.857	86.683%	0	<6.0	46.80°C	0.790
	12.265V	5.083V	3.399V	5.114V	97.893				40.05°C	230.30V
2	11.298A	2.959A	2.920A	1.176A	169.330	90.547%	500	12.8	40.32°C	0.907
	12.253V	5.071V	3.388V	5.101V	187.008				47.55°C	230.33V
3	17.829A	3.456A	3.399A	1.375A	254.461	92.316%	605	17.1	41.05°C	0.944
	12.253V	5.065V	3.383V	5.090V	275.641				48.65°C	230.33V
4	24.375A	3.955A	3.905A	1.576A	339.668	92.868%	730	23.1	41.86°C	0.960
	12.245V	5.058V	3.378V	5.077V	365.752				50.15°C	230.30V
5	30.605A	4.949A	4.893A	1.777A	424.980	92.962%	905	29.1	42.34°C	0.968
	12.236V	5.051V	3.372V	5.065V	457.154				51.25°C	230.30V
6	36.779A	5.949A	5.880A	1.980A	509.499	92.798%	1085	34.1	42.70°C	0.973
	12.227V	5.044V	3.366V	5.052V	549.040				52.02°C	230.69V
7	43.029A	6.950A	6.876A	2.183A	594.839	92.527%	1310	39.0	43.12°C	0.976
	12.218V	5.037V	3.360V	5.039V	642.880				53.52°C	230.91V
8	49.301A	7.957A	7.873A	2.389A	680.225	92.201%	1285	38.4	43.26°C	0.978
	12.207V	5.028V	3.353V	5.024V	737.760				54.42°C	230.34V
9	55.959A	8.466A	8.364A	2.392A	765.222	91.806%	1560	43.0	44.25°C	0.981
	12.200V	5.022V	3.348V	5.018V	833.524				55.89°C	230.32V
10	62.370A	8.974A	8.886A	3.005A	850.076	91.338%	1745	45.4	45.30°C	0.982
	12.191V	5.016V	3.343V	4.993V	930.692				57.29°C	230.36V
11	69.359A	8.983A	8.896A	3.009A	934.864	90.893%	1830	46.5	46.36°C	0.983
	12.185V	5.011V	3.339V	4.987V	1028.535				59.38°C	230.38V
CL1	0.156A	14.003A	14.002A	0.000A	120.165	85.691%	0	0	47.63°C	0.863
	12.259V	5.064V	3.381V	5.125V	140.230				42.18°C	230.57V

CL2	70.524A	1.004A	1.000A	1.000A	873.507	91.671%	1800	46.0	45.06°C	0.982
	12.195V	5.028V	3.353V	5.066V	952.868				57.20°C	230.33V

The results above are not used in the certification process

Light Load Tests

115V

Test #	12V	5V	3.3V	5VSB	DC/AC (Watts)	Efficiency	Fan Speed (RPM)	PSU Noise (dB[A])	PF/AC Volts
1	1.172A	0.492A	0.469A	0.194A	19.470	64.937%	0	<6.0	0.796
	12.266V	5.086V	3.400V	5.143V	29.983				115.11V
2	2.414A	0.984A	0.969A	0.390A	39.903	78.102%	0	<6.0	0.905
	12.264V	5.084V	3.398V	5.136V	51.091				115.11V
3	3.593A	1.477A	1.440A	0.585A	59.481	83.344%	0	<6.0	0.948
	12.268V	5.084V	3.398V	5.128V	71.368				115.12V
4	4.833A	1.968A	1.942A	0.781A	79.883	85.471%	0	<6.0	0.960
	12.266V	5.083V	3.398V	5.120V	93.462				115.12V

The results above are not used in the certification process

230V

Test #	12V	5V	3.3V	5VSB	DC/AC (Watts)	Efficiency	Fan Speed (RPM)	PSU Noise (dB[A])	PF/AC Volts
1	1.175A	0.491A	0.469A	0.194A	19.506	64.755%	0	<6.0	0.453
	12.267V	5.088V	3.403V	5.144V	30.123				230.46V
2	2.415A	0.982A	0.969A	0.389A	39.915	78.525%	0	<6.0	0.595
	12.268V	5.086V	3.401V	5.136V	50.831				230.44V
3	3.590A	1.475A	1.441A	0.585A	59.431	83.856%	0	<6.0	0.700
	12.266V	5.084V	3.399V	5.128V	70.873				230.29V
4	4.831A	1.967A	1.941A	0.781A	79.844	86.387%	0	<6.0	0.776
	12.265V	5.083V	3.398V	5.120V	92.426				230.44V

The results above are not used in the certification process

Ripple Measurements

115V

Test	12V	5V	3.3V	5VSB	Pass/Fail
10% Load	4.9 mV	6.2 mV	13.1 mV	5.2 mV	Pass
20% Load	22.5 mV	7.2 mV	13.2 mV	6.4 mV	Pass
30% Load	7.1 mV	6.1 mV	12.3 mV	4.9 mV	Pass
40% Load	5.6 mV	6.5 mV	11.9 mV	4.9 mV	Pass
50% Load	5.6 mV	7.3 mV	12.3 mV	4.7 mV	Pass
60% Load	6.4 mV	8.9 mV	13.6 mV	6.5 mV	Pass
70% Load	7.0 mV	10.1 mV	14.5 mV	6.7 mV	Pass
80% Load	8.3 mV	10.3 mV	14.2 mV	7.7 mV	Pass
90% Load	7.7 mV	9.1 mV	15.2 mV	6.4 mV	Pass
100% Load	11.3 mV	14.4 mV	18.2 mV	10.3 mV	Pass
110% Load	77.1 mV	28.6 mV	52.9 mV	26.6 mV	Fail
Crossload 1	27.1 mV	16.9 mV	19.3 mV	5.8 mV	Pass
Crossload 2	9.9 mV	11.5 mV	16.1 mV	7.8 mV	Pass

The results above are not used in the certification process

230V

Test	12V	5V	3.3V	5VSB	Pass/Fail
10% Load	3.5 mV	5.5 mV	9.4 mV	4.1 mV	Pass
20% Load	23.0 mV	6.5 mV	9.5 mV	5.4 mV	Pass
30% Load	7.3 mV	5.2 mV	9.3 mV	4.1 mV	Pass
40% Load	5.8 mV	7.0 mV	9.3 mV	5.7 mV	Pass
50% Load	5.6 mV	7.6 mV	9.7 mV	5.1 mV	Pass
60% Load	5.4 mV	7.7 mV	10.4 mV	5.1 mV	Pass
70% Load	5.5 mV	7.9 mV	11.3 mV	5.0 mV	Pass
80% Load	6.1 mV	7.8 mV	10.5 mV	4.7 mV	Pass

Test	12V	5V	3.3V	5VSB	Pass/Fail
90% Load	7.0 mV	9.5 mV	13.1 mV	5.9 mV	Pass
100% Load	10.2 mV	13.9 mV	14.0 mV	7.7 mV	Pass
110% Load	116.4 mV	14.9 mV	15.3 mV	9.7 mV	Pass
Crossload 1	26.3 mV	16.4 mV	16.7 mV	6.2 mV	Pass
Crossload 2	9.5 mV	10.7 mV	13.0 mV	5.9 mV	Pass

The results above are not used in the certification process

Gigabyte Aorus 850



Top side

AORUS

SN18273G003569

AP850GM

SWITCHING POWER SUPPLY / 交換式電源供應器
開關電源供應器 / 交換式電源供應器

MODEL NAME / 型號 / 型號 / 모델명		GP-AP850GM				
AC Input / 交流輸入 / 交流輸入 / 입력		Input Voltage 輸入電壓 / 輸入電壓: 100-240 VAC Input Current 輸入電流 / 輸入電流: 12A-6A, Frequency 頻率 / 頻率: 50-60 Hz.				
PFC		ACTIVE PFC				
DC OUTPUT / 直流輸出 / 直流輸出 / 출력	+3.3V	+5V	+12V	-12V	+5VSB	
MAX OUTPUT CURRENT / 最大輸出電流 / 最大輸出電流 / 최대 모드	20A	20A	70.5A	0.3A	3.0A	
MAX COMBINED WATTAGE / 最大輸出瓦特數 / 最大輸出瓦特數 / 최대 와트수	120W		846W	3.6W	15W	
			850W			

Caution! Hazardous
Hazardous Voltage inside
Do not open the power supply cover.
Trained personnel only.
No serviceable components inside.
警告: 內有高壓電路, 請勿打開外殼, 避免發生危險
警告: 內有高壓電路, 請勿打開外殼, 避免發生危險

製造商: 技嘉科技股份有限公司
製造商: 技嘉科技股份有限公司
GIGABYTE TECHNOLOGY CO., LTD.
Manufacturer: Gigabyte Technology Co., Ltd.
Xindian Dist. 231 New Taipei City, TAIWAN
(Factory: No. 46, Kwei-San Road, Kwei-San New Rd.,
Sheng-Ying Industrial Park, Tainan, 701100 Taiwan,
PEOPLE'S REPUBLIC OF CHINA)

AG 零件#: 60-1-077-3607
ALSY 型號: 2017-04
Designed by GIGABYTE and
made in China
製造商: 技嘉
製造商: 技嘉

Power specifications label

All data and graphs included in this test report can be used by any individual on the following conditions:

- › It should be mentioned that the test results are provided by Cybenetics
- › The link to the original test results document should be provided in any case

CYBENETICS LTD Syrou 6, Latsia, 2231, Nicosia Cyprus

Cybenetics runs voluntary certification programs for power supplies - ETA for efficiency, LAMBDA for noise and SAFE for safety and correct operation - and for cooling products, with DELTA for chassis soundproofing and PHI for fan airflow and static pressure. THETA rates cooler performance on AMD AM5 and Intel LGA1851 outside ISO 17065 and accreditation scope

www.cybenetics.com - info@cybenetics.com