Make It Yours.

1 MasterFan A140FC (High Speed)

Serial Number MFZP4NA30NPKR11261900030

Lab ID CM14000238

Certification ID FN25238

Test Result Report ID: 26FN238A

Certificate Issue Date: May 29, 2026

Scheme: PHI

Airflow Rating

Static Pressure Rating

Aristeidis Bitziopoulos, Certification Body General Manager

SECTION A: Noise Testing Equipment

Test Environment	Hemi-Anechoic Chamber with 6 dB(A) noise floor
Conditions	25(±2) degrees Celsius, 40-50% humidity
Sound Analyzer	Bruel & Kjaer 2270-S G4 & 2250-L G4
Microphone	Bruel & Kjaer Type 4955-A
Mic Calibrator	Bruel & Kjaer Type 4231
Data Logger	Picoscope TC-08
Testing Methodology	Cybenetics Phi Fan Performance Standard


SECTION B: Fan Testing Instrument Technical Specifications

Manufacturer	Long Win Science & Technology Corporation
Model Number	LW-9266
Air Flow Rate	2.4 – 250 CFM
Accuracy of Air Flow Rate	< 3.5% INFS
Repeatability error	< 2%
Static pressure	0-20mmAq (100mmAq with the high static pressure throttle device)
Overall Dimensions	0.7 (W) x 2.2 (L) x 1.6 (H) m
Power Source	220VAC, 5A, Single Phase, 50/60Hz
Based on Standards	ISO 5801-2007, AMCA 210-0, ASHRAE 51-2007, IEC 61591-2005, GB/T 1236-200

SECTION C: PHI Performance Levels

Pressure at 25 dB(A)	P (mmAq)	1.40
Airflow at 25 dB(A)	Q (CFM)	64.99


SECTION D: Information about DUT

Product Identification Details	
Brand	1
Model	MasterFan A140FC (High Speed)
Serial Number	MFZP4NA30NPKR11261900030
Product Specifications	
Manufacturer-Provided Information	
Bearing	Two Ball
Connector	PWM
Cable length (mm)	100
Daisy-chain	Cable
RGB Connector	None
RGB Daisy-chain	None
Cybenetics Measurements	
Max Speed (RPM)	2955
Max Airflow (CFM)	156.67
Max Static Pressure (mmAq)	7.65
Max Fan Noise Level (dBA)	48.50
Fan Max Current (A)	0
Fan Weight (gr)	375
Dimensions (W x H x D)	140mm x 140mm x 30mm
Cybenetics Testing Information	
Lab ID	CM14000238
Date of receipt	May 25, 2026
Testing Date	May 28, 2026
Report Issued Date	May 29, 2026
Engineer Name	Ioannis Kalyviotis
Authorized By the Laboratory Technical Manager	Aristeidis Bitziopoulos
Signature	

SECTION E: Long Win LW-9266 - Pressure and Airflow

PQ Chart - All Speeds


Static pressure against airflow, one curve per speed step

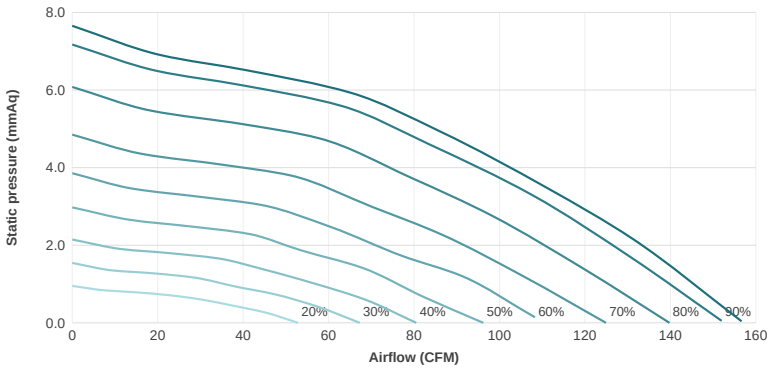

Speed Setting	Max Airflow (CFM)	Max Static Pressure (mmAq)	Fan Speed (RPM)	Max Power (W)
20%	52.87	0.95	1038 - 1049	0.13
30%	67.31	1.54	1321 - 1329	0.14
40%	80.53	2.15	1568 - 1580	0.14
50%	96.23	2.98	1833 - 1862	0.14
60%	108.29	3.86	2090 - 2113	0.14
70%	124.92	4.85	2351 - 2371	0.14
80%	139.79	6.08	2621 - 2654	0.14
90%	152.01	7.17	2847 - 2888	0.16
100%	156.67	7.65	2946 - 2983	0.16


PQ Chart 20%

Static pressure and fan speed against airflow

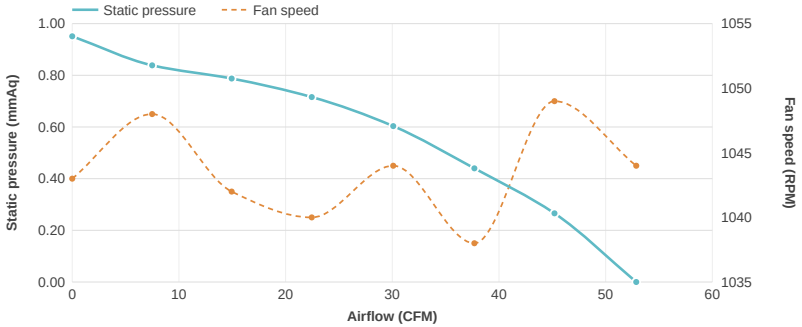


Airflow (CFM)	Static Pressure (mmAq)	Fan Speed (RPM)	Current (A)	Power (W)
0.00	0.95	1043	0.011	0.13
7.49	0.84	1048	0.011	0.13
14.94	0.79	1042	0.011	0.13
22.45	0.72	1040	0.011	0.13
30.09	0.60	1044	0.011	0.13
37.70	0.44	1038	0.011	0.13
45.20	0.27	1049	0.011	0.13
52.87	-0.01	1044	0.011	0.13

PQ Chart 30%

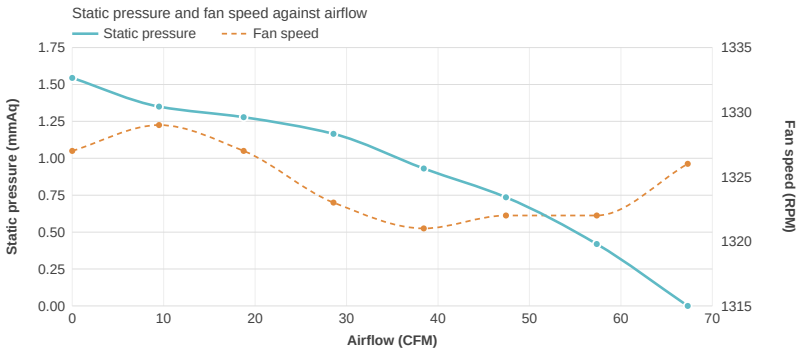


Airflow (CFM)	Static Pressure (mmAq)	Fan Speed (RPM)	Current (A)	Power (W)
0.00	1.54	1327	0.012	0.14
9.50	1.35	1329	0.011	0.13
18.74	1.28	1327	0.011	0.13
28.57	1.17	1323	0.011	0.13
38.44	0.93	1321	0.012	0.14
47.43	0.74	1322	0.011	0.13
57.36	0.42	1322	0.011	0.13
67.31	-0.01	1326	0.011	0.13

PQ Chart 40%

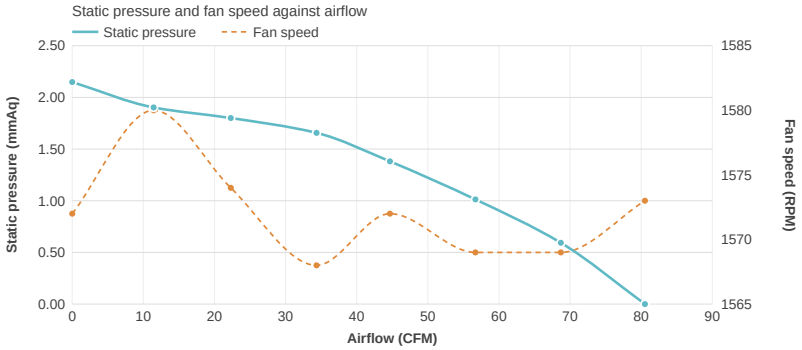


Airflow (CFM)	Static Pressure (mmAq)	Fan Speed (RPM)	Current (A)	Power (W)
0.00	2.15	1572	0.012	0.14
11.45	1.90	1580	0.011	0.13
22.29	1.80	1574	0.012	0.14
34.35	1.66	1568	0.011	0.13
44.67	1.38	1572	0.012	0.14
56.69	1.01	1569	0.012	0.14
68.70	0.59	1569	0.012	0.14
80.53	-0.01	1573	0.011	0.13

PQ Chart 50%

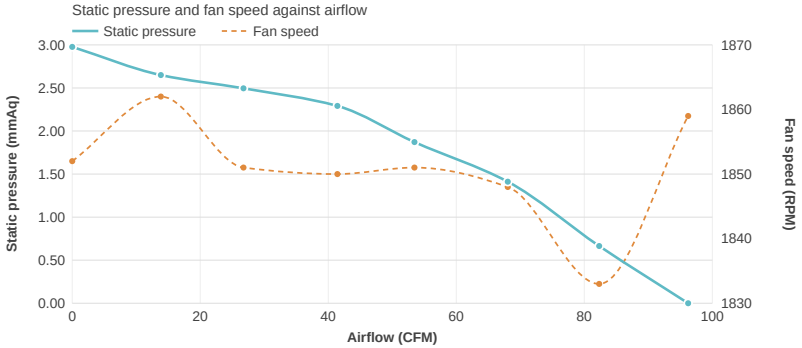


Airflow (CFM)	Static Pressure (mmAq)	Fan Speed (RPM)	Current (A)	Power (W)
0.00	2.98	1852	0.012	0.14
13.84	2.65	1862	0.012	0.14
26.75	2.50	1851	0.012	0.14
41.43	2.29	1850	0.012	0.14
53.46	1.87	1851	0.012	0.14
68.05	1.41	1848	0.011	0.13
82.32	0.66	1833	0.012	0.14
96.23	-0.02	1859	0.012	0.14

PQ Chart 60%

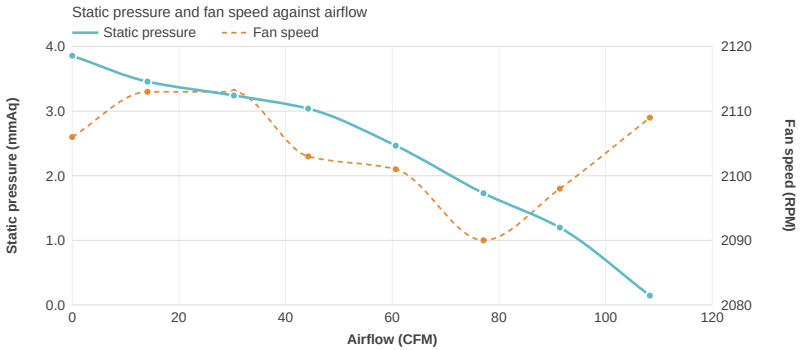


Airflow (CFM)	Static Pressure (mmAq)	Fan Speed (RPM)	Current (A)	Power (W)
0.00	3.86	2106	0.012	0.14
14.12	3.46	2113	0.012	0.14
30.31	3.24	2113	0.012	0.14
44.24	3.04	2103	0.012	0.14
60.66	2.47	2101	0.012	0.14
77.11	1.73	2090	0.012	0.14
91.41	1.20	2098	0.012	0.14
108.29	0.14	2109	0.012	0.14

PQ Chart 70%

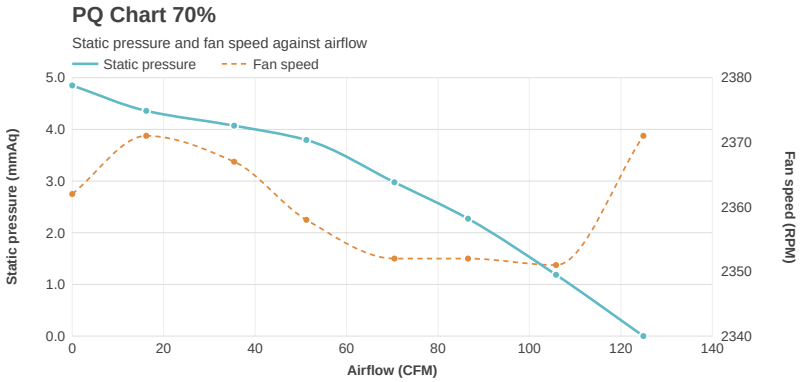


Airflow (CFM)	Static Pressure (mmAq)	Fan Speed (RPM)	Current (A)	Power (W)
0.00	4.85	2362	0.012	0.14
16.18	4.36	2371	0.012	0.14
35.42	4.07	2367	0.012	0.14
51.21	3.80	2358	0.012	0.14
70.48	2.98	2352	0.012	0.14
86.58	2.27	2352	0.012	0.14
105.81	1.19	2351	0.012	0.14
124.92	-0.04	2371	0.012	0.14

PQ Chart 80%

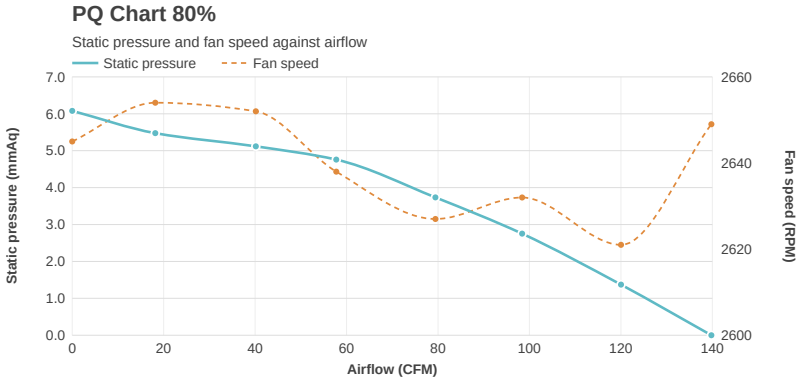


Airflow (CFM)	Static Pressure (mmAq)	Fan Speed (RPM)	Current (A)	Power (W)
0.00	6.08	2645	0.012	0.14
18.18	5.48	2654	0.012	0.14
40.15	5.12	2652	0.012	0.14
57.74	4.76	2638	0.012	0.14
79.44	3.73	2627	0.012	0.14
98.40	2.75	2632	0.012	0.14
120.03	1.37	2621	0.012	0.14
139.79	-0.04	2649	0.012	0.14

PQ Chart 90%

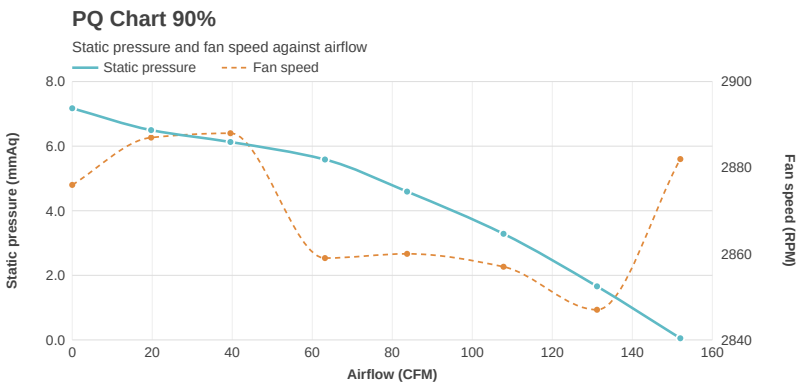

Airflow (CFM)	Static Pressure (mmAq)	Fan Speed (RPM)	Current (A)	Power (W)
0.00	7.17	2876	0.013	0.16
19.71	6.50	2887	0.013	0.16
39.55	6.13	2888	0.013	0.16
63.18	5.59	2859	0.013	0.16
83.70	4.59	2860	0.013	0.16
107.81	3.28	2857	0.013	0.16
131.18	1.66	2847	0.013	0.16
152.01	0.05	2882	0.012	0.14


PQ Chart 100%

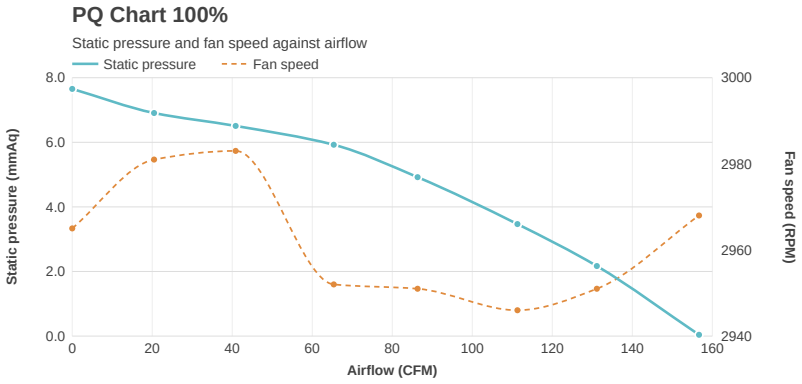


Airflow (CFM)	Static Pressure (mmAq)	Fan Speed (RPM)	Current (A)	Power (W)
0.00	7.65	2965	0.013	0.16
20.46	6.91	2981	0.013	0.16
40.86	6.51	2983	0.013	0.16
65.38	5.92	2952	0.013	0.16
86.33	4.92	2951	0.013	0.16
111.29	3.47	2946	0.013	0.16
131.13	2.17	2951	0.013	0.16
156.67	0.04	2968	0.013	0.16

SECTION F: General Performance


Fan Percentage RPM LongWin

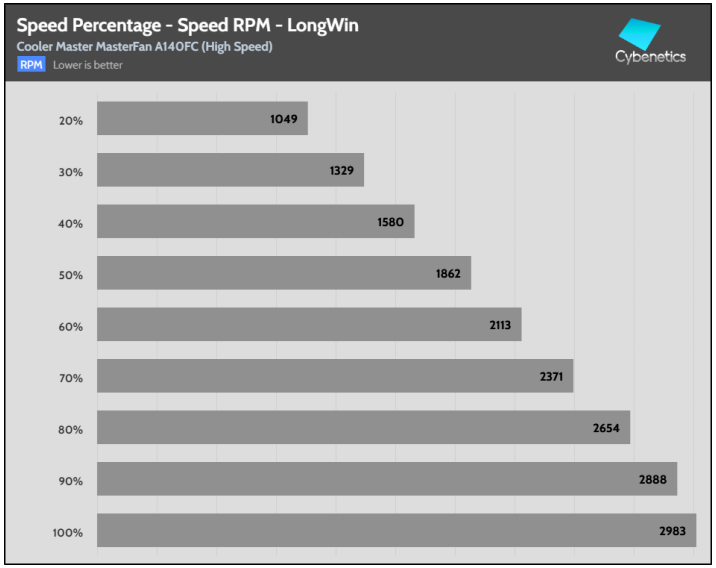


Fan Percentage CFM

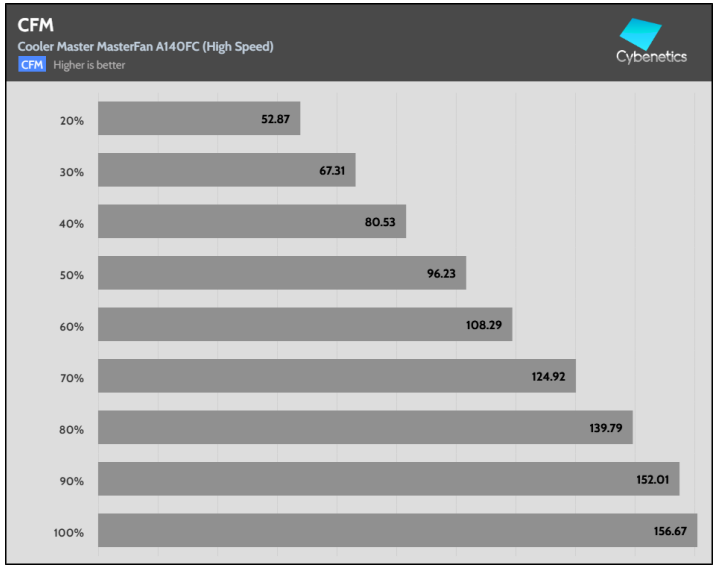


Fan Percentage Pressure

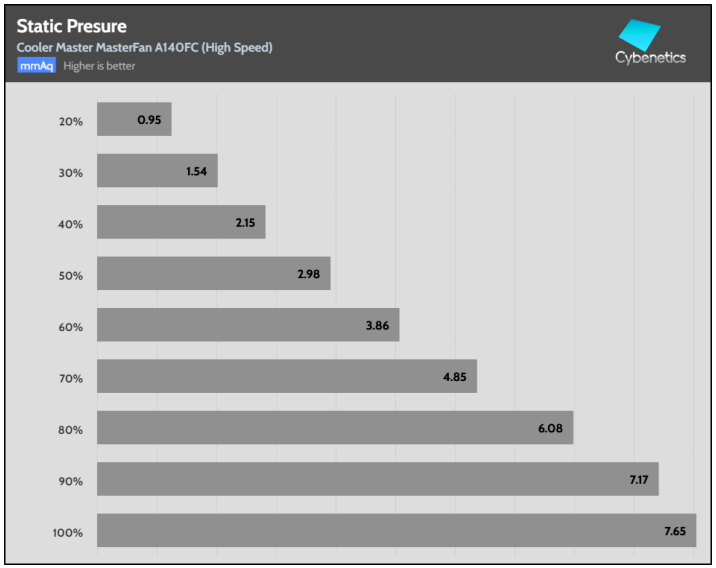

Fan Percentage Amps

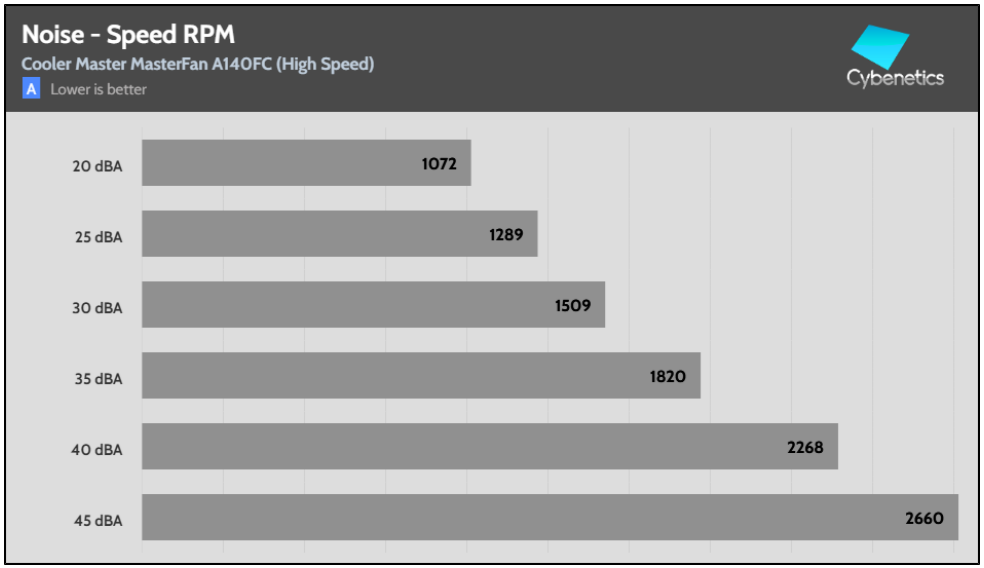

Fan Percentage Noise

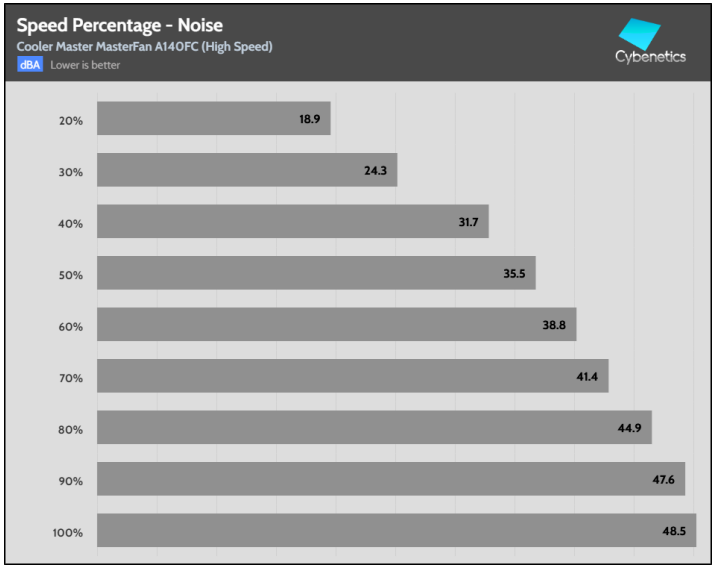

SECTION G: Uncertainty

Fan Performance Uncertainty Estimation

General Statement

Measurement uncertainty associated with the reported results was evaluated and estimated in accordance with JCGM 100:2008 (Guide to the Expression of Uncertainty in Measurement — GUM) and ISO/IEC 17025:2017, Clauses 7.6 and 7.2.

The uncertainty budget accounts for all significant identified contributors arising from the measurement process, instrumentation, test conditions, and operator interaction.

The reported expanded uncertainty U is obtained by multiplying the combined standard uncertainty uc by a coverage factor k = 2, corresponding to a confidence level of approximately 95 %, assuming a normal probability distribution.

Unless otherwise stated, the reported uncertainty applies only to the specific measurements performed and does not include long-term drift, aging effects, or future environmental changes.

Expanded Measurement Uncertainty by Measurement Type

Measurement	Expanded Uncertainty U (k=2, norm)
Fan Air Flow	±1.23176 % of reading (k=2) — e.g. ±3.69 CFM at 25 CFM, ±4.29 at 92 CFM, ±7.15 at 250 CFM

Fan Static Pressure	±0.6727 Pa

Air flow uncertainty is relative to the reading: $U(Q) = 2\cdot\sqrt{[(1.8200)^2 + (0.0123176\cdot Q)^2]}$ CFM, valid over the declared measuring range 2.4 – 250 CFM.

The reported static pressure uncertainty applies over the 0 – 20 mmAq (0 – 196.1 Pa) measuring range of the Long Win LW-9266 apparatus. The apparatus can be extended to 100 mmAq (981 Pa) with the high static pressure throttle device; the uncertainty of that extended range has not been separately verified and the value stated above does not apply to it.

1 MasterFan A140FC (High Speed)



Front



Rear

All data and graphs included in this test report can be used by any individual on the following conditions:
› It should be mentioned that the test results are provided by Cybenetics
› The link to the original test results document should be provided in any case

Cybenetics runs voluntary certification programs for power supplies - ETA for efficiency, LAMBDA for noise and SAFE for safety and correct operation - and for cooling products, with DELTA for chassis soundproofing and PHI for fan airflow and static pressure. THETA rates cooler performance on AMD AM5 and Intel LGA1851 outside ISO 17065 and accreditation scope

CYBENETICS LTD Syrou 6, Latsia, 2231, Nicosia Cyprus

www.cybenetics.com - info@cybenetics.com