

Anex

MSI MPG A750G

Lab ID#: MS75001979
Receipt Date: Feb 9, 2022
Test Date: Feb 17, 2022

Report: 22PS1979A
Report Date: Feb 18, 2022

DUT INFORMATION

Brand	MSI
Manufacturer (OEM)	CWT
Series	MPG
Model Number	
Serial Number	
DUT Notes	

DUT SPECIFICATIONS

Rated Voltage (Vrms)	100-240
Rated Current (Arms)	10-5
Rated Frequency (Hz)	50-60
Rated Power (W)	750
Type	ATX12V
Cooling	135mm Fluid Dynamic Bearing Fan (HA13525H12SF-Z)
Semi-Passive Operation	✓ (selectable)
Cable Design	Fully Modular

TEST EQUIPMENT

Electronic Loads	Chroma 63601-5 x4 Chroma 63600-2 x2 63640-80-80 x20 63610-80-20 x2
AC Sources	Chroma 6530, Keysight AC6804B
Power Analyzers	N4L PPA1530 x2
Sound Analyzer	Bruel & Kjaer 2270 G4
Microphone	Bruel & Kjaer Type 4955-A
Data Loggers	Picoscope TC-08 x2, Labjack U3-HV x2
Tachometer	UNI-T UT372 x2
Digital Multimeter	Keysight U1273AX, Fluke 289, Keithley 2015 - THD
UPS	CyberPower OLS3000E 3kVA x2
Transformer	3kVA x2

All data and graphs included in this test report can be used by any individual on the following conditions:

- > It should be mentioned that the test results are provided by Cybenetics
- > The link to the original test results document should be provided in any case

PAGE 1/17

Anex

MSI MPG A750G

RESULTS

Temperature Range (°C /°F)	30-32 / 86-89.6
ErP Lot 3/6 Ready	✓
(EU) No 617/2013 Compliance	✓
ALPM (Alternative Low Power Mode) compatible	✓

115V

Average Efficiency	88.074%
Efficiency With 10W (≤500W) or 2% (>500W)	50.595
Average Efficiency 5VSB	78.033%
Standby Power Consumption (W)	0.0286377
Average PF	0.991
Avg Noise Output	22.69 dB(A)
Efficiency Rating (ETA)	GOLD
Noise Rating (LAMBDA)	A

230V

Average Efficiency	90.311%
Average Efficiency 5VSB	77.645%
Standby Power Consumption (W)	0.0544173
Average PF	0.965
Avg Noise Output	23.82 dB(A)
Efficiency Rating (ETA)	GOLD
Noise Rating (LAMBDA)	A

POWER SPECIFICATIONS

Rail		3.3V	5V	12V	5VSB	-12V
Max. Power	Amps	22	22	62.5	3	0.3
	Watts	120		750	15	3.6
Total Max. Power (W)		750				

HOLD-UP TIME & POWER OK SIGNAL (230V)

Hold-Up Time (ms)	18.1
AC Loss to PWR_OK Hold Up Time (ms)	15.8
PWR_OK Inactive to DC Loss Delay (ms)	2.3

All data and graphs included in this test report can be used by any individual on the following conditions:

- › It should be mentioned that the test results are provided by Cybenetics
- › The link to the original test results document should be provided in any case

PAGE 2/17

CABLES AND CONNECTORS

Modular Cables

Description	Cable Count	Connector Count (Total)	Gauge	In Cable Capacitors
ATX connector 20+4 pin (600mm)	1	1	18AWG	No
4+4 pin EPS12V (700mm)	2	2	18AWG	No
6+2 pin PCIe (600mm)	2	2	18AWG	No
6+2 pin PCIe (600mm+150mm)	2	4	18AWG	No
SATA (500mm+150mm+150mm)	2	6	18AWG	No
SATA (500mm+150mm)	1	2	18AWG	No
4 pin Molex (500mm+150mm+150mm+150mm) / FDD (+150mm)	1	4 / 1	18-20AWG	No

All data and graphs included in this test report can be used by any individual on the following conditions:

- › It should be mentioned that the test results are provided by Cybenetics
- › The link to the original test results document should be provided in any case

PAGE 3/17

Anex

MSI MPG A750G

General Data	
Manufacturer (OEM)	CWT
PCB Type	Double Sided
Primary Side	
Transient Filter	4x Y caps, 2x X caps, 2x CM chokes, 1x MOV
Inrush Protection	1x NTC Thermistor SCK-037 (3 Ohm) & Relay
Bridge Rectifier(s)	2x GBU806 (600V, 8A @ 100°C)
APFC MOSFETs	2x On Semiconductor FCPF190N60E (600V, 13.1A @ 100°C, Rds(on): 0.19Ohm)
APFC Boost Diode	1x On Semiconductor FFSP0665B (650V, 6A @ 150°C)
Bulk Cap(s)	1x Nippon Chemi-Con (400V, 560uF, 2,000h @ 105°C, KMR)
Main Switchers	2x On Semiconductor FCPF190N60E (600V, 13.1A @ 100°C, Rds(on): 0.19Ohm)
APFC Controller	Champion CM6500UNX & CM03X
Resonant Controller	Champion CU6901VA
Topology	Primary side: APFC, Half-Bridge & LLC converter Secondary side: Synchronous Rectification & DC-DC converters
Secondary Side	
+12V MOSFETs	4x On Semiconductor NTMFS5C430N (40V, 131A @ 100°C, Rds(on): 1.7mOhm)
5V & 3.3V	DC-DC Converters: 2x UBIQ QM3054M6 (30V, 61A @ 100°C, Rds(on): 4.8mOhm) & 2x UBIQ QN3107M6N (30V, 70A @ 100°C, Rds(on): 2.6mOhm) PWM Controller(s): uPI-Semi uP3861P
Filtering Capacitors	Electrolytic: 2x Nichicon (2-5,000h @ 105°C, HD), 3x Nippon Chemi-Con (1-5,000h @ 105°C, KZE), 2x Nichicon (4-10,000h @ 105°C, HE), 1x Nippon Chemi-Con (4-10,000h @ 105°C, KY), 1x Rubycon (4-10,000h @ 105°C, YXJ), 1x Rubycon (2-10,000h @ 105°C, YXF) Polymer: 18x United Chemi-Con, 8x FPCAP
Supervisor IC	Weltrend WT7502R (OVP, UVP, SCP, PG)
Fan Controller	Microchip PIC16F1503
Fan Model	Hong Hua HA13525H12SF-Z (135mm, 12V, 0.5A, Fluid Dynamic Bearing Fan)
5VSB Circuit	
Rectifier	1x PS1045L SBR (45V, 10A)
Standby PWM Controller	On Bright OB2365T

All data and graphs included in this test report can be used by any individual on the following conditions:


- > It should be mentioned that the test results are provided by Cybenetics
- > The link to the original test results document should be provided in any case

PAGE 4/17

EFFICIENCY UNDER HIGH AMBIENT TEMPERATURE

Efficiency: MSI MPG A750G

Ambient: 37°C - 47°C (98.6°F - 116.6°F)

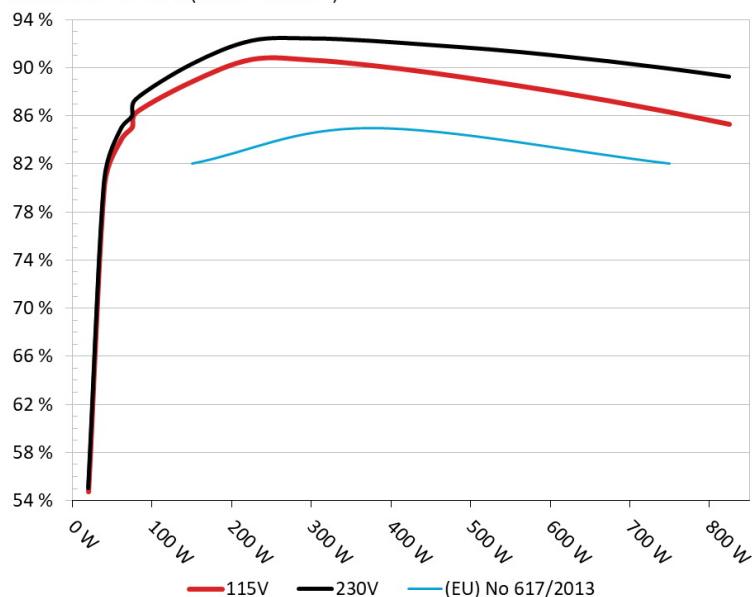


INFO

The PSU's efficiency under high ambient temperatures with 115V and 230V input. For this graph the results of the 10-110% load regulation table are used

5VSB EFFICIENCY

5VSB Efficiency: MSI MPG A750G

Ambient: 34°C - 36°C (93.2°F - 96.8°F)

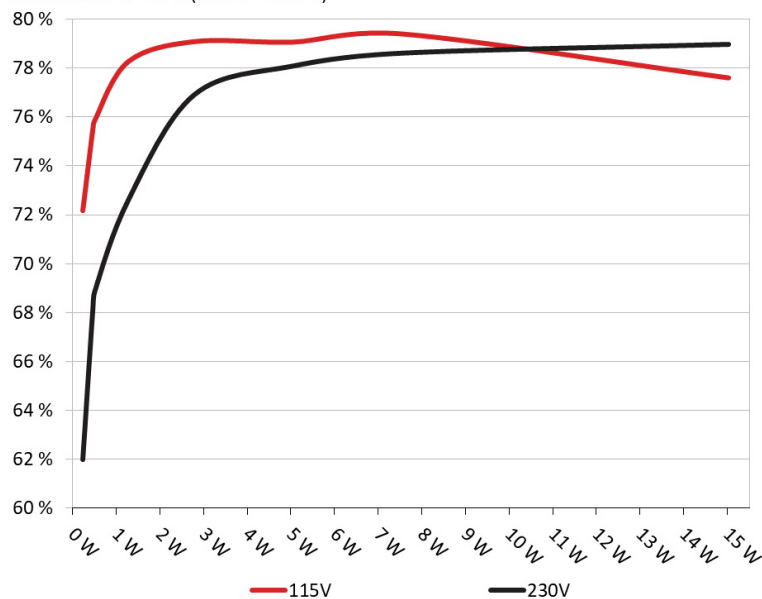

INFO

This graph depicts the efficiency levels of the 5VSB rail with 115V and 230V input

All data and graphs included in this test report can be used by any individual on the following conditions:

- > It should be mentioned that the test results are provided by Cybenetics
- > The link to the original test results document should be provided in any case

Anex

MSI MPG A750G

5VSB EFFICIENCY -115V (ERP LOT 3/6 & CEC)

Test #	5VSB	DC/AC (Watts)	Efficiency	PF/AC Volts
1	0.045A	0.229W	72.167%	0.032
	5.079V	0.317W		115.12V
2	0.09A	0.457W	75.478%	0.06
	5.079V	0.605W		115.11V
3	0.55A	2.788W	79.092%	0.259
	5.069V	3.525W		115.12V
4	1A	5.058W	79.072%	0.347
	5.058V	6.397W		115.12V
5	1.5A	7.57W	79.403%	0.394
	5.046V	9.533W		115.12V
6	3A	15.032W	77.607%	0.457
	5.01V	19.369W		115.12V

5VSB EFFICIENCY -230V (ERP LOT 3/6 & CEC)

Test #	5VSB	DC/AC (Watts)	Efficiency	PF/AC Volts
1	0.045A	0.229W	62.001%	0.011
	5.08V	0.369W		230.25V
2	0.09A	0.457W	68.1%	0.02
	5.079V	0.671W		230.24V
3	0.55A	2.788W	76.917%	0.101
	5.068V	3.625W		230.25V
4	1A	5.058W	78.088%	0.166
	5.058V	6.477W		230.25V
5	1.5A	7.57W	78.614%	0.221
	5.046V	9.629W		230.25V
6	3.001A	15.031W	78.969%	0.316
	5.01V	19.034W		230.25V

All data and graphs included in this test report can be used by any individual on the following conditions:

- > It should be mentioned that the test results are provided by Cybenetics
- > The link to the original test results document should be provided in any case

PAGE 6/17

Anex

MSI MPG A750G


115V

All data and graphs included in this test report can be used by any individual on the following conditions:

- › It should be mentioned that the test results are provided by Cybenetics
- › The link to the original test results document should be provided in any case

PAGE 7/17


EFFICIENCY GRAPH 115V

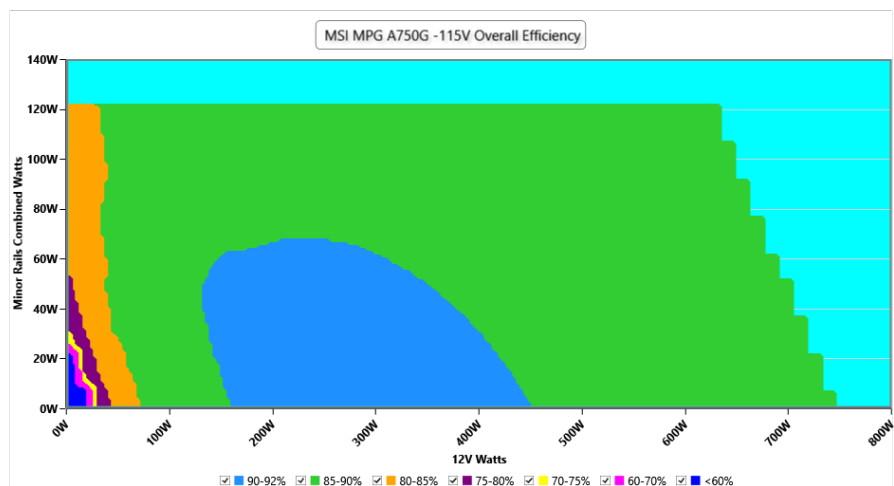

INFO

This graph depicts the PSU's efficiency throughout its entire operational range. For the generation of the efficiency and noise graphs we set our loaders to auto mode through our custom-made software before trying thousands of possible load combinations

NOISE GRAPH 115V

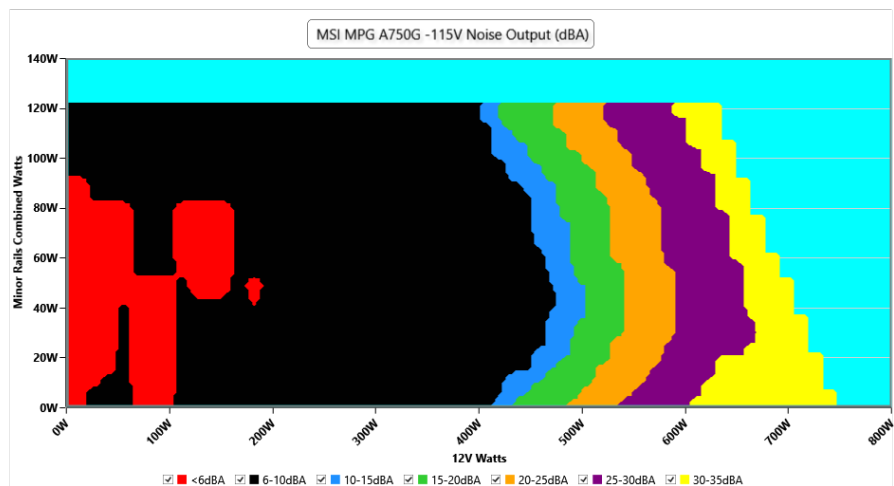

INFO


The PSU's noise in its entire operational range and under 30-32 °C ambient is depicted in this graph. The X axis represents the load on the +12V rail(s) while the Y axis is the load on the minor rails

All data and graphs included in this test report can be used by any individual on the following conditions:

- > It should be mentioned that the test results are provided by Cybenetics
- > The link to the original test results document should be provided in any case

VAMPIRE POWER -115V

Power - 14/02/2022 - 08:38

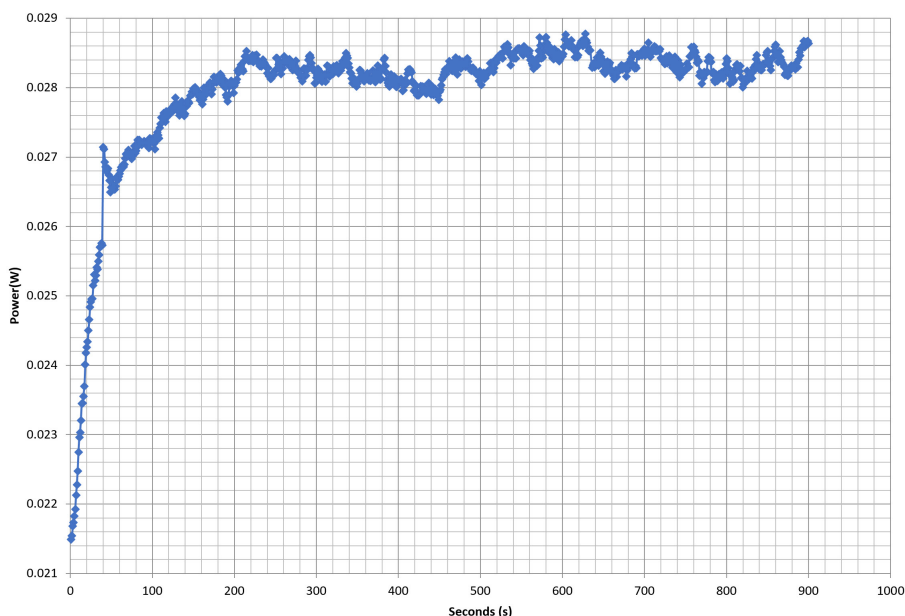

INFO

This graph is generated by the PPA Standby Power Analysis software which takes full control of the power analyzer during the whole procedure. This application features all of the EN50564 & IEC62301 test limits for standby power software testing

All data and graphs included in this test report can be used by any individual on the following conditions:

- › It should be mentioned that the test results are provided by Cybenetics
- › The link to the original test results document should be provided in any case

PAGE 9/17

10-110% LOAD TESTS 115V

Test	12V	5V	3.3V	5VSB	DC/AC (Watts)	Efficiency	Fan Speed (RPM)	PSU Noise (dB[A])	Temps (In/Out)	PF/AC Volts
10%	4.391A	1.988A	2.013A	0.991A	75.022	85.064%	0	<6.0	45.69°C	0.979
	12.165V	5.031V	3.28V	5.046V	88.195				40.57°C	115.14V
20%	9.793A	2.985A	3.023A	1.192A	150	88.835%	0	<6.0	46.38°C	0.989
	12.160V	5.027V	3.275V	5.034V	168.852				40.63°C	115.13V
30%	15.569A	3.484A	3.531A	1.371A	225.009	90.689%	0	<6.0	47.12°C	0.992
	12.137V	5.025V	3.272V	5.106V	248.112				41.1°C	115.13V
40%	21.344A	3.983A	4.039A	1.569A	300.092	90.635%	417	7.5	41.37°C	0.993
	12.129V	5.022V	3.268V	5.099V	331.101				48.21°C	115.11V
50%	26.745A	4.983A	5.055A	1.769A	374.693	90.195%	416	7.5	42.01°C	0.992
	12.122V	5.018V	3.264V	5.089V	415.427				49.27°C	115.11V
60%	32.176A	5.983A	6.073A	1.969A	449.579	89.587%	645	18.1	42.82°C	0.992
	12.113V	5.015V	3.26V	5.079V	501.837				50.58°C	115.1V
70%	37.616A	6.985A	7.095A	2.171A	524.477	88.865%	786	24.6	43.1°C	0.993
	12.106V	5.012V	3.256V	5.068V	590.199				51.36°C	115.09V
80%	43.134A	7.989A	8.116A	2.273A	599.68	88.085%	944	30.3	43.42°C	0.994
	12.096V	5.009V	3.253V	5.06V	680.795				52.12°C	115.09V
90%	48.981A	8.491A	8.616A	2.376A	674.69	87.235%	1370	41.2	44.62°C	0.995
	12.090V	5.006V	3.249V	5.051V	773.422				53.68°C	115.08V
100%	54.634A	8.996A	9.147A	2.982A	749.901	86.304%	1655	46.6	45.98°C	0.995
	12.084V	5.003V	3.247V	5.03V	868.906				55.63°C	115.08V
110%	60.166A	10.002A	10.26A	2.986A	824.926	85.298%	2009	51.1	47.91°C	0.996
	12.077V	5V	3.245V	5.024V	967.109				58.52°C	115.07V
CL1	0.115A	14.413A	14.629A	0A	121.314	82.779%	445	8.3	42.39°C	0.987
	12.160V	5.011V	3.26V	5.051V	146.55				49.49°C	115.11V
CL2	0.115A	21.939A	0A	0A	111.42	81.825%	444	8.3	43.51°C	0.986
	12.166V	5.015V	3.281V	5.06V	136.168				51.71°C	115.11V
CL3	0.115A	0A	22.387A	0A	73.983	75.483%	442	8.3	44.77°C	0.981
	12.164V	5.021V	3.242V	5.056V	98.013				54.08°C	115.11V
CL4	61.990A	0A	0A	0A	749.622	87.405%	1560	44.7	46.2°C	0.995
	12.092V	5.026V	3.268V	5.114V	857.646				55.97°C	115.07V

All data and graphs included in this test report can be used by any individual on the following conditions:

- > It should be mentioned that the test results are provided by Cybenetics
- > The link to the original test results document should be provided in any case

PAGE 10/17

Anex

MSI MPG A750G

20-80W LOAD TESTS 115V

Test	12V	5V	3.3V	5VSB	DC/AC (Watts)	Efficiency	Fan Speed (RPM)	PSU Noise (dB[A])	Temps (In/Out)	PF/AC Volts
20W	1.222A	0.495A	0.501A	0.197A	20.014	54.738%	0	<6.0	40.08°C	0.924
	12.166V	5.048V	3.292V	5.071V	36.564				36.95°C	115.13V
40W	2.688A	0.694A	0.702A	0.296A	40.014	80.236%	0	<6.0	41.28°C	0.949
	12.165V	5.047V	3.291V	5.067V	49.87				37.61°C	115.13V
60W	4.156A	0.893A	0.904A	0.395A	60.016	83.903%	0	<6.0	42.53°C	0.969
	12.164V	5.038V	3.285V	5.063V	71.53				38.36°C	115.13V
80W	5.620A	1.093A	1.106A	0.494A	79.991	86.287%	0	<6.0	44.55°C	0.98
	12.164V	5.034V	3.283V	5.059V	92.704				39.99°C	115.14V

RIPPLE MEASUREMENTS 115V

Test	12V	5V	3.3V	5VSB	Pass/Fail
10% Load	8.34mV	9.96mV	17.54mV	4.76mV	Pass
20% Load	9.62mV	10.32mV	15.24mV	4.66mV	Pass
30% Load	15.12mV	10.62mV	15.44mV	5.01mV	Pass
40% Load	12.77mV	10.42mV	16.41mV	6.50mV	Pass
50% Load	11.99mV	10.57mV	16.11mV	5.89mV	Pass
60% Load	13.00mV	11.59mV	16.16mV	6.14mV	Pass
70% Load	13.76mV	11.03mV	15.80mV	7.06mV	Pass
80% Load	14.23mV	11.90mV	17.39mV	7.57mV	Pass
90% Load	13.71mV	11.54mV	16.93mV	8.19mV	Pass
100% Load	21.14mV	12.69mV	20.00mV	10.61mV	Pass
110% Load	22.27mV	14.01mV	20.47mV	11.07mV	Pass
Crossload1	10.16mV	13.66mV	18.96mV	8.70mV	Pass
Crossload2	10.64mV	16.69mV	16.26mV	9.01mV	Pass
Crossload3	9.01mV	9.86mV	17.85mV	8.65mV	Pass
Crossload4	20.39mV	12.17mV	19.18mV	11.76mV	Pass

All data and graphs included in this test report can be used by any individual on the following conditions:

- > It should be mentioned that the test results are provided by Cybenetics
- > The link to the original test results document should be provided in any case

PAGE 11/17

Anex

MSI MPG A750G


230V

All data and graphs included in this test report can be used by any individual on the following conditions:

- › It should be mentioned that the test results are provided by Cybenetics
- › The link to the original test results document should be provided in any case

PAGE 12/17


EFFICIENCY GRAPH 230V

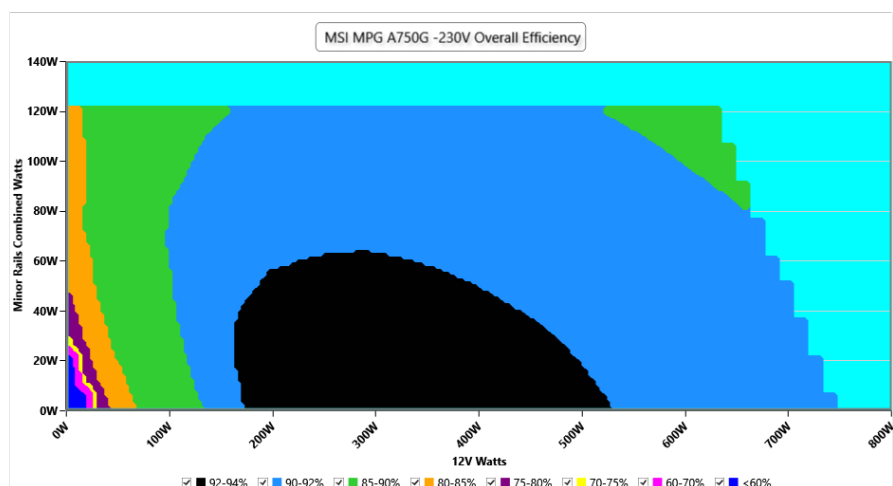

INFO

This graph depicts the PSU's efficiency throughout its entire operational range. For the generation of the efficiency and noise graphs we set our loaders to auto mode through our custom-made software before trying thousands of possible load combinations

NOISE GRAPH 230V

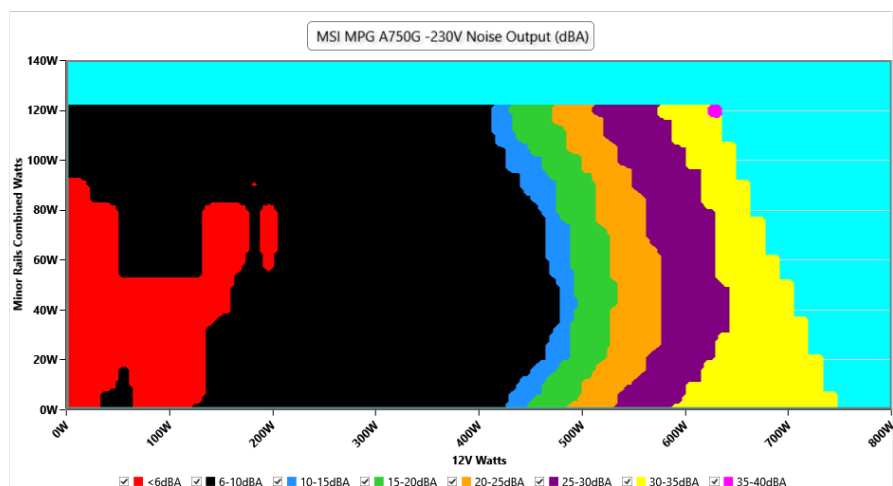

INFO


The PSU's noise in its entire operational range and under 30-32 °C ambient is depicted in this graph. The X axis represents the load on the +12V rail(s) while the Y axis is the load on the minor rails

All data and graphs included in this test report can be used by any individual on the following conditions:

- > It should be mentioned that the test results are provided by Cybenetics
- > The link to the original test results document should be provided in any case

VAMPIRE POWER -230V

Power - 14/02/2022 - 08:38

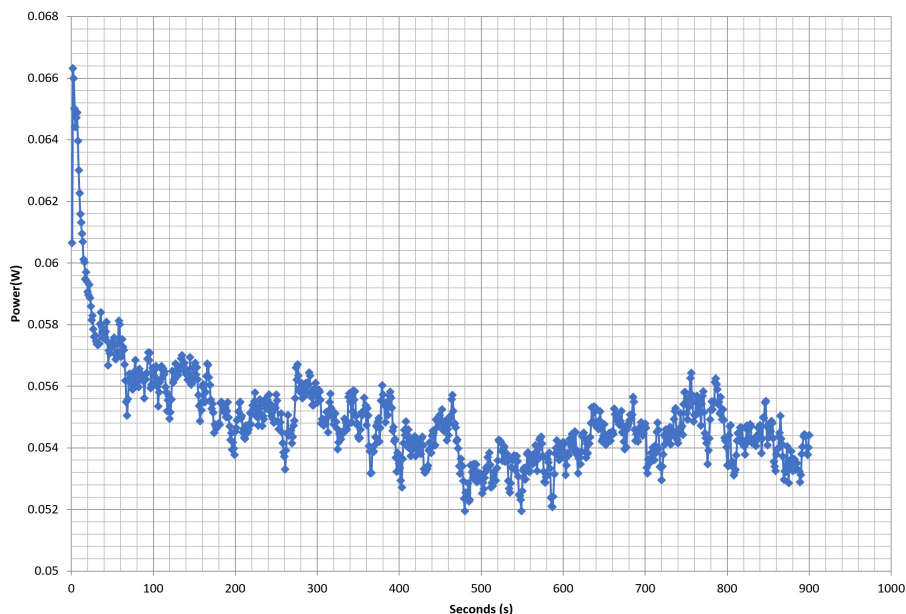

INFO

This graph is generated by the PPA Standby Power Analysis software which takes full control of the power analyzer during the whole procedure. This application features all of the EN50564 & IEC62301 test limits for standby power software testing

All data and graphs included in this test report can be used by any individual on the following conditions:

- › It should be mentioned that the test results are provided by Cybenetics
- › The link to the original test results document should be provided in any case

PAGE 14/17

10-110% LOAD TESTS 230V

Test	12V	5V	3.3V	5VSB	DC/AC (Watts)	Efficiency	Fan Speed (RPM)	PSU Noise (dB[A])	Temps (In/Out)	PF/AC Volts
10%	4.392A	1.988A	2.005A	0.991A	75.01	85.965%	0	<6.0	44.13°C	0.853
	12.163V	5.029V	3.292V	5.045V	87.257				40.07°C	230.23V
20%	9.794A	2.985A	3.008A	1.192A	149.966	90.282%	0	<6.0	45.19°C	0.939
	12.157V	5.025V	3.292V	5.032V	166.108				40.87°C	230.23V
30%	15.572A	3.485A	3.514A	1.372A	224.979	92.221%	0	<6.0	45.55°C	0.963
	12.133V	5.021V	3.287V	5.102V	243.957				41°C	230.23V
40%	21.352A	3.987A	4.018A	1.57A	300.081	92.408%	412	7.7	41.69°C	0.974
	12.125V	5.017V	3.285V	5.095V	324.736				46.43°C	230.23V
50%	26.755A	4.988A	5.023A	1.771A	374.678	92.211%	412	7.7	42.45°C	0.98
	12.116V	5.013V	3.285V	5.083V	406.325				47.53°C	230.23V
60%	32.189A	5.99A	6.028A	1.972A	449.579	91.864%	618	16.7	42.76°C	0.983
	12.109V	5.009V	3.285V	5.071V	489.396				49.24°C	230.23V
70%	37.617A	6.991A	7.02A	2.173A	524.232	91.503%	764	23.6	43.09°C	0.985
	12.099V	5.006V	3.29V	5.062V	572.914				50.13°C	230.18V
80%	43.132A	7.997A	8.021A	2.276A	599.44	91.041%	975	31.4	43.43°C	0.987
	12.092V	5.002V	3.29V	5.053V	658.429				51.67°C	230.18V
90%	48.983A	8.503A	8.511A	2.38A	674.485	90.506%	1294	40.1	44.46°C	0.988
	12.086V	4.998V	3.289V	5.043V	745.241				53.56°C	230.18V
100%	54.645A	9.011A	9.033A	2.988A	749.709	89.905%	1625	46.2	45.61°C	0.989
	12.078V	4.994V	3.287V	5.021V	833.894				55.72°C	230.19V
110%	60.190A	10.021A	10.126A	2.993A	824.774	89.229%	1968	50.5	47.31°C	0.99
	12.069V	4.99V	3.288V	5.012V	924.331				58.44°C	230.19V
CL1	0.115A	14.41A	14.306A	0A	121.297	84.4%	441	8.2	43.32°C	0.926
	12.154V	5.011V	3.334V	5.048V	143.716				48.46°C	230.2V
CL2	0.115A	21.918A	0A	0A	111.408	82.485%	439	8.2	42.03°C	0.92
	12.162V	5.02V	3.281V	5.057V	135.065				49.24°C	230.2V
CL3	0.115A	0A	21.566A	0A	73.975	78.486%	438	8.2	40.79°C	0.867
	12.160V	5.019V	3.366V	5.054V	94.252				50.23°C	230.21V
CL4	62.004A	0A	0A	0A	749.567	90.755%	1611	46.0	45.96°C	0.989
	12.089V	5.018V	3.262V	5.106V	825.929				57.12°C	230.2V

All data and graphs included in this test report can be used by any individual on the following conditions:

- > It should be mentioned that the test results are provided by Cybenetics
- > The link to the original test results document should be provided in any case

PAGE 15/17

20-80W LOAD TESTS 230V

Test	12V	5V	3.3V	5VSB	DC/AC (Watts)	Efficiency	Fan Speed (RPM)	PSU Noise (dB[A])	Temps (In/Out)	PF/AC Volts
20W	1.222A	0.495A	0.5A	0.197A	20.009	55.071%	0	<6.0	40.24°C	0.614
	12.162V	5.048V	3.298V	5.072V	36.334				37.15°C	230.23V
40W	2.688A	0.694A	0.7A	0.296A	40.007	80.607%	0	<6.0	41.01°C	0.712
	12.161V	5.047V	3.297V	5.067V	49.633				37.66°C	230.23V
60W	4.156A	0.893A	0.902A	0.395A	60.007	84.787%	0	<6.0	42.1°C	0.808
	12.161V	5.037V	3.292V	5.063V	70.774				38.5°C	230.24V
80W	5.620A	1.093A	1.103A	0.494A	79.967	87.376%	0	<6.0	43.19°C	0.862
	12.161V	5.032V	3.29V	5.058V	91.521				39.36°C	230.24V

RIPPLE MEASUREMENTS 230V

Test	12V	5V	3.3V	5VSB	Pass/Fail
10% Load	6.04mV	9.14mV	5.58mV	3.89mV	Pass
20% Load	6.14mV	8.58mV	5.73mV	3.94mV	Pass
30% Load	16.29mV	9.76mV	6.09mV	4.30mV	Pass
40% Load	13.68mV	9.50mV	6.24mV	5.84mV	Pass
50% Load	12.61mV	9.75mV	6.55mV	5.48mV	Pass
60% Load	11.79mV	10.26mV	7.47mV	5.53mV	Pass
70% Load	11.44mV	10.83mV	6.90mV	6.09mV	Pass
80% Load	11.95mV	11.03mV	9.26mV	6.70mV	Pass
90% Load	12.54mV	11.03mV	9.87mV	6.96mV	Pass
100% Load	20.67mV	12.63mV	10.18mV	9.73mV	Pass
110% Load	22.00mV	12.84mV	10.99mV	10.14mV	Pass
Crossload1	8.64mV	13.20mV	10.22mV	8.22mV	Pass
Crossload2	8.34mV	14.71mV	7.67mV	8.75mV	Pass
Crossload3	7.01mV	9.76mV	11.91mV	7.93mV	Pass
Crossload4	19.94mV	11.42mV	7.15mV	10.30mV	Pass

All data and graphs included in this test report can be used by any individual on the following conditions:


- > It should be mentioned that the test results are provided by Cybenetics
- > The link to the original test results document should be provided in any case

Anex

MSI MPG A750G




Top side

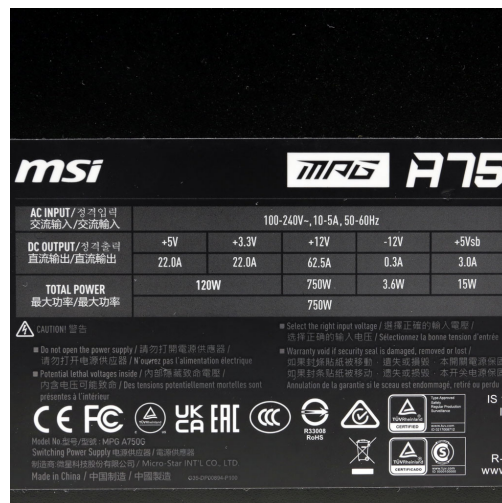

Power specifications label

CERTIFICATIONS 115V

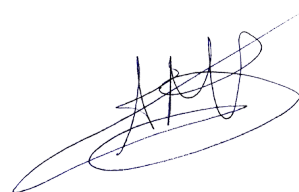Aristeidis Bitziopoulos
Lab Director

CERTIFICATIONS 230V



All data and graphs included in this test report can be used by any individual on the following conditions:

- > It should be mentioned that the test results are provided by Cybenetics
- > The link to the original test results document should be provided in any case

PAGE 17/17